



Test Report

FCC Part15 Subpart C

Product Name : WIRELESS-BGN 2X2 NETWORK MINI PCIE
ADAPTER

Model No. : WLE200N2

FCC ID : TK4WLE200N2

Applicant : Compex Systems Pte Ltd

Address : 135 Joo Seng Road, #08-01 PM Industrial Building
Singapore 368363

Date of Receipt : 11/03/2013

Test Date : 12/03/2013~25/04/2013

Issued Date : 26/04/2013

Report No. : 133S022R-RF-US-P05V01

Report Version : V1.0

This case just change the name and address of the applicant, and there is no change for the software and hardware. The original test report(FCC ID: PPD-AR5B97) see as below.

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, CNAS or any agency of the Government.
The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

FCC TEST REPORT

REPORT NO.: RF980630H04

MODEL NO.: AR5B97

RECEIVED: June 30, 2009

TESTED: July 06 to 30, 2009

ISSUED: Aug. 06, 2009

APPLICANT: Atheros Communications, Inc.

ADDRESS: 5480 Great America Parkway, Santa Clara,
CA 95054

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

TEST LOCATION: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung
Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien
307, Taiwan

This test report consists of 142 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF ANTENNA	9
3.2.1	STANDARD APPLICABLE.....	9
3.2.2	ANTENNA CONNECTED CONSTRUCTION.....	9
3.3	DESCRIPTION OF TEST MODES	10
3.3.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	11
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.5	DESCRIPTION OF SUPPORT UNITS.....	15
3.6	CONFIGURATION OF SYSTEM UNDER TEST	15
4.	TEST TYPES AND RESULTS	16
4.1	CONDUCTED EMISSION MEASUREMENT	16
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	16
4.1.2	TEST INSTRUMENTS.....	16
4.1.3	TEST PROCEDURES	17
4.1.4	DEVIATION FROM TEST STANDARD	17
4.1.5	TEST SETUP	18
4.1.6	EUT OPERATING CONDITIONS	18
4.1.7	TEST RESULTS	19
4.2	RADIATED EMISSION MEASUREMENT	21
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	21
4.2.2	TEST INSTRUMENTS.....	22
4.2.3	TEST PROCEDURES	23
4.2.4	DEVIATION FROM TEST STANDARD	23
4.2.5	TEST SETUP	24
4.2.6	EUT OPERATING CONDITIONS	24
4.2.7	TEST RESULTS –DIPOLE ANTENNA.....	25
4.2.8	TEST RESULTS –PIFA ANTENNA	54
4.3	6dB BANDWIDTH MEASUREMENT	83
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	83
4.3.2	TEST INSTRUMENTS.....	83
4.3.3	TEST PROCEDURE.....	84
4.3.4	DEVIATION FROM TEST STANDARD	84
4.3.5	TEST SETUP	84
4.3.6	EUT OPERATING CONDITIONS	84



A D T

4.3.7	TEST RESULTS	85
4.4	MAXIMUM PEAK OUTPUT POWER.....	93
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	93
4.4.2	INSTRUMENTS.....	93
4.4.3	TEST PROCEDURES	94
4.4.4	DEVIATION FROM TEST STANDARD	94
4.4.5	TEST SETUP	94
4.4.6	EUT OPERATING CONDITIONS	94
4.4.7	TEST RESULTS	95
4.5	AVERAGE OUTPUT POWER.....	97
4.5.1	FOR REFERENCE.....	97
4.5.2	TEST INSTRUMENTS.....	97
4.5.3	TEST PROCEDURES	98
4.5.4	TEST SETUP	98
4.5.5	EUT OPERATING CONDITIONS	98
4.5.6	TEST RESULTS	99
4.6	POWER SPECTRAL DENSITY MEASUREMENT.....	101
4.6.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	101
4.6.2	TEST INSTRUMENTS.....	101
4.6.3	TEST PROCEDURE.....	102
4.6.4	DEVIATION FROM TEST STANDARD	102
4.6.5	TEST SETUP	102
4.6.6	EUT OPERATING CONDITION	102
4.6.7	TEST RESULTS	103
4.7	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	131
4.7.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	131
4.7.2	TEST INSTRUMENTS.....	131
4.7.3	TEST PROCEDURE.....	131
4.7.4	DEVIATION FROM TEST STANDARD	132
4.7.5	EUT OPERATING CONDITION.....	132
4.7.6	TEST RESULTS	132
5.	INFORMATION ON THE TESTING LABORATORIES	141
6.	APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	142

1. CERTIFICATION

PRODUCT: 802.11n 2x2 Minicard
BRAND NAME: Atheros
MODEL NO.: AR5B97
TEST SAMPLE: R&D SAMPLE
TESTED: July 06 to 30, 2009
APPLICANT: Atheros Communications, Inc.
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: AR5B97) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and was in compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** Aug. 06, 2009
(Midoli Peng, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Aug. 06, 2009
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Aug. 06, 2009
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is –16.68dB at 0.209MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is –0.58dB at 2483.5MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.44 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11n 2x2 Minicard
MODEL NO.	AR5B97
FCC ID	PPD-AR5B97
POWER SUPPLY	DC 3.3V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11 / 5.5 / 2 / 1Mbps 802.11a / g: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps HT20 MCS0~7 (800ns GI): 65 / 58.5 / 52 / 39 / 26 / 19.5 / 13 / 6.5Mbps. HT20 MCS8~15 (800ns GI): 130 / 117 / 104 / 78 / 52 / 39 / 26 / 13Mbps. HT40 MCS0~7 (800ns GI): 135 / 121.5 / 108 / 81 / 54 / 40.5 / 27 / 13.5Mbps. HT40 MCS8~15 (800ns GI): 270 / 243 / 216 / 162 / 108 / 81 / 54 / 27Mbps. HT40 MCS0~7 (400ns GI): 150 / 135 / 120 / 90 / 60 / 45 / 30 / 15 HT40 MCS8~15 (400ns GI): 300 / 270 / 240 / 180 / 120 / 90 / 60 / 30
FREQUENCY RANGE	2412 ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 159.809mW 802.11g: 509.854mW draft 802.11n (20MHz): 504.509mW draft 802.11n (40MHz): 466.057mW
ANTENNA TYPE	Dipole antenna / PIFA antenna
DATA CABLE	NA
I/O PORT	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT incorporates CDD function with 802.11b, 802.11g and MIMO function with draft 802.11n .
2. The EUT is 2 * 2 spatial MIMO (2Tx & 2Rx) without beam forming function. The antenna configurations are two transmitter antennas and two receiver antennas, as there are 2 Dipole antennas or PIFA antennas. Spatial multiplexing modes for simultaneous transmission using 2 antennas, and for simultaneous receiver using 2 antennas.
3. There are two different versions of DUT, the only difference is version -141 has switch regulator installed, and version -041 has the transistors installed instead of switch regulator. The worst-case scenario has been investigated with the same output power, which version -141 shows the worst results on conducted emission, and version -041 shows the worst results on radiated emission. The test data reflects the worst-case scenarios.
4. The EUT was pre-tested under the following modes:

Test Mode	Data rate
Mode A	400ns GI
Mode B	800ns GI

From the above modes, the worst case was found in **Mode B**. Therefore only the test data of the mode was recorded in this report.

5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF ANTENNA

3.2.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 ANTENNA CONNECTED CONSTRUCTION

There are two sets of antennas provided to this EUT, please refer to the following table:

Set 1					
Transmitter Circuit	Brand	Model	Antenna Type	Antenna Gain (dBi)	Antenna Connector
Chain(0)	Inpaq	DAMA1BM3000402	Dipole	3.2	RPSMA
Chain(1)	Inpaq	DAMA1BM3000402	Dipole	3.2	RPSMA
Set 2					
Transmitter Circuit	Brand	Model	Antenna Type	Antenna Gain (dBi)	Antenna Connector
Chain(0)	Wistron	81.EBJ15.005	PIFA	3.6	IPEX
Chain(1)	Wistron	81.EBJ15.005	PIFA	3.6	IPEX

3.3 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.3.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

ANTENNA COMBINATION MODE:

COMBINATION MODE	OPERATION MODE	CHAIN(0) (TX)	CHAIN(1) (TX)
A	802.11b	√	√
B	802.11g	√	√
C	DRAFT 802.11n(20MHz)	√	√
D	DRAFT 802.11n(40MHz)	√	√
Note: 1. The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.			

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
For 2.4 GHz 802.11b	1 to 11	1	DSSS	DBPSK	1	A

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
For 2.4 GHz 802.11b	1 to 11	1	DSSS	DBPSK	1	A

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	B
For 2.4 GHz Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	C
For 2.4 GHz Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	D

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11b	1 to 11	1, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 11	OFDM	BPSK	6	B
For 2.4 GHz Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5	C
For 2.4 GHz Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5	D

ANTENNA PORT CONDUCTED MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	B
For 2.4 GHz Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	C
For 2.4 GHz Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	D

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an 802.11n 2x2 Minicard. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	Lenovo	0769	0769AUU	FCC DoC
2	EXTENSION CARD	Atheros	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

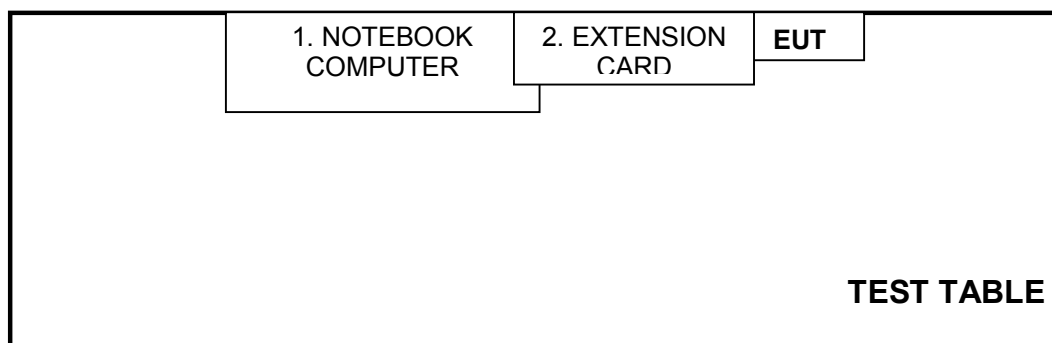

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 23, 2009	Mar. 22, 2010
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100071	Nov. 26, 2008	Nov. 25, 2009
Line-Impedance Stabilization Network (for EUT)	ESH3-Z5	848773/004	Nov. 05, 2008	Nov. 04, 2009
RF Cable (JYEBAO)	5DFB	COBCAB-001	Aug. 15, 2008	Aug. 14, 2009
50 ohms Terminator	50	3	Nov. 05, 2008	Nov. 04, 2009
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

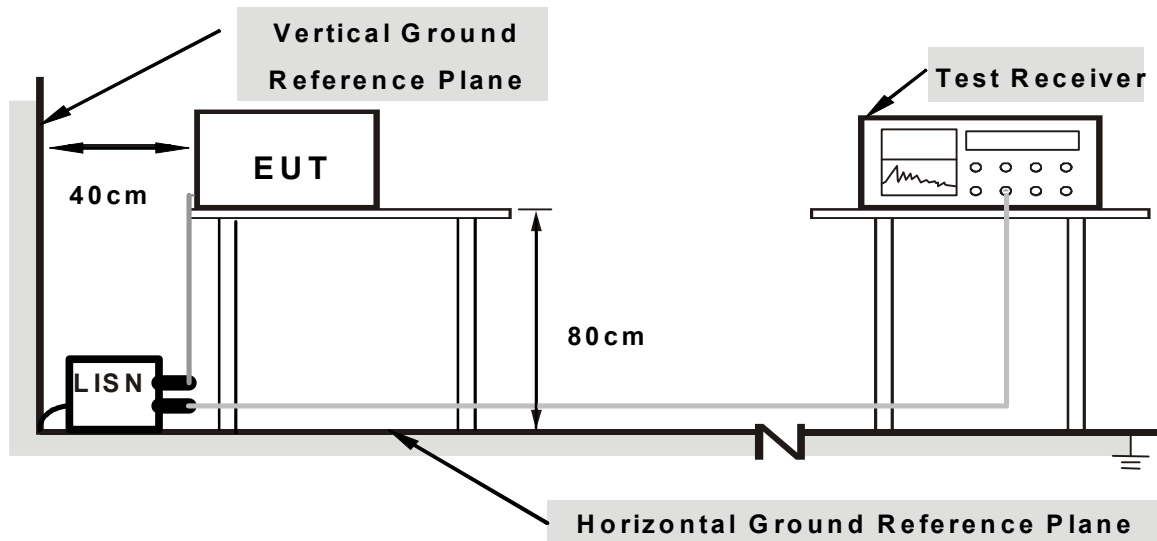

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Connect the EUT with support unit 1 (Notebook computer) which placed on a testing table.
- b. Support unit 1 (Notebook computer) run test program “ART v0 9 b4” to allow EUT to transmit continuously at specific channel frequency.


4.1.7 TEST RESULTS

802.11b DSSS MODULATION :

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line (L)
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	28deg. C, 60%RH, 962hPa	TESTED BY	Rex Huang

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. (dB)	AV. (dB)
1	0.150	0.19	41.70	-	41.89	-	66.00	56.00	-24.11	-
2	0.205	0.23	45.53	-	45.76	-	63.42	53.42	-17.66	-
+3	0.552	0.42	37.41	-	37.83	-	56.00	46.00	-18.17	-
4	3.102	0.50	29.17	-	29.67	-	56.00	46.00	-26.33	-
5	5.246	0.61	37.77	-	38.38	-	60.00	50.00	-21.62	-
6	9.113	0.69	30.82	-	31.51	-	60.00	50.00	-28.49	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

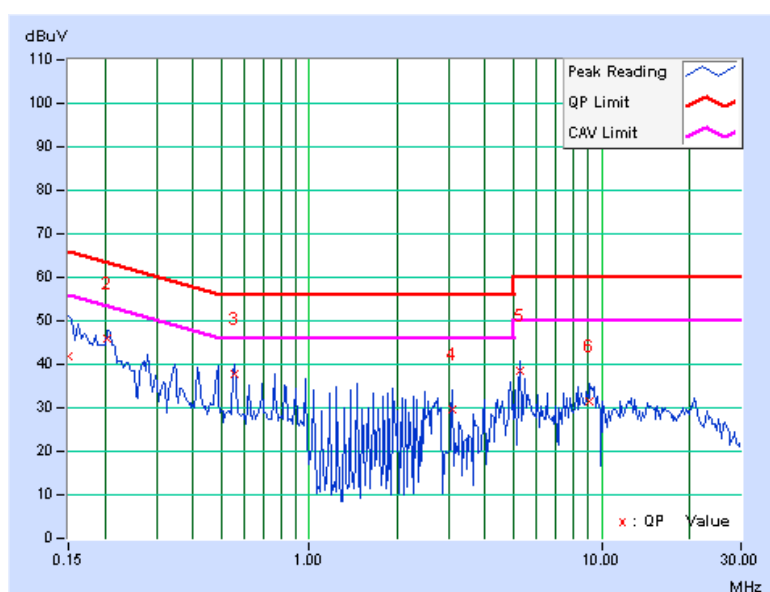

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Neutral (N)
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	28deg. C, 60%RH, 962hPa	TESTED BY	Rex Huang

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor [dB]	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB]	AV. [dB]
+1	0.209	0.16	46.42	-	46.58	-	63.26	53.26	-16.68	-
2	0.275	0.24	40.39	-	40.63	-	60.97	50.97	-20.33	-
3	0.970	0.21	25.85	-	26.06	-	56.00	46.00	-29.94	-
4	4.074	0.51	33.72	-	34.23	-	56.00	46.00	-21.77	-
5	5.320	0.52	36.32	-	36.84	-	60.00	50.00	-23.16	-
6	13.738	0.81	26.61	-	27.42	-	60.00	50.00	-32.58	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

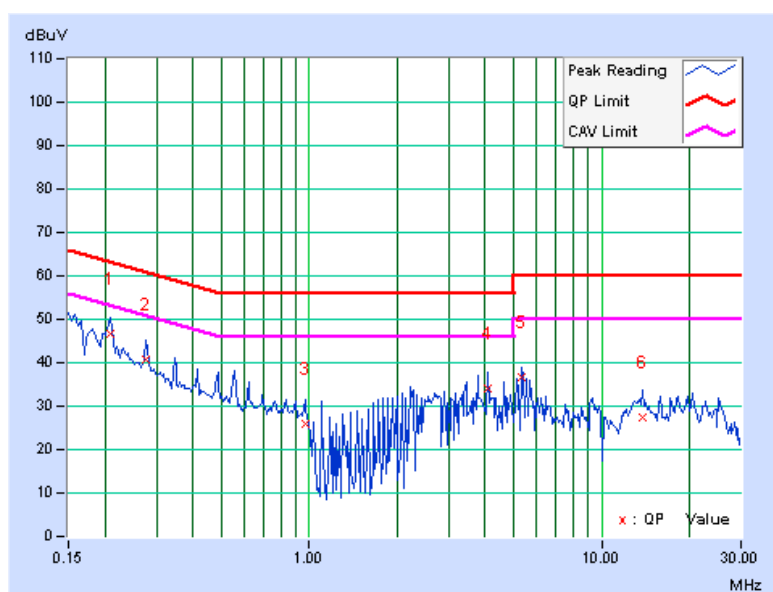

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 9, 2008	Dec. 8, 2009
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	Apr. 24, 2009	Apr. 23, 2010
HP Pre_Amplifier	8449B	3008A01923	Nov. 10, 2008	Nov. 9, 2009
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 9, 2009	Sep. 8, 2010
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 29, 2009	April 28, 2010
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 09, 2008	Dec. 08, 2009
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2009	Jan. 21, 2010
RF Switches	EMH-011	08009	Oct. 07, 2008	Oct. 06, 2009
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 15, 2008	Aug. 14, 2009
RF Cable	8DFB	STCCAB-30M-1GHz	Oct. 07, 2008	Oct. 06, 2009
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 7450G-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

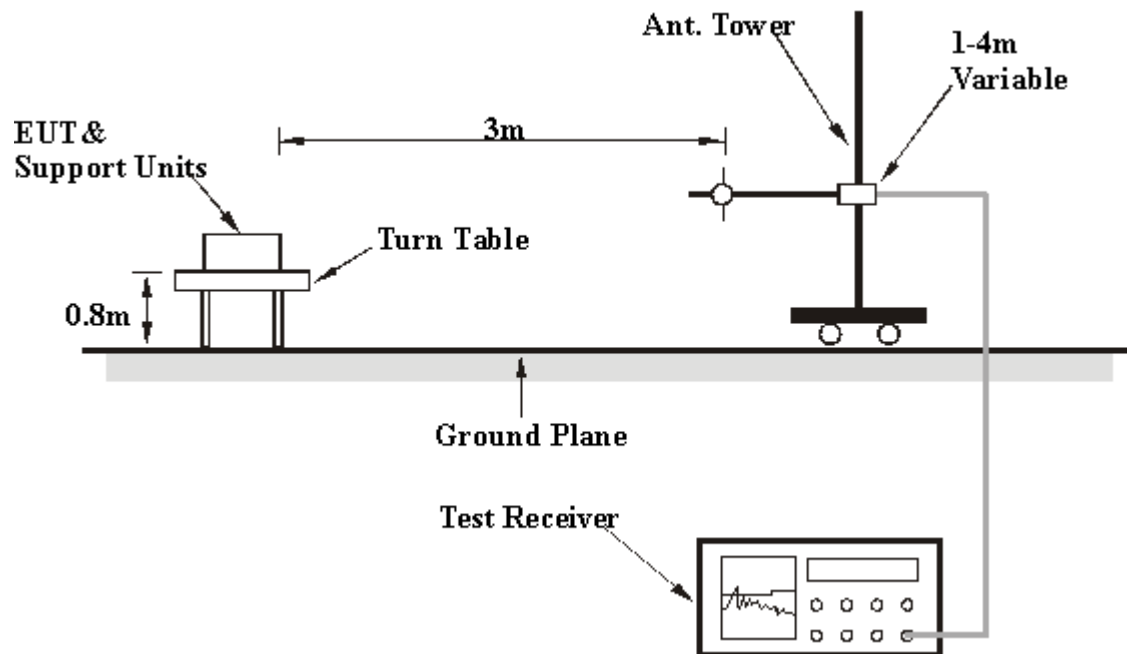

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as the 4.1.6



A D T

4.2.7 TEST RESULTS –DIPOLE ANTENNA

BELOW 1GHz WORST-CASE DATA : 802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	28.0deg. C, 57.0%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	150.51	27.33 QP	43.50	-16.17	1.36 H	96	11.54	15.79
2	199.72	34.81 QP	43.50	-8.69	1.01 H	231	22.40	12.41
3	208.78	31.23 QP	43.50	-12.27	1.60 H	333	18.51	12.72
4	322.80	27.14 QP	46.00	-18.86	1.30 H	222	9.75	17.39
5	400.00	33.13 QP	46.00	-12.87	1.02 H	54	13.63	19.50
6	663.26	33.30 QP	46.00	-12.70	1.30 H	213	7.64	25.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	150.33	29.45 QP	43.50	-14.05	1.02 V	246	13.65	15.80
2	199.89	31.20 QP	43.50	-12.30	1.47 V	85	18.80	12.40
3	299.69	35.23 QP	46.00	-10.77	1.32 V	62	18.47	16.76
4	381.59	35.03 QP	46.00	-10.97	1.03 V	63	16.04	18.99
5	400.25	33.92 QP	46.00	-12.08	1.01 V	247	14.41	19.51
6	499.60	37.62 QP	46.00	-8.38	1.32 V	69	15.14	22.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	55.78 PK	74.00	-18.22	1.13 H	166	25.51	30.27
2	2386.00	41.72 AV	54.00	-12.28	1.13 H	166	11.45	30.27
3	*2412.00	98.80 PK			1.13 H	166	68.44	30.36
4	*2412.00	96.05 AV			1.13 H	166	65.69	30.36
5	4824.00	48.40 PK	74.00	-25.60	1.41 H	152	11.61	36.79
6	4824.00	42.80 AV	54.00	-11.20	1.41 H	152	6.01	36.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2387.00	55.90 PK	74.00	-18.10	1.46 V	105	25.63	30.27
2	2387.00	43.01 AV	54.00	-10.99	1.46 V	105	12.74	30.27
3	*2412.00	106.84 PK			1.45 V	104	76.48	30.36
4	*2412.00	104.35 AV			1.45 V	104	73.99	30.36
5	4824.00	53.20 PK	74.00	-20.80	1.35 V	109	16.41	36.79
6	4824.00	51.10 AV	54.00	-2.90	1.35 V	109	14.31	36.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.00 PK			1.33 H	162	69.54	30.46
2	*2437.00	97.46 AV			1.33 H	162	67.00	30.46
3	4874.00	48.14 PK	74.00	-25.86	1.43 H	117	11.22	36.92
4	4874.00	43.20 AV	54.00	-10.80	1.43 H	117	6.28	36.92
5	7311.00	49.71 PK	74.00	-24.29	1.06 H	315	6.57	43.14
6	7311.00	37.80 AV	54.00	-16.20	1.06 H	315	-5.34	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.50 PK			1.40 V	97	80.04	30.46
2	*2437.00	107.89 AV			1.40 V	97	77.43	30.46
3	4874.00	52.90 PK	74.00	-21.10	1.30 V	109	15.98	36.92
4	4874.00	50.27 AV	54.00	-3.73	1.30 V	109	13.35	36.92
5	7311.00	50.20 PK	74.00	-23.80	1.12 V	343	7.06	43.14
6	7311.00	37.80 AV	54.00	-16.20	1.12 V	343	-5.34	43.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.50 PK			1.35 H	161	65.95	30.55
2	*2462.00	94.20 AV			1.35 H	161	63.65	30.55
3	2483.50	54.15 PK	74.00	-19.85	1.35 H	161	23.52	30.63
4	2483.50	41.39 AV	54.00	-12.61	1.35 H	161	10.76	30.63
5	4924.00	47.00 PK	74.00	-27.00	1.42 H	116	9.94	37.06
6	4924.00	39.20 AV	54.00	-14.80	1.42 H	116	2.14	37.06
7	7386.00	49.40 PK	74.00	-24.60	1.03 H	311	6.27	43.13
8	7386.00	37.70 AV	54.00	-16.30	1.03 H	311	-5.43	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.50 PK			1.39 V	93	78.95	30.55
2	*2462.00	106.99 AV			1.39 V	93	76.44	30.55
3	2483.50	55.70 PK	74.00	-18.30	1.19 V	93	25.07	30.63
4	2483.50	43.62 AV	54.00	-10.38	1.19 V	93	12.99	30.63
5	4924.00	51.50 PK	74.00	-22.50	1.33 V	105	14.44	37.06
6	4924.00	47.50 AV	54.00	-6.50	1.33 V	105	10.44	37.06
7	7386.00	49.60 PK	74.00	-24.40	1.10 V	339	6.47	43.13
8	7386.00	38.10 AV	54.00	-15.90	1.10 V	339	-5.03	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



RESTRICTED BANDEDGE (802.11b MODE,CH1, HORIZONTAL)

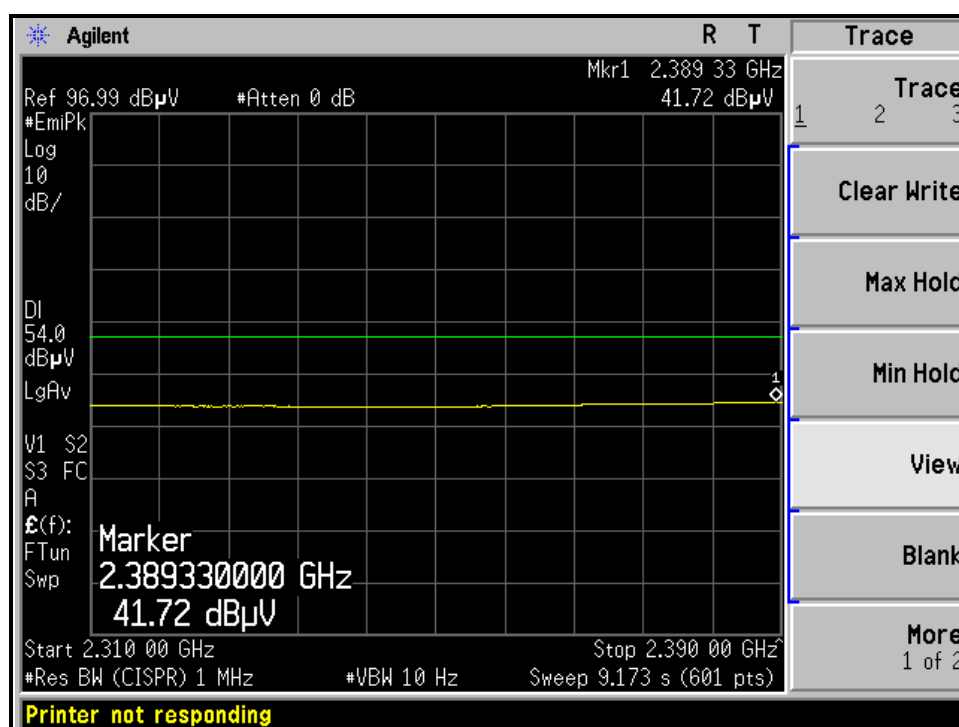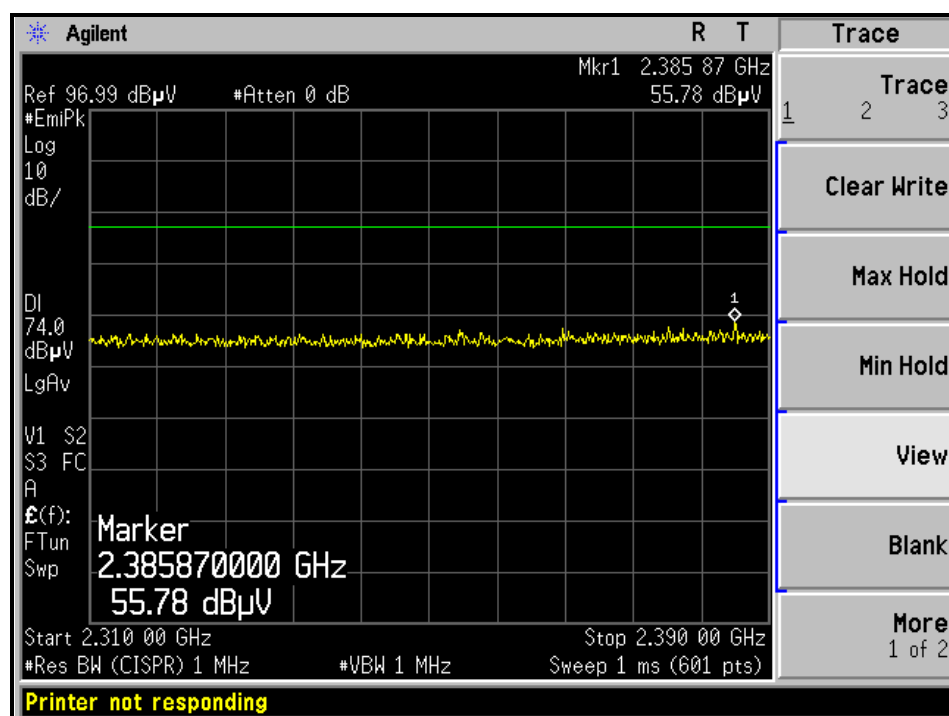



RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

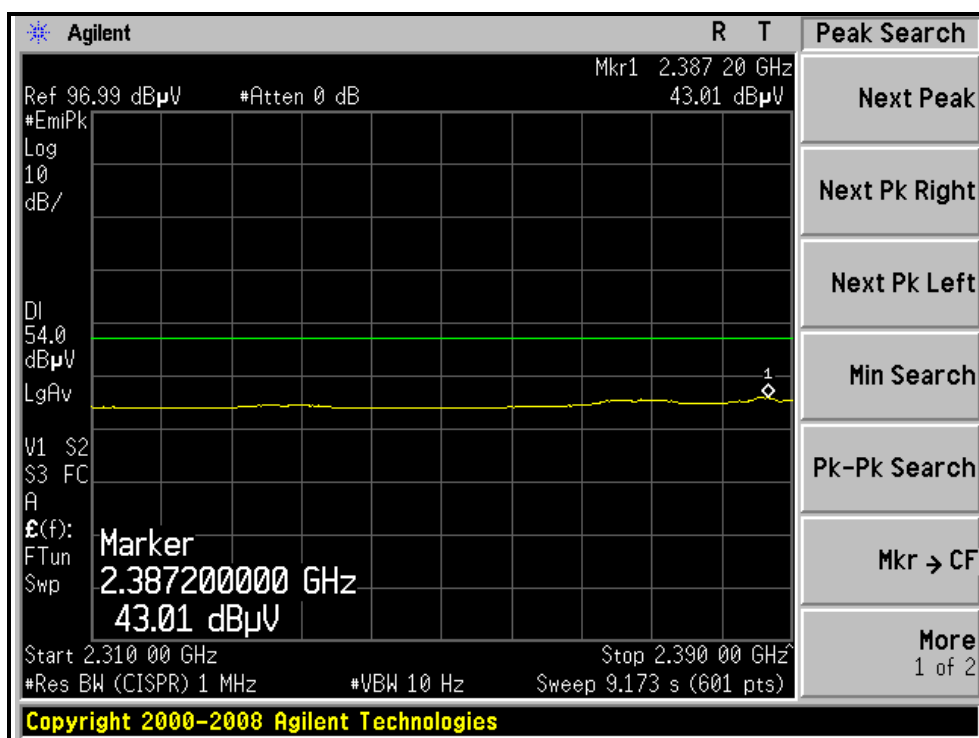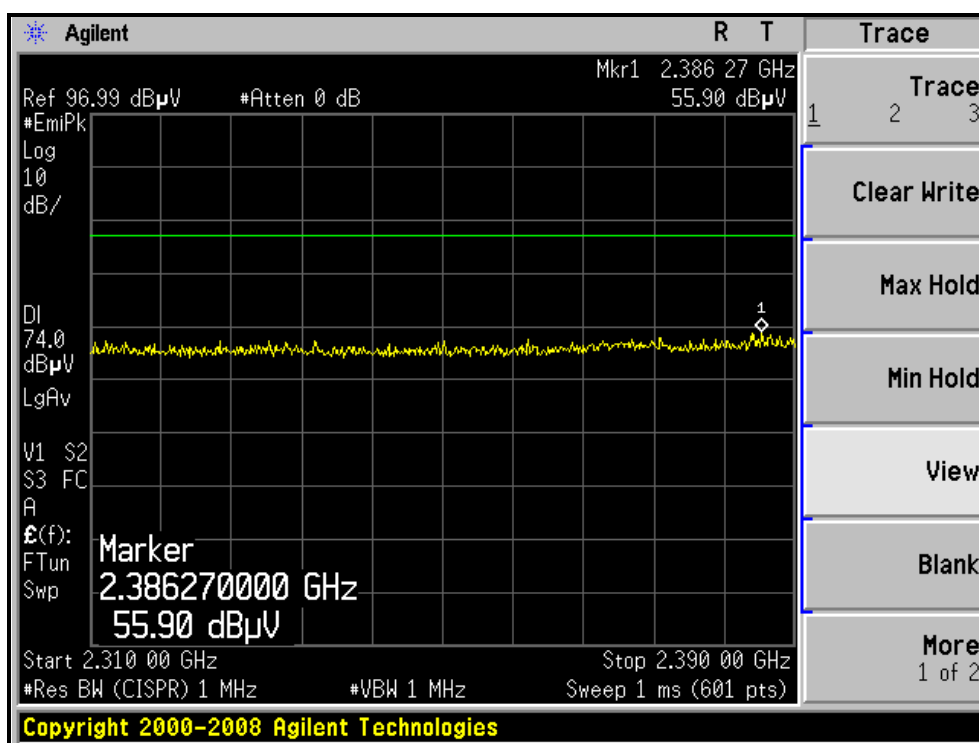

RESTRICTED BANDEDGE (802.11b MODE,CH11, HORIZONTAL)

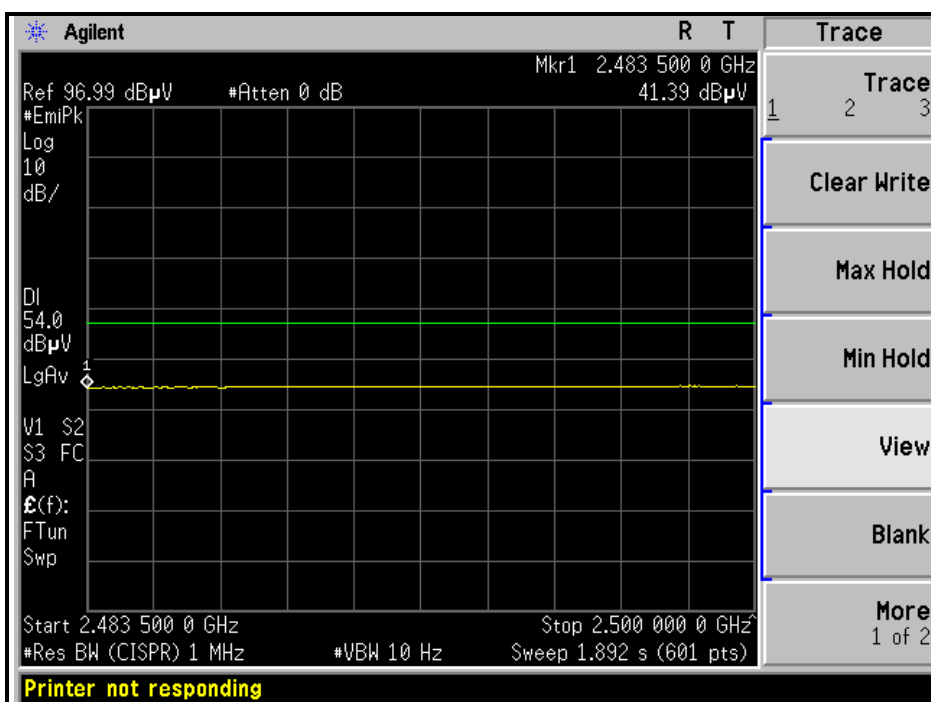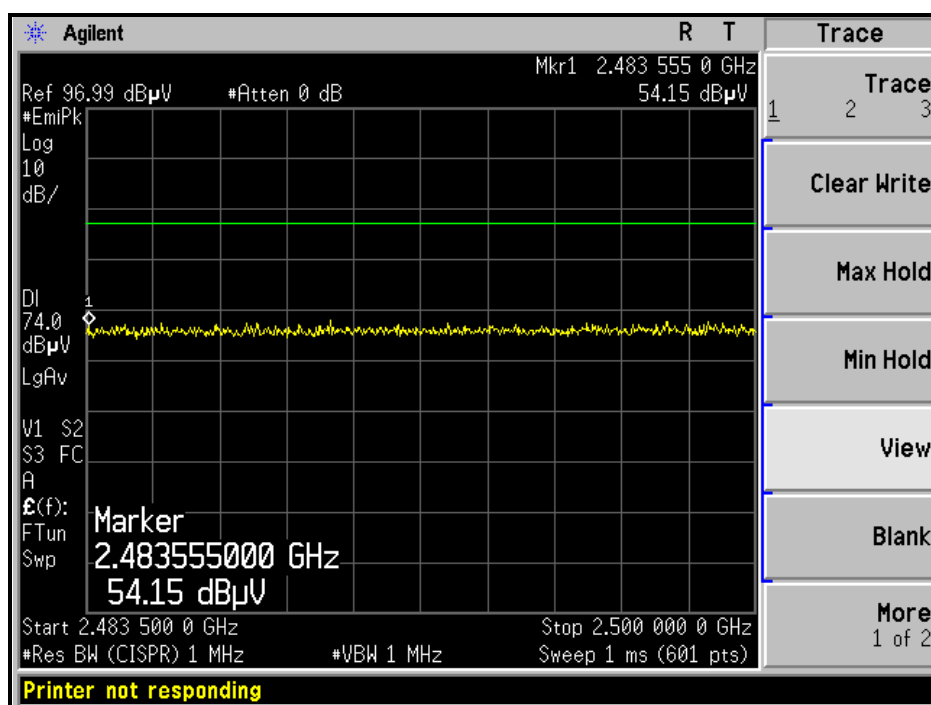

RESTRICTED BANDEDGE (802.11b MODE,CH11, VERTICAL)

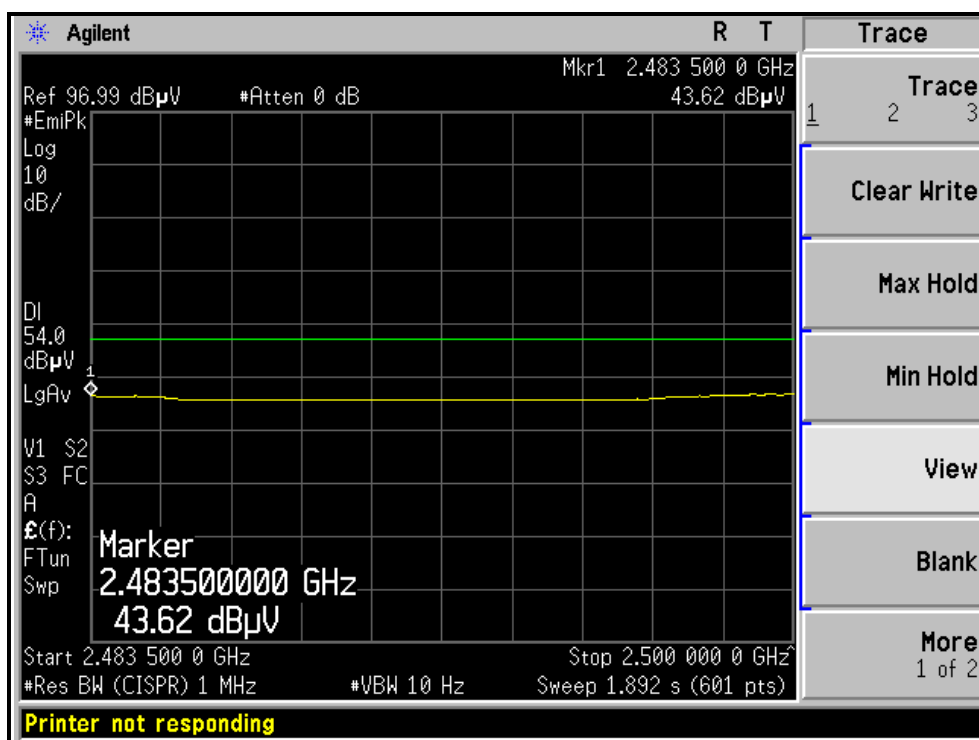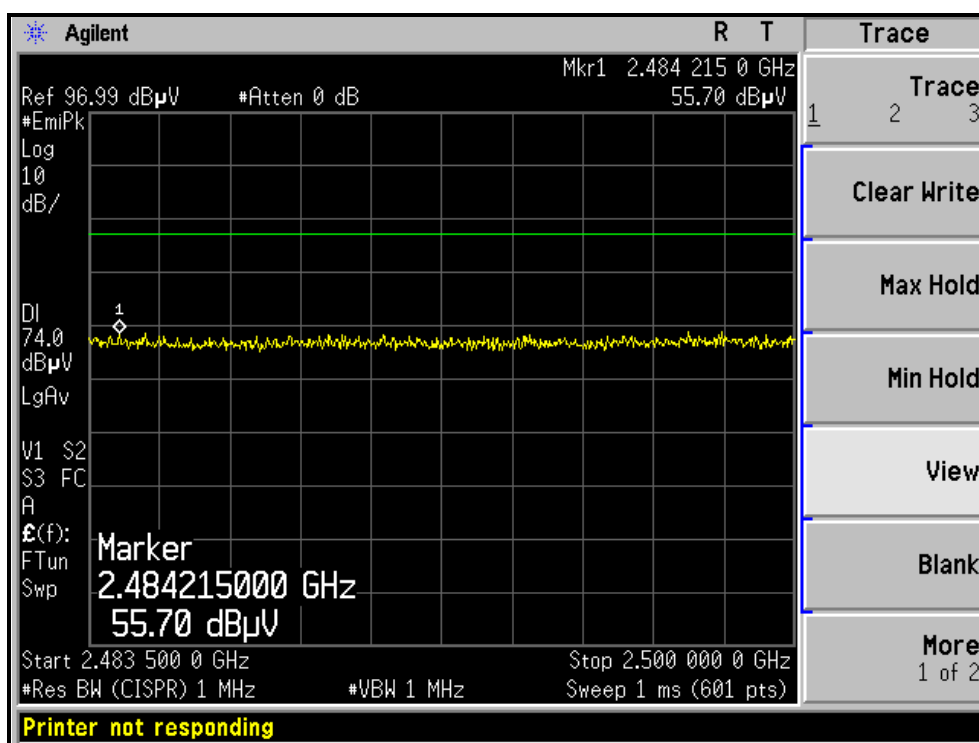



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.28 PK	74.00	-9.72	1.12 H	159	34.00	30.28
2	2390.00	45.78 AV	54.00	-8.22	1.12 H	159	15.50	30.28
3	*2412.00	98.44 PK			1.12 H	159	68.08	30.36
4	*2412.00	87.82 AV			1.12 H	159	57.46	30.36
5	4824.00	45.00 PK	74.00	-29.00	1.43 H	147	8.21	36.79
6	4824.00	32.60 AV	54.00	-21.40	1.43 H	147	-4.19	36.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.76 PK	74.00	-4.24	1.45 V	105	39.48	30.28
2	2390.00	52.17 AV	54.00	-1.83	1.45 V	105	21.89	30.28
3	*2412.00	107.70 PK			1.43 V	105	77.34	30.36
4	*2412.00	96.95 AV			1.43 V	105	66.59	30.36
5	4824.00	50.50 PK	74.00	-23.50	1.34 V	109	13.71	36.79
6	4824.00	36.00 AV	54.00	-18.00	1.34 V	109	-0.79	36.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.60 PK			1.33 H	164	72.14	30.46
2	*2437.00	92.05 AV			1.33 H	164	61.59	30.46
3	4874.00	48.10 PK	74.00	-25.90	1.45 H	113	11.18	36.92
4	4874.00	34.40 AV	54.00	-19.60	1.45 H	113	-2.52	36.92
5	7311.00	49.60 PK	74.00	-24.40	1.05 H	317	6.46	43.14
6	7311.00	37.90 AV	54.00	-16.10	1.05 H	317	-5.24	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	114.03 PK			1.40 V	97	83.57	30.46
2	*2437.00	102.42 AV			1.40 V	97	71.96	30.46
3	4874.00	53.50 PK	74.00	-20.50	1.32 V	111	16.58	36.92
4	4874.00	39.60 AV	54.00	-14.40	1.32 V	111	2.68	36.92
5	7311.00	49.90 PK	74.00	-24.10	1.13 V	341	6.76	43.14
6	7311.00	37.90 AV	54.00	-16.10	1.13 V	341	-5.24	43.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.52 PK			1.35 H	156	65.97	30.55
2	*2462.00	85.82 AV			1.35 H	156	55.27	30.55
3	2483.50	59.04 PK	74.00	-14.96	1.35 H	156	28.41	30.63
4	2483.50	43.76 AV	54.00	-10.24	1.35 H	156	13.13	30.63
5	4924.00	49.70 PK	74.00	-24.30	1.43 H	114	12.64	37.06
6	4924.00	31.80 AV	54.00	-22.20	1.43 H	114	-5.26	37.06
7	7386.00	49.50 PK	74.00	-24.50	1.07 H	308	6.37	43.13
8	7386.00	37.40 AV	54.00	-16.60	1.07 H	308	-5.73	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.08 PK			1.39 V	96	77.53	30.55
2	*2462.00	96.92 AV			1.39 V	96	66.37	30.55
3	2483.50	71.35 PK	74.00	-2.65	1.39 V	100	40.72	30.63
4	2483.50	51.42 AV	54.00	-2.58	1.39 V	100	20.79	30.63
5	4924.00	45.30 PK	74.00	-28.70	1.33 V	106	8.24	37.06
6	4924.00	33.00 AV	54.00	-21.00	1.33 V	106	-4.06	37.06
7	7386.00	49.50 PK	74.00	-24.50	1.11 V	337	6.37	43.13
8	7386.00	37.60 AV	54.00	-16.40	1.11 V	337	-5.53	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11g MODE,CH1, HORIZONTAL)

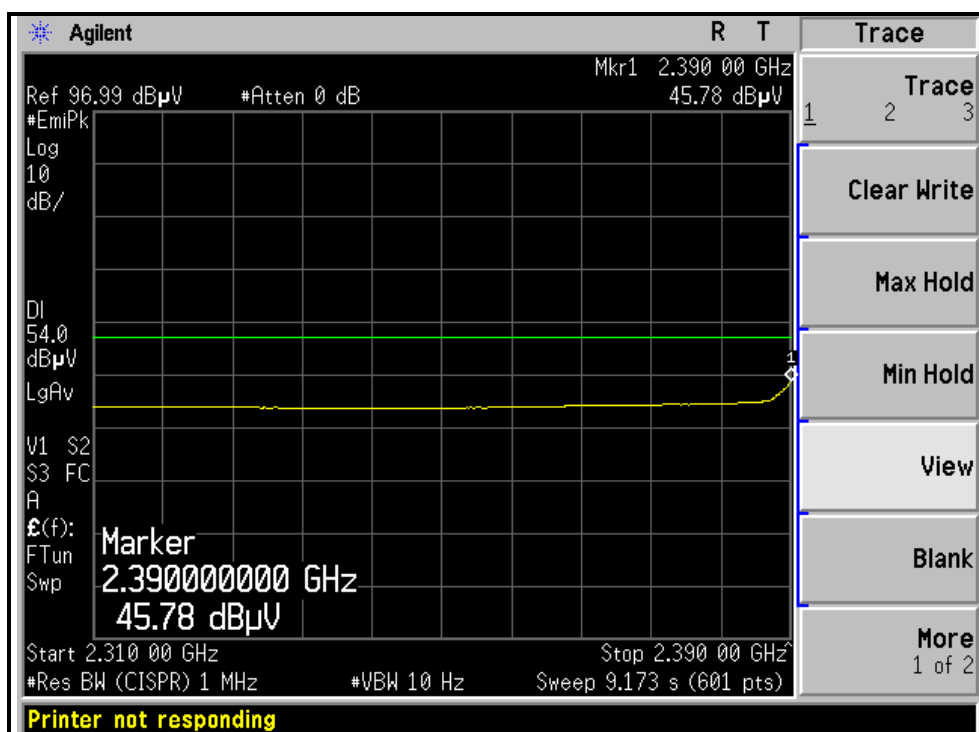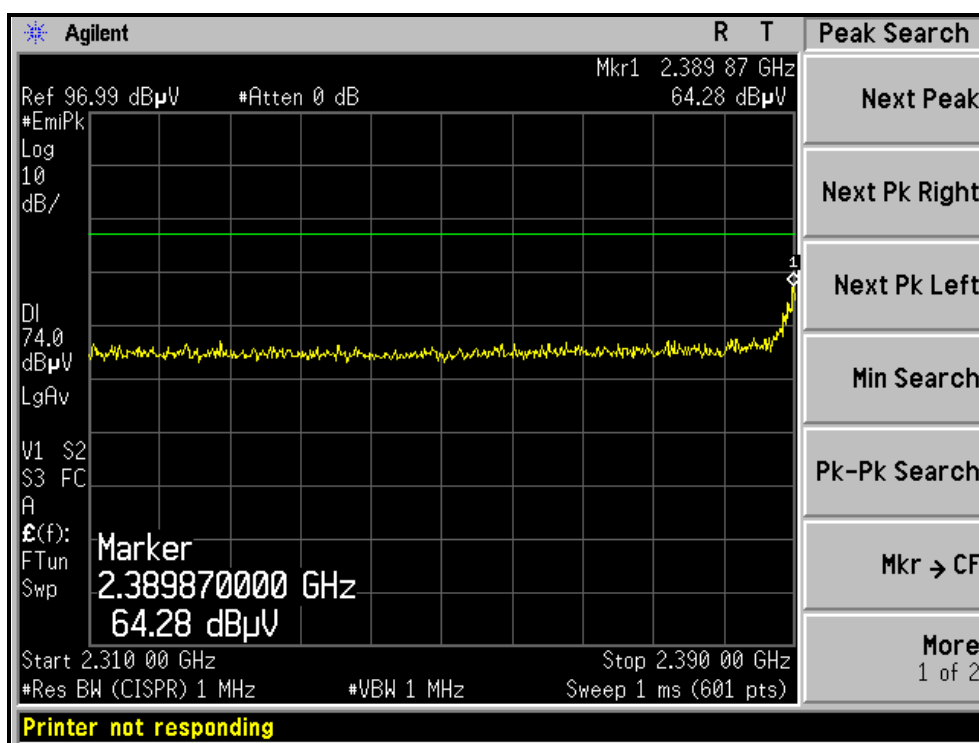



RESTRICTED BANDEDGE (802.11g MODE,CH1, VERTICAL)

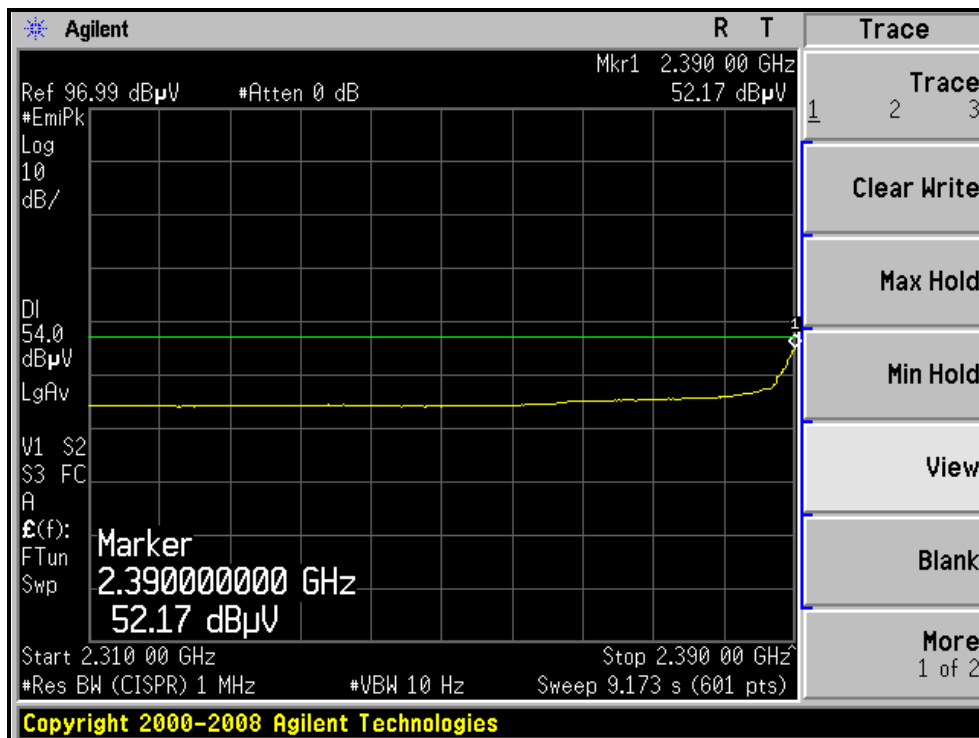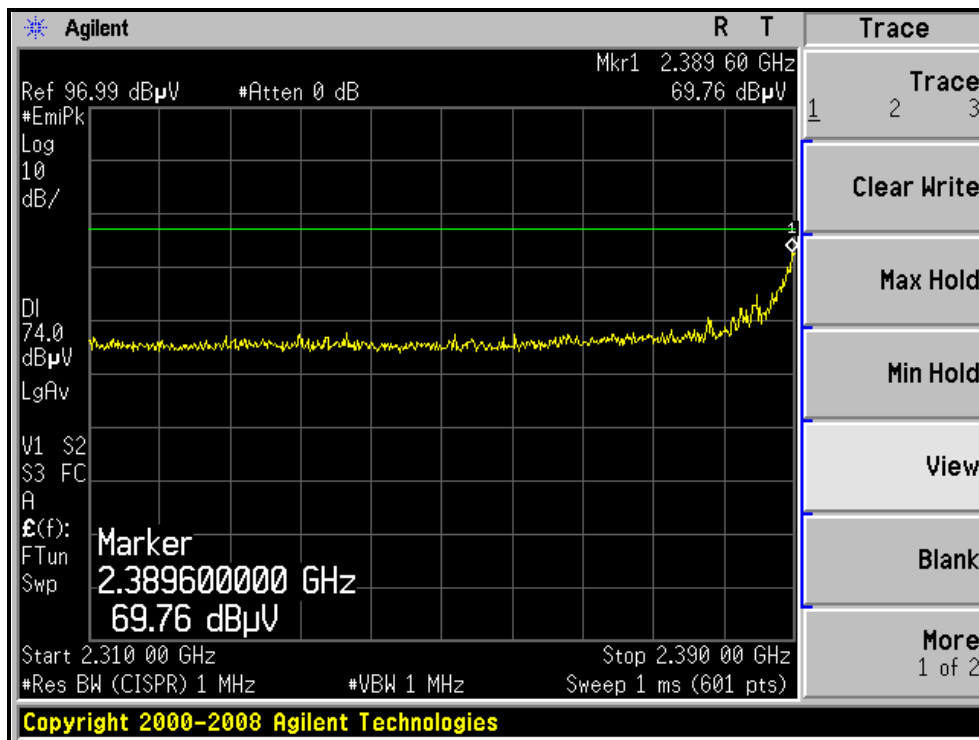

RESTRICTED BANDEDGE (802.11g MODE,CH11, HORIZONTAL)

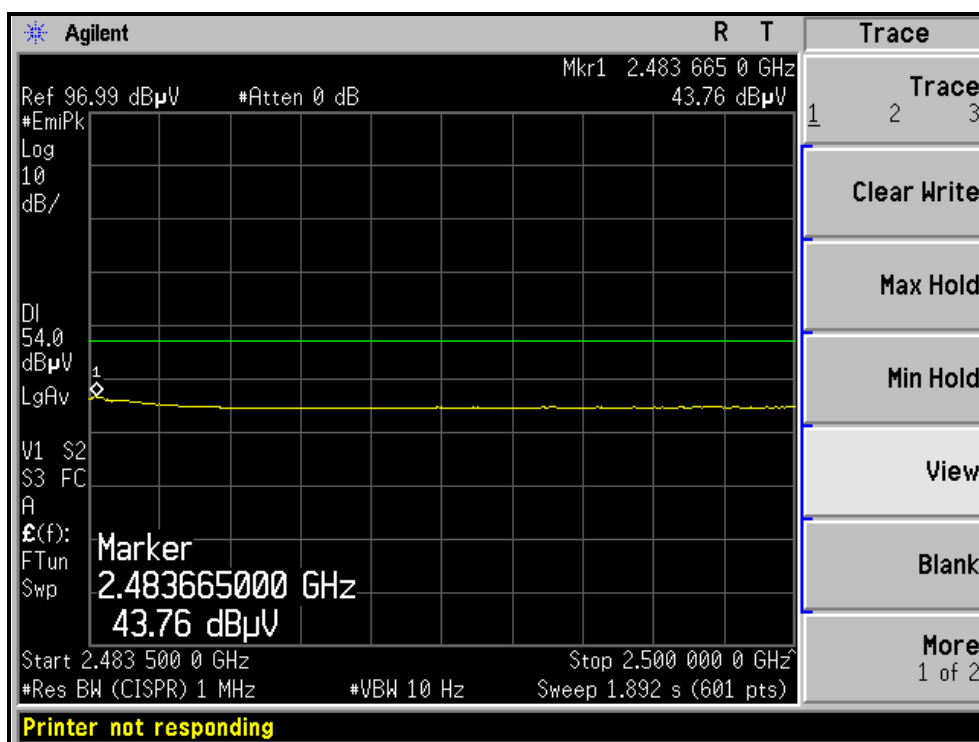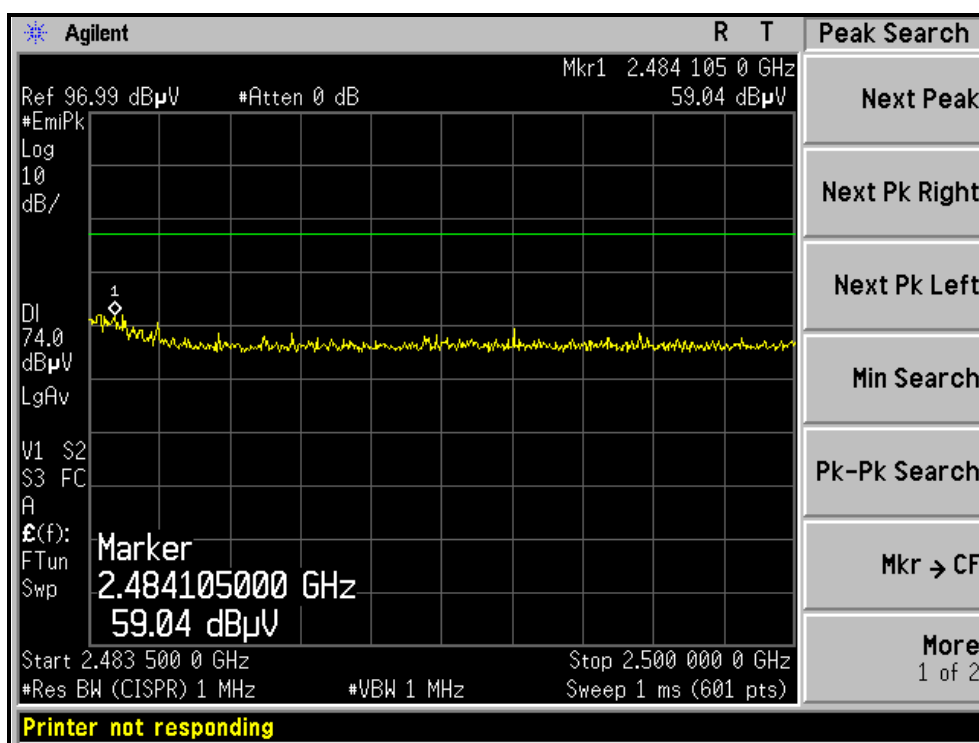

RESTRICTED BANDEDGE (802.11g MODE,CH11, VERTICAL)

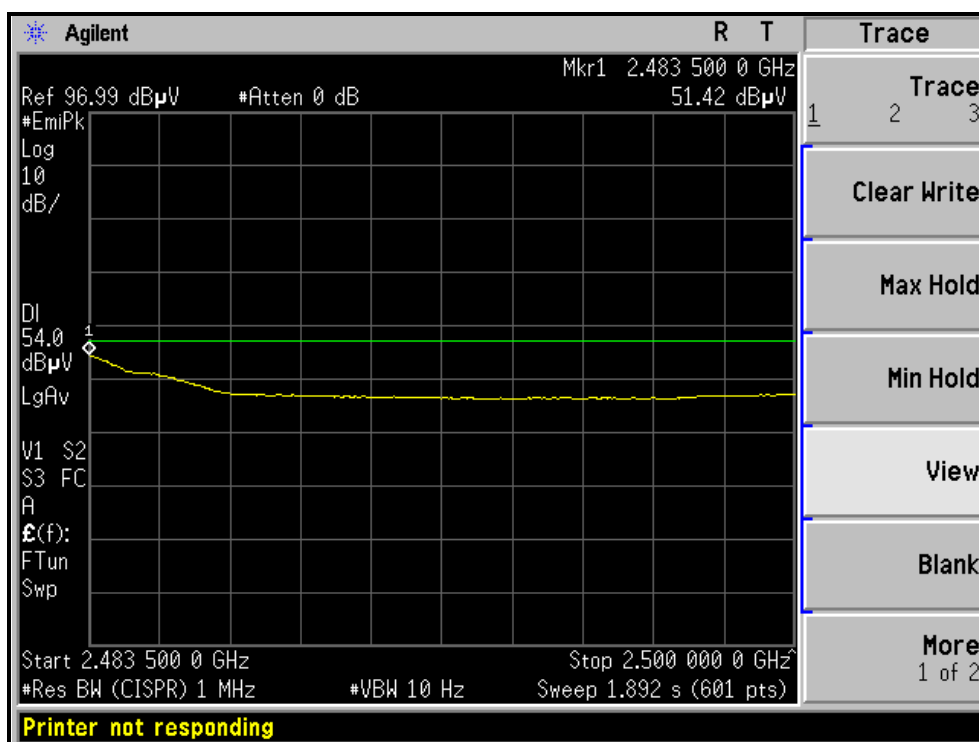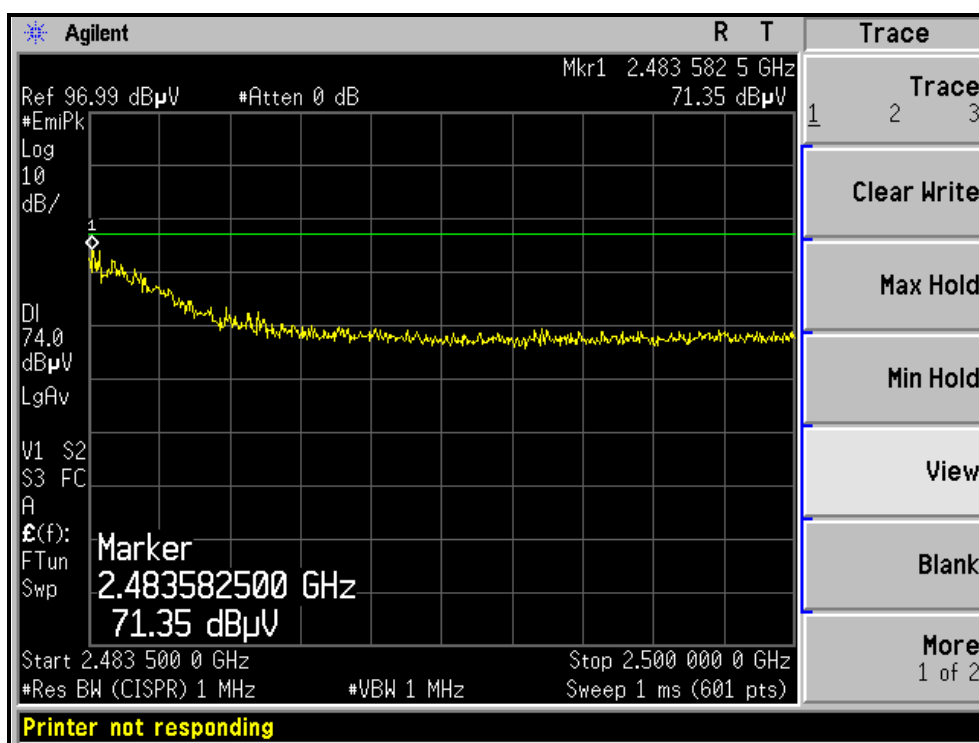



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.48 PK	74.00	-10.52	1.13 H	158	33.20	30.28
2	2390.00	45.87 AV	54.00	-8.13	1.13 H	158	15.59	30.28
3	*2412.00	98.35 PK			1.13 H	159	67.99	30.36
4	*2412.00	86.88 AV			1.13 H	159	56.52	30.36
5	4824.00	45.30 PK	74.00	-28.70	1.44 H	156	8.51	36.79
6	4824.00	32.40 AV	54.00	-21.60	1.44 H	156	-4.39	36.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.98 PK	74.00	-2.02	1.44 V	106	41.70	30.28
2	2390.00	52.89 AV	54.00	-1.11	1.44 V	106	22.61	30.28
3	*2412.00	106.19 PK			1.44 V	105	75.83	30.36
4	*2412.00	95.61 AV			1.44 V	105	65.25	30.36
5	4824.00	48.70 PK	74.00	-25.30	1.35 V	208	11.91	36.79
6	4824.00	35.10 AV	54.00	-18.90	1.35 V	208	-1.69	36.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.80 PK			1.32 H	161	72.34	30.46
2	*2437.00	91.31 AV			1.32 H	161	60.85	30.46
3	4874.00	47.40 PK	74.00	-26.60	1.43 H	117	10.48	36.92
4	4874.00	34.10 AV	54.00	-19.90	1.43 H	117	-2.82	36.92
5	7311.00	49.80 PK	74.00	-24.20	1.03 H	309	6.66	43.14
6	7311.00	37.90 AV	54.00	-16.10	1.03 H	309	-5.24	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.46 PK			1.39 V	96	83.00	30.46
2	*2437.00	102.00 AV			1.39 V	96	71.54	30.46
3	4874.00	53.00 PK	74.00	-21.00	1.33 V	109	16.08	36.92
4	4874.00	39.10 AV	54.00	-14.90	1.33 V	109	2.18	36.92
5	7311.00	49.87 PK	74.00	-24.13	1.11 V	335	6.73	43.14
6	7311.00	38.20 AV	54.00	-15.80	1.11 V	335	-4.94	43.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.26 PK			1.34 H	158	65.71	30.55
2	*2462.00	85.00 AV			1.34 H	158	54.45	30.55
3	2483.50	60.45 PK	74.00	-13.55	1.34 H	158	29.82	30.63
4	2483.50	44.14 AV	54.00	-9.86	1.34 H	158	13.51	30.63
5	4924.00	44.40 PK	74.00	-29.60	1.41 H	118	7.34	37.06
6	4924.00	31.60 AV	54.00	-22.40	1.41 H	118	-5.46	37.06
7	7386.00	49.50 PK	74.00	-24.50	1.26 H	314	6.37	43.13
8	7386.00	37.70 AV	54.00	-16.30	1.26 H	314	-5.43	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.97 PK			1.39 V	96	76.42	30.55
2	*2462.00	96.22 AV			1.39 V	96	65.67	30.55
3	2483.50	71.59 PK	74.00	-2.41	1.29 V	88	40.96	30.63
4	2483.50	50.72 AV	54.00	-3.28	1.29 V	88	20.09	30.63
5	4924.00	44.50 PK	74.00	-29.50	1.34 V	107	7.44	37.06
6	4924.00	32.50 AV	54.00	-21.50	1.34 V	107	-4.56	37.06
7	7386.00	49.70 PK	74.00	-24.30	1.12 V	338	6.57	43.13
8	7386.00	37.80 AV	54.00	-16.20	1.12 V	338	-5.33	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, HORIZONTAL)

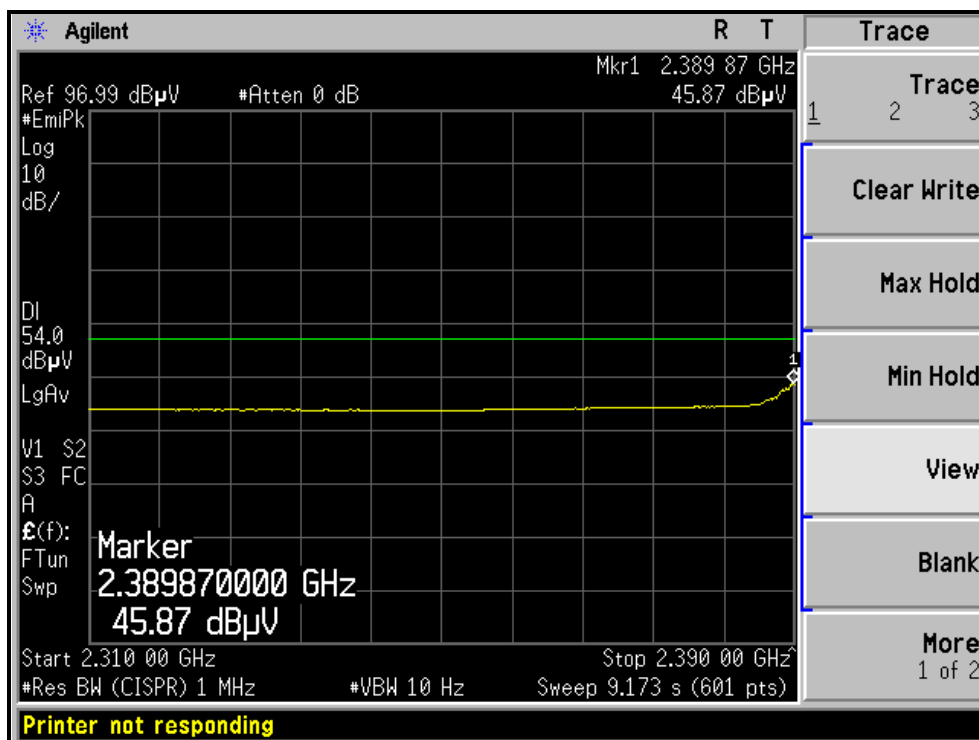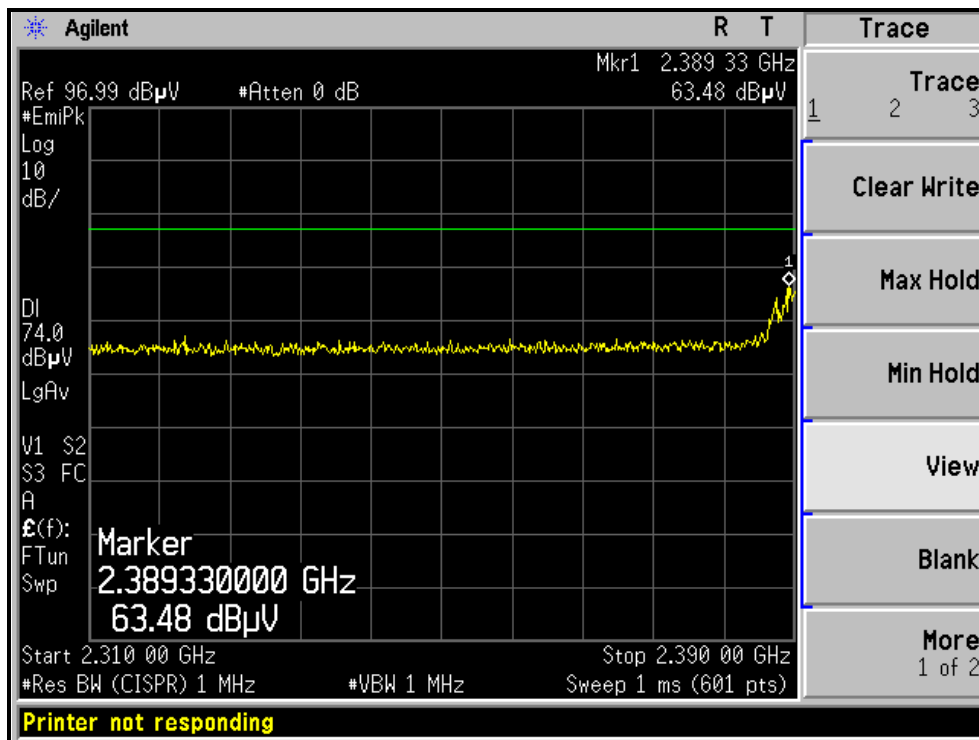



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, VERTICAL)

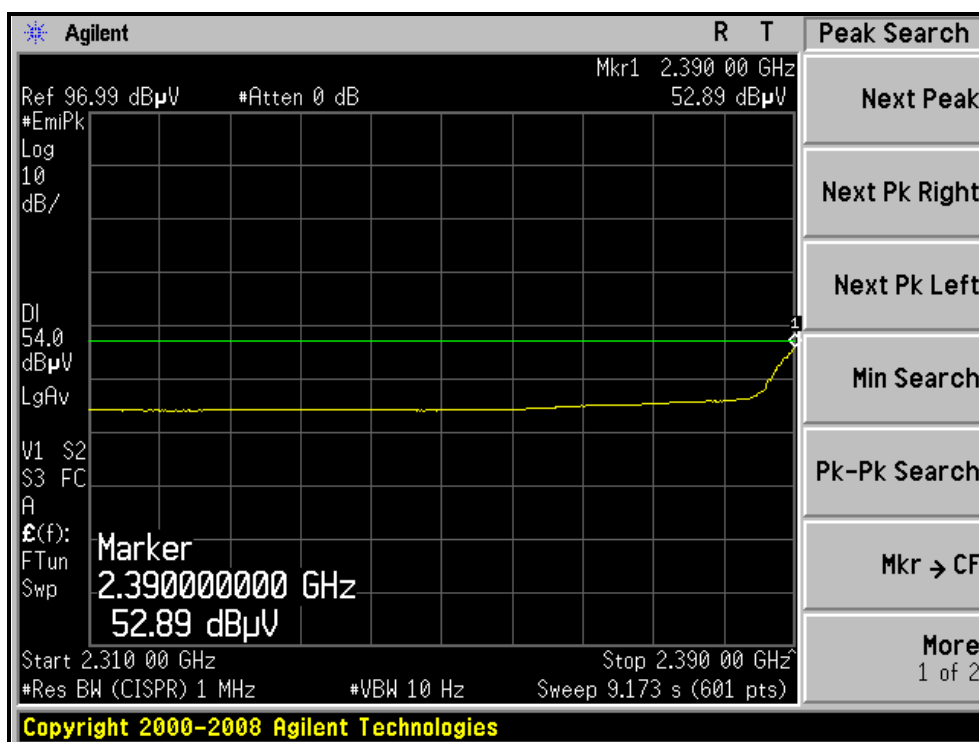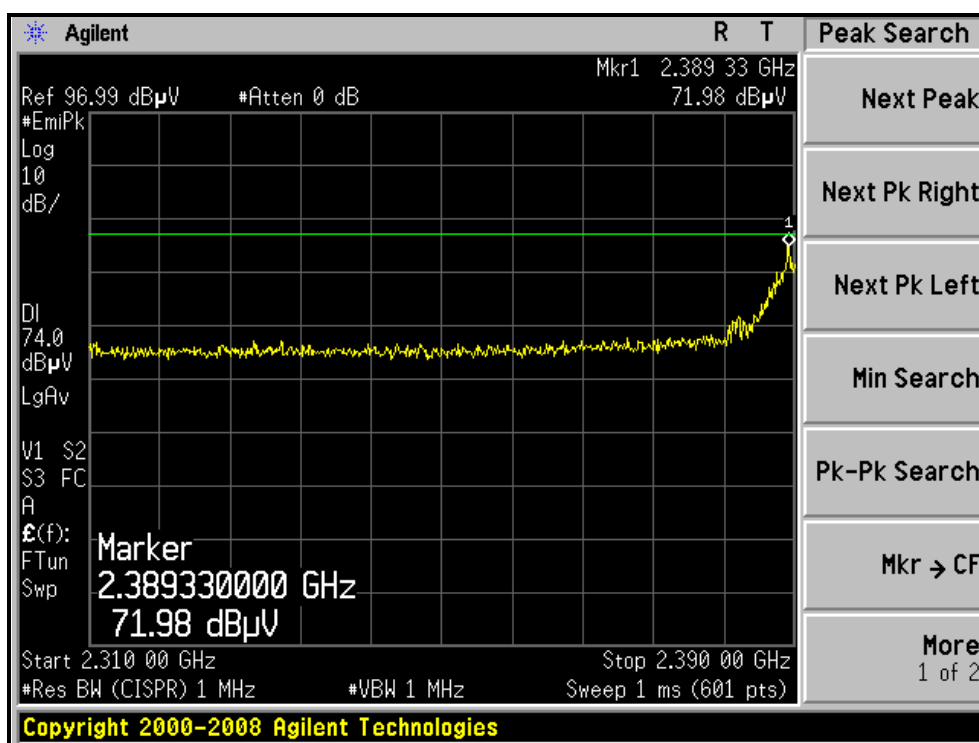

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, HORIZONTAL)

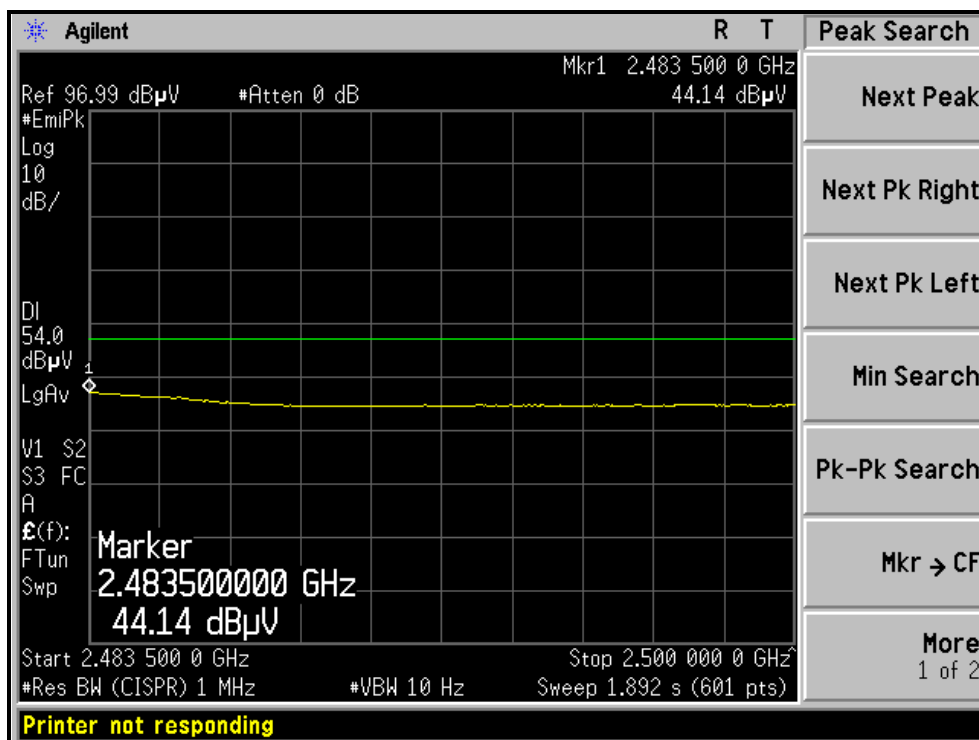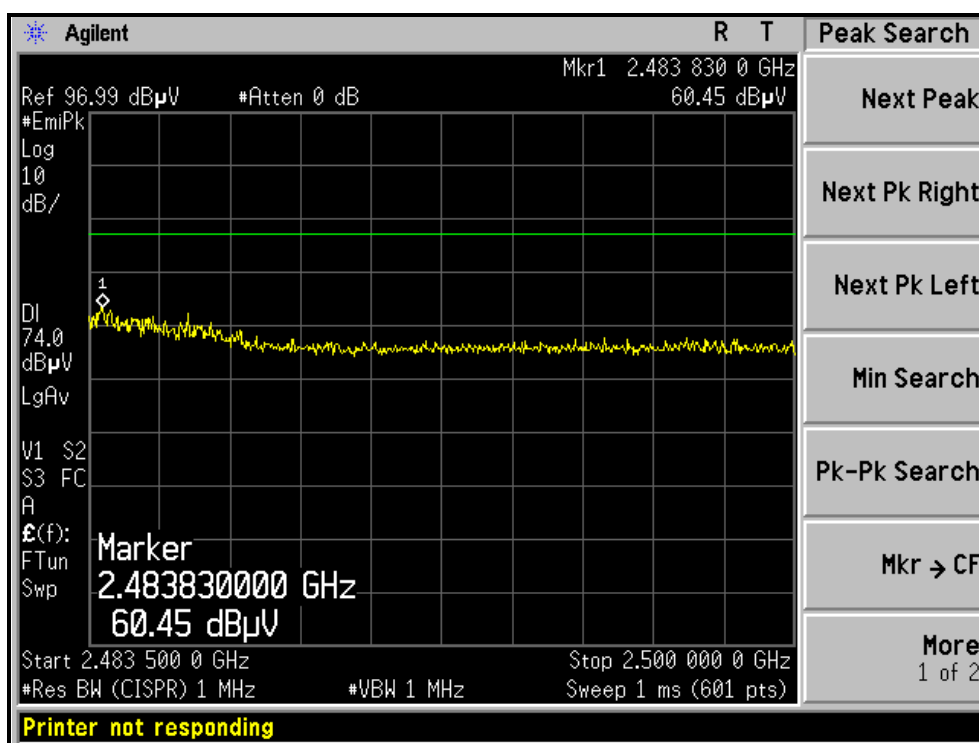

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, VERTICAL)

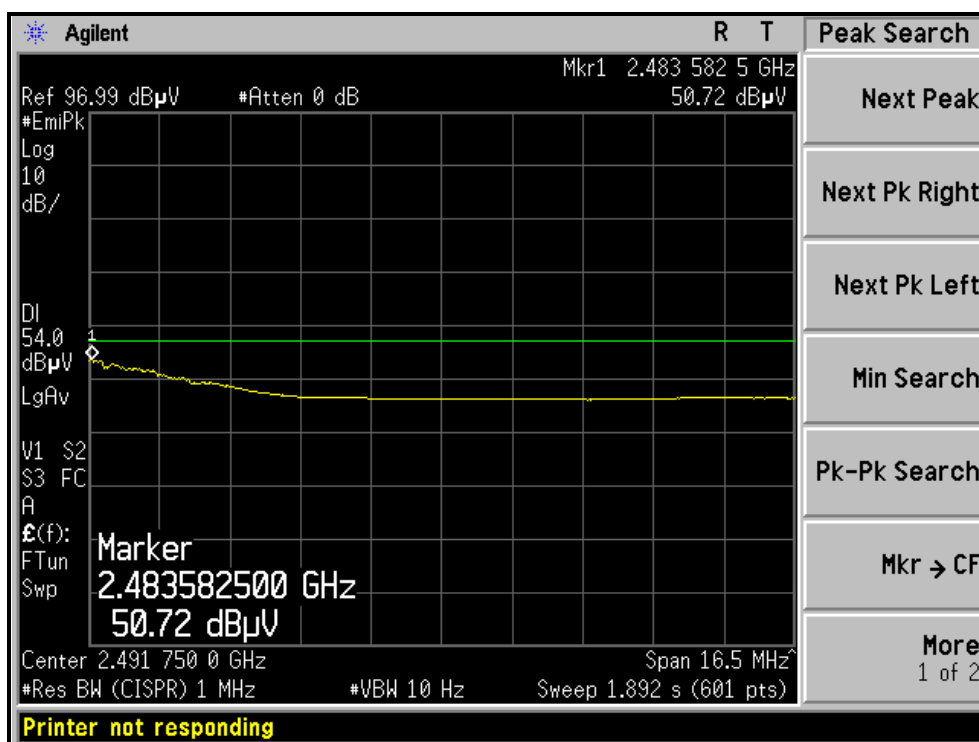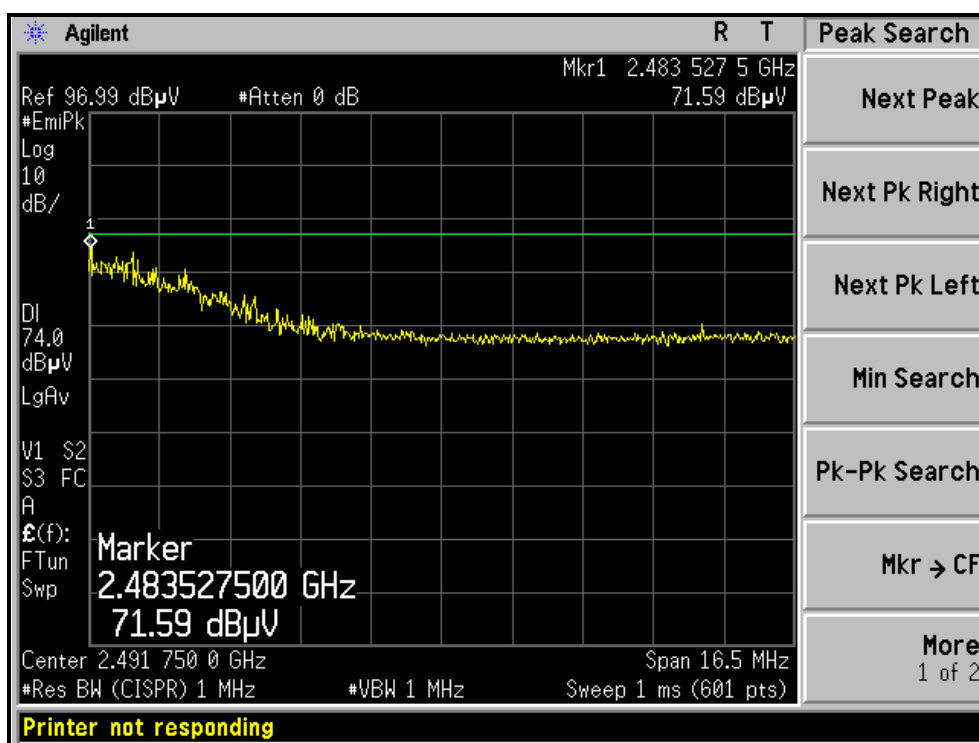



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2388.00	65.42 PK	74.00	-8.58	1.12 H	159	35.14	30.28
2	2388.00	45.98 AV	54.00	-8.02	1.12 H	159	15.70	30.28
3	*2422.00	93.96 PK			4.00 H	0	63.56	30.40
4	*2422.00	80.75 AV			4.00 H	0	50.35	30.40
5	4844.00	44.40 PK	74.00	-29.60	1.46 H	148	7.56	36.84
6	4844.00	31.40 AV	54.00	-22.60	1.46 H	148	-5.44	36.84
7	7266.00	49.70 PK	74.00	-24.30	1.11 H	212	6.56	43.14
8	7266.00	37.80 AV	54.00	-16.20	1.11 H	212	-5.34	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.38 PK	74.00	-2.62	1.45 V	105	41.10	30.28
2	2390.00	52.44 AV	54.00	-1.56	1.45 V	105	22.16	30.28
3	*2422.00	102.00 PK			1.45 V	104	71.60	30.40
4	*2422.00	90.96 AV			1.45 V	104	60.56	30.40
5	4844.00	44.80 PK	74.00	-29.20	1.32 V	106	7.96	36.84
6	4844.00	32.70 AV	54.00	-21.30	1.32 V	106	-4.14	36.84
7	7266.00	49.60 PK	74.00	-24.40	1.31 V	112	6.46	43.14
8	7266.00	37.90 AV	54.00	-16.10	1.31 V	112	-5.24	43.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	96.46 PK			1.35 H	160	66.00	30.46
2	*2437.00	84.26 AV			1.35 H	160	53.80	30.46
3	4874.00	44.20 PK	74.00	-29.80	1.42 H	124	7.28	36.92
4	4874.00	31.40 AV	54.00	-22.60	1.42 H	124	-5.52	36.92
5	7311.00	49.80 PK	74.00	-24.20	1.08 H	303	6.66	43.14
6	7311.00	37.70 AV	54.00	-16.30	1.08 H	303	-5.44	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.04 PK	74.00	-2.96	1.42 V	107	40.76	30.28
2	2390.00	51.83 AV	54.00	-2.17	1.42 V	107	21.55	30.28
3	*2437.00	108.63 PK			1.37 V	96	78.17	30.46
4	*2437.00	96.57 AV			1.37 V	96	66.11	30.46
5	2483.50	73.37 PK	74.00	-0.63	1.39 V	47	42.74	30.63
6	2483.50	53.42 AV	54.00	-0.58	1.39 V	47	22.79	30.63
7	4874.00	56.70 PK	74.00	-17.30	1.32 V	107	19.78	36.92
8	4874.00	33.50 AV	54.00	-20.50	1.32 V	107	-3.42	36.92
9	7311.00	50.10 PK	74.00	-23.90	1.34 V	114	6.96	43.14
10	7311.00	38.00 AV	54.00	-16.00	1.34 V	114	-5.14	43.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	90.89 PK			1.32 H	162	60.38	30.51
2	*2452.00	78.13 AV			1.32 H	162	47.62	30.51
3	2483.50	62.68 PK	74.00	-11.32	1.32 H	162	32.05	30.63
4	2483.50	44.72 AV	54.00	-9.28	1.32 H	162	14.09	30.63
5	4904.00	44.30 PK	74.00	-29.70	1.43 H	122	7.30	37.00
6	4904.00	31.90 AV	54.00	-22.10	1.43 H	122	-5.10	37.00
7	7356.00	49.90 PK	74.00	-24.10	1.06 H	314	6.77	43.13
8	7356.00	34.80 AV	54.00	-19.20	1.06 H	314	-8.33	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.50 PK			1.19 V	97	72.99	30.51
2	*2452.00	91.38 AV			1.19 V	97	60.87	30.51
3	2483.50	72.68 PK	74.00	-1.32	1.39 V	99	42.05	30.63
4	2483.50	53.13 AV	54.00	-0.87	1.39 V	99	22.50	30.63
5	4904.00	44.70 PK	74.00	-29.30	1.32 V	109	7.70	37.00
6	4904.00	32.40 AV	54.00	-21.60	1.32 V	109	-4.60	37.00
7	7356.00	49.80 PK	74.00	-24.20	1.33 V	103	6.67	43.13
8	7356.00	37.70 AV	54.00	-16.30	1.33 V	103	-5.43	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH1, HORIZONTAL)

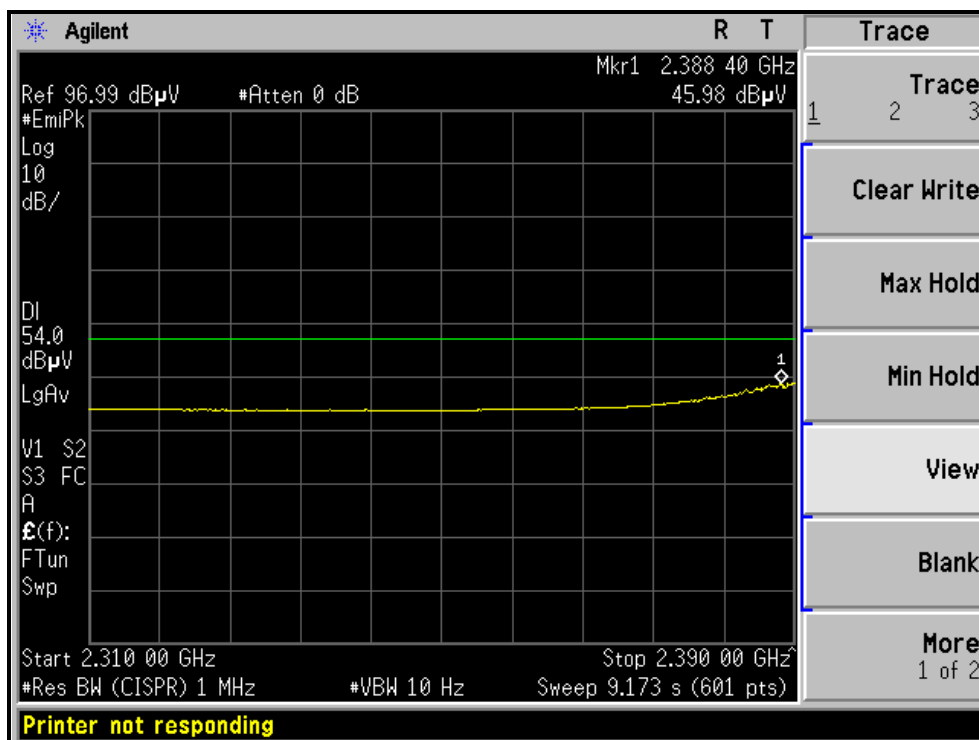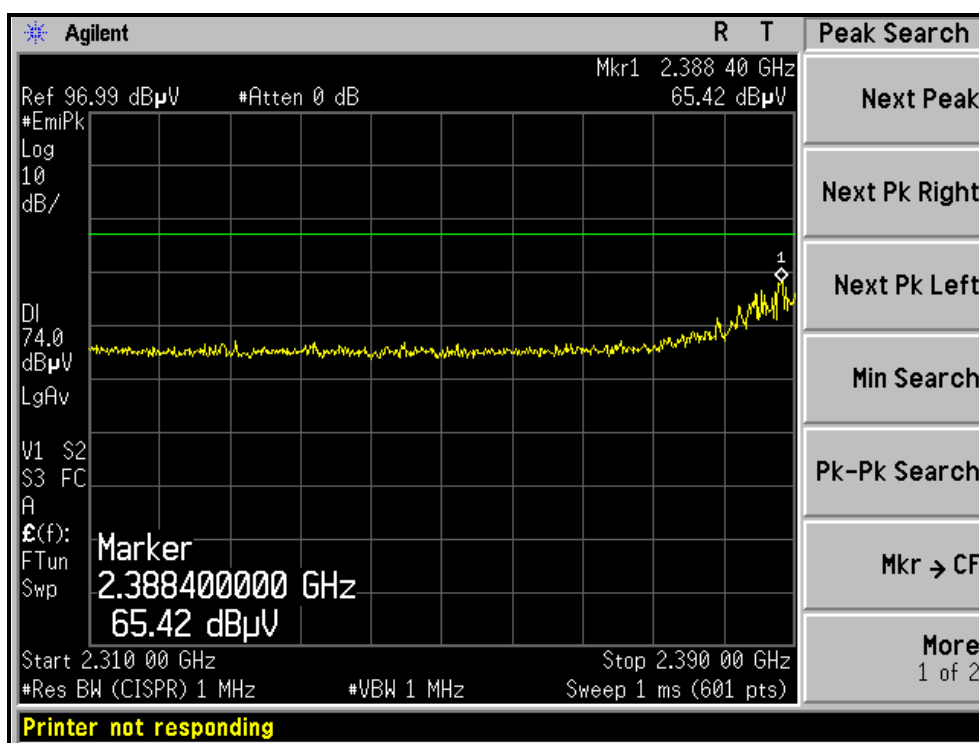



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH1, VERTICAL)

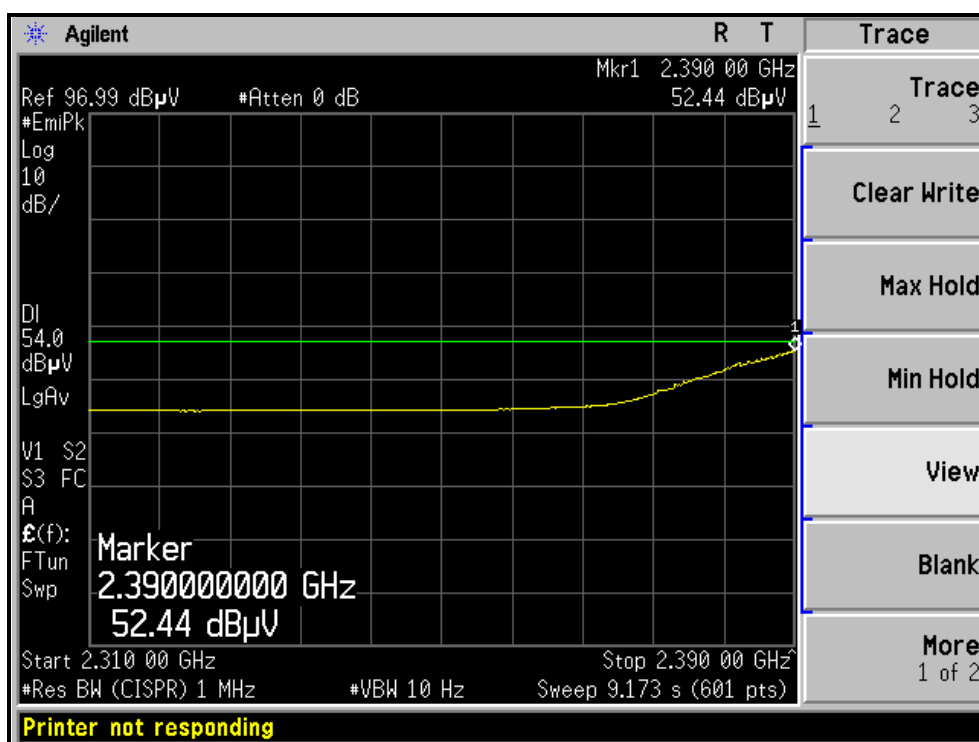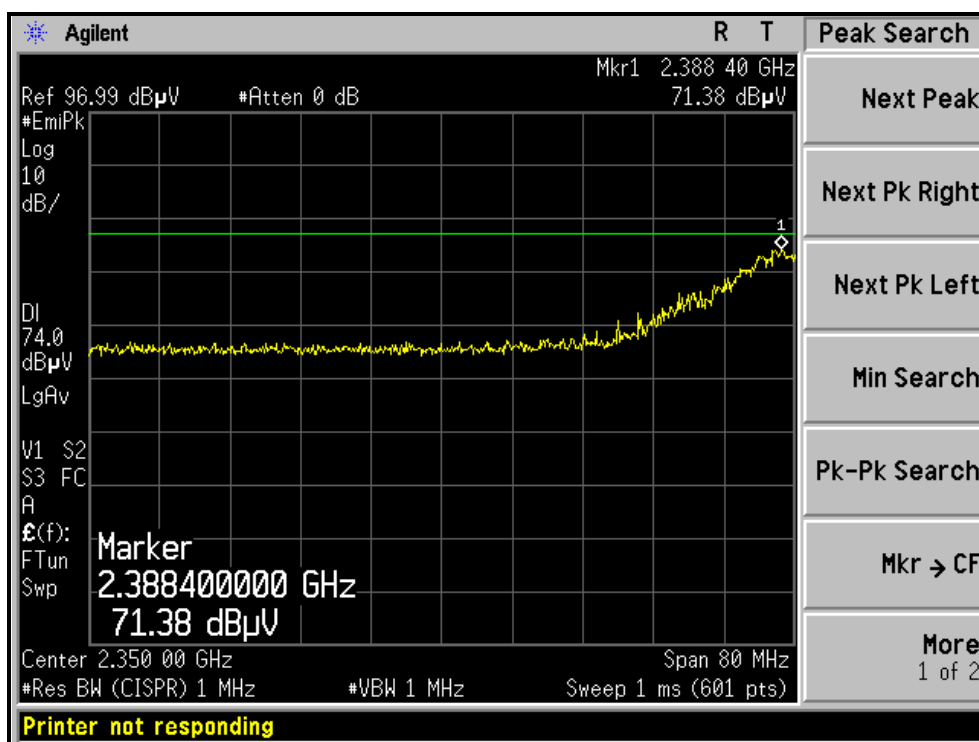

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, HORIZONTAL)

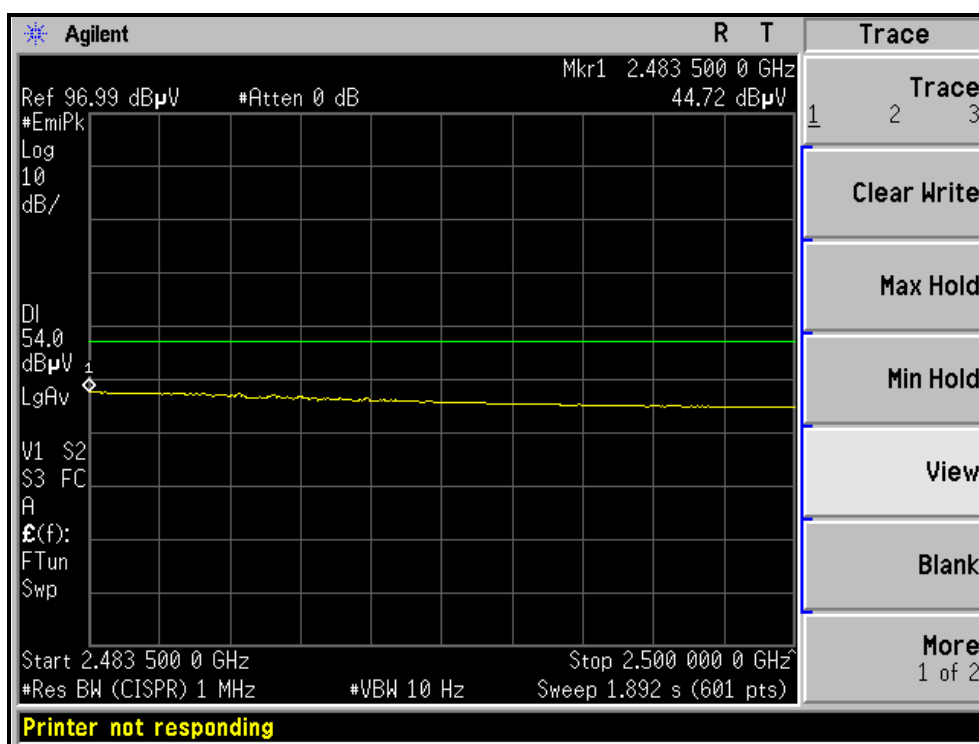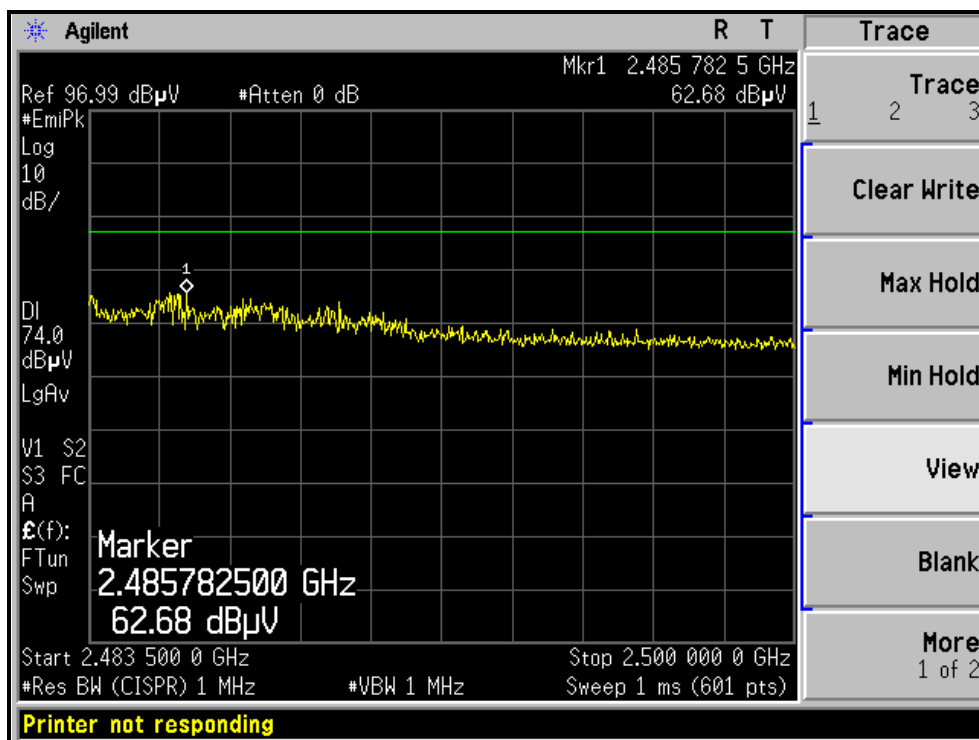

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, VERTICAL)

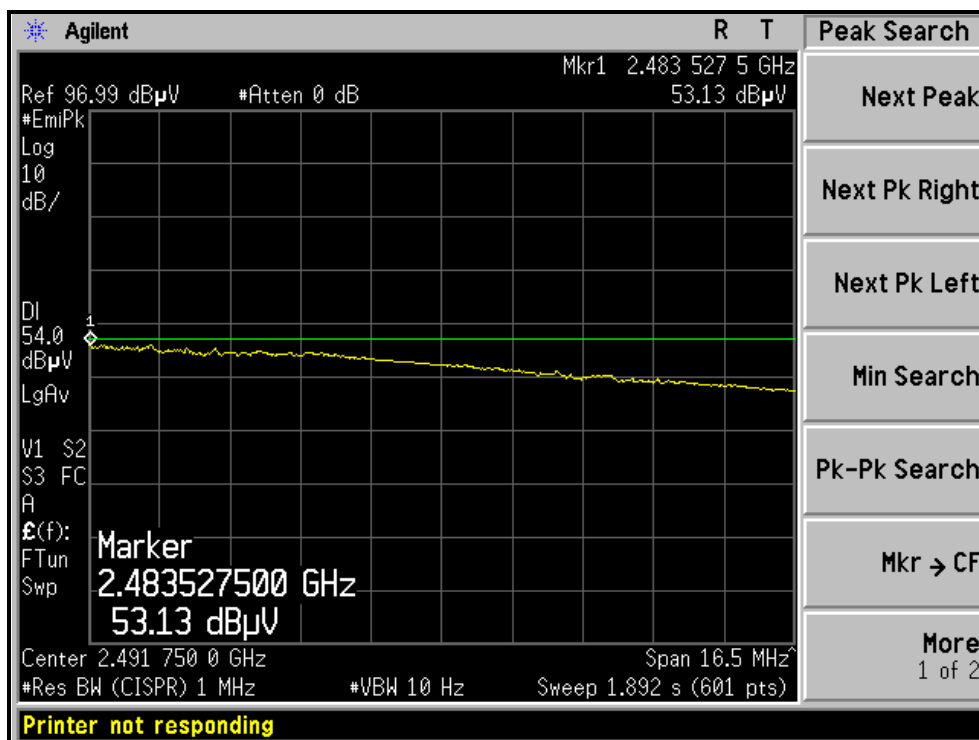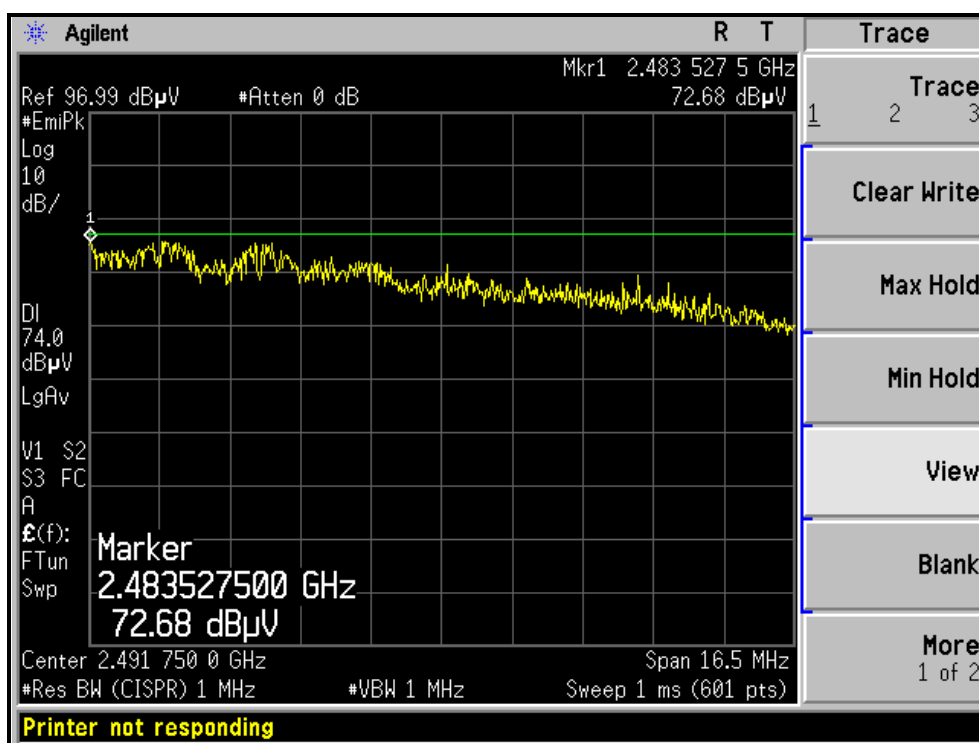



A D T

4.2.8 TEST RESULTS –PIFA ANTENNA

BELOW 1GHz WORST-CASE DATA : 802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	28.0deg. C, 57.0%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	150.52	26.53 QP	43.50	-16.97	1.26 H	120	10.74	15.79
2	199.70	34.48 QP	43.50	-9.02	1.26 H	332	22.07	12.41
3	208.80	30.32 QP	43.50	-13.18	1.26 H	51	17.60	12.72
4	322.80	26.22 QP	46.00	-19.78	1.26 H	163	8.83	17.39
5	399.65	32.41 QP	46.00	-13.59	1.00 H	191	12.92	19.49
6	663.25	32.00 QP	46.00	-14.00	1.26 H	0	6.34	25.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	150.36	28.09 QP	43.50	-15.41	1.00 V	302	12.29	15.80
2	199.84	30.47 QP	43.50	-13.03	1.00 V	192	18.07	12.40
3	299.68	34.80 QP	46.00	-11.20	1.00 V	54	18.04	16.76
4	381.60	34.92 QP	46.00	-11.08	1.00 V	204	15.93	18.99
5	400.21	32.25 QP	46.00	-13.75	1.00 V	167	12.74	19.51
6	499.60	37.47 QP	46.00	-8.53	1.00 V	348	14.99	22.48

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.20	54.66 PK	74.00	-19.34	1.55 H	6	24.38	30.28
2	2389.20	43.08 AV	54.00	-10.92	1.55 H	6	12.80	30.28
3	*2412.00	106.92 PK			1.54 H	1	76.56	30.36
4	*2412.00	104.89 AV			1.54 H	1	74.53	30.36
5	4824.00	50.31 PK	74.00	-23.69	1.32 H	212	13.52	36.79
6	4824.00	45.08 AV	54.00	-8.92	1.32 H	212	8.29	36.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.00	54.63 PK	74.00	-19.37	2.09 V	259	24.35	30.28
2	2389.00	42.06 AV	54.00	-11.94	2.09 V	259	11.78	30.28
3	*2412.00	99.80 PK			2.09 V	0	69.44	30.36
4	*2412.00	97.33 AV			2.09 V	0	66.97	30.36
5	4824.00	54.48 PK	74.00	-19.52	1.38 V	86	17.69	36.79
6	4824.00	49.35 AV	54.00	-4.65	1.38 V	86	12.56	36.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.73 PK			1.25 H	105	77.27	30.46
2	*2437.00	105.35 AV			1.25 H	105	74.89	30.46
3	4874.00	54.18 PK	74.00	-19.82	1.57 H	271	17.26	36.92
4	4874.00	51.33 AV	54.00	-2.67	1.57 H	271	14.41	36.92
5	7311.00	50.96 PK	74.00	-23.04	1.44 H	255	7.82	43.14
6	7311.00	38.68 AV	54.00	-15.32	1.44 H	255	-4.46	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.96 PK			1.68 V	0	71.50	30.46
2	*2437.00	99.12 AV			1.68 V	0	68.66	30.46
3	4874.00	55.33 PK	74.00	-18.67	1.41 V	251	18.41	36.92
4	4874.00	52.05 AV	54.00	-1.95	1.41 V	251	15.13	36.92
5	7311.00	50.92 PK	74.00	-23.08	1.28 V	37	7.78	43.14
6	7311.00	38.54 AV	54.00	-15.46	1.28 V	37	-4.60	43.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.42 PK			1.51 H	0	78.87	30.55
2	*2462.00	106.91 AV			1.51 H	0	76.36	30.55
3	2483.50	56.00 PK	74.00	-18.00	1.52 H	0	25.37	30.63
4	2483.50	43.62 AV	54.00	-10.38	1.52 H	0	12.99	30.63
5	4924.00	54.06 PK	74.00	-19.94	1.39 H	231	17.00	37.06
6	4924.00	51.31 AV	54.00	-2.69	1.39 H	231	14.25	37.06
7	7386.00	50.98 PK	74.00	-23.02	1.47 H	263	7.85	43.13
8	7386.00	38.74 AV	54.00	-15.26	1.47 H	263	-4.39	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.31 PK			1.67 V	17	70.76	30.55
2	*2462.00	98.82 AV			1.67 V	17	68.27	30.55
3	2483.50	54.30 PK	74.00	-19.70	1.67 V	17	23.67	30.63
4	2483.50	42.02 AV	54.00	-11.98	1.67 V	17	11.39	30.63
5	4924.00	55.29 PK	74.00	-18.71	1.37 V	268	18.23	37.06
6	4924.00	52.98 AV	54.00	-1.02	1.37 V	268	15.92	37.06
7	7386.00	51.03 PK	74.00	-22.97	1.27 V	29	7.90	43.13
8	7386.00	39.58 AV	54.00	-14.42	1.27 V	29	-3.55	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11b MODE,CH1, HORIZONTAL)

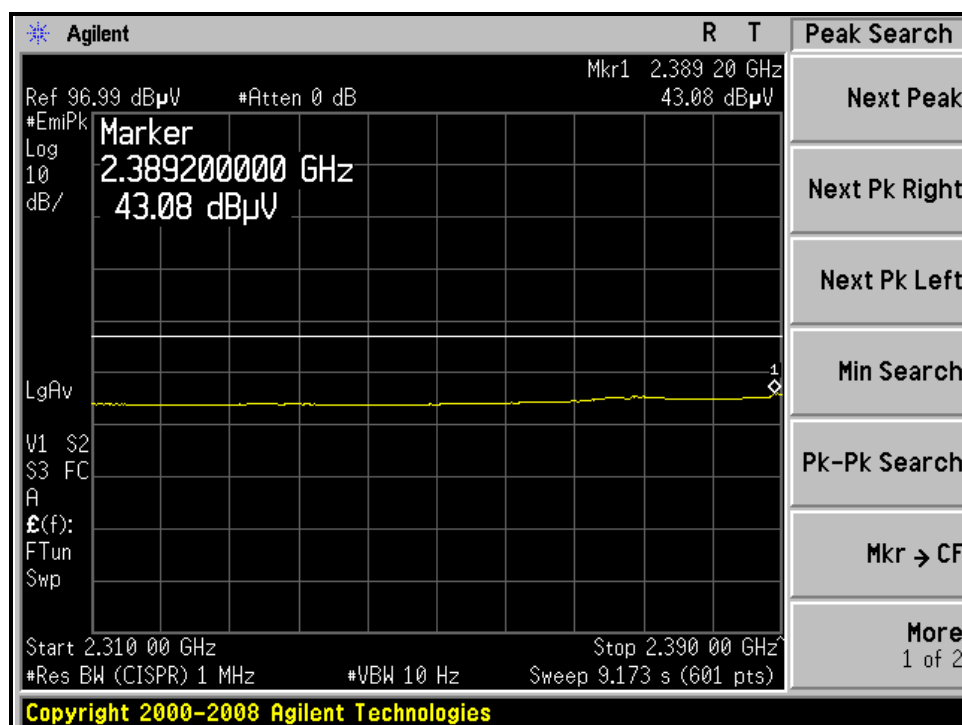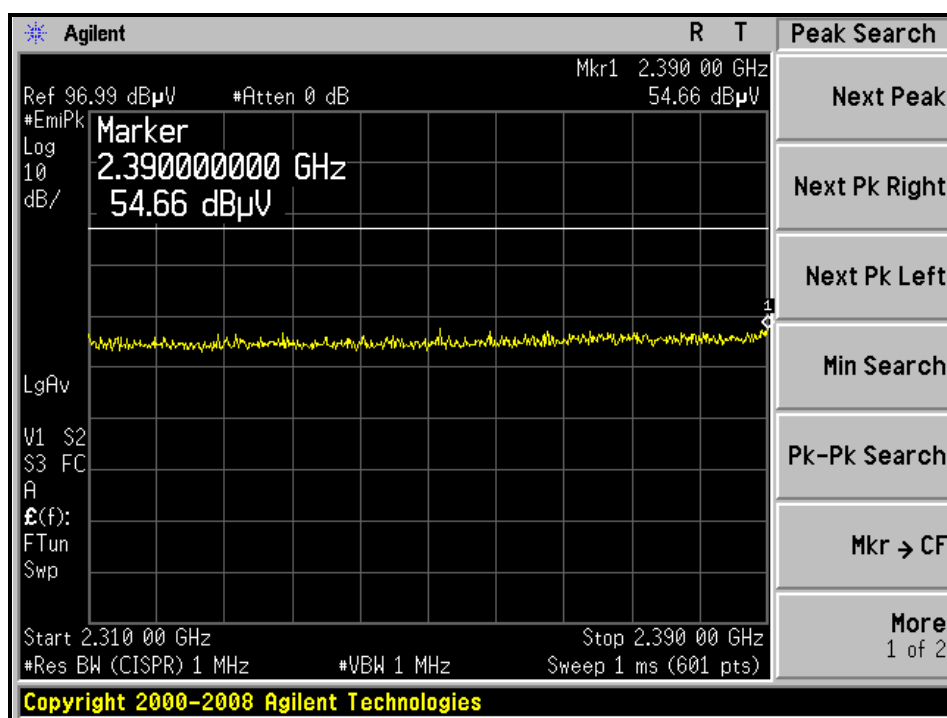

RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

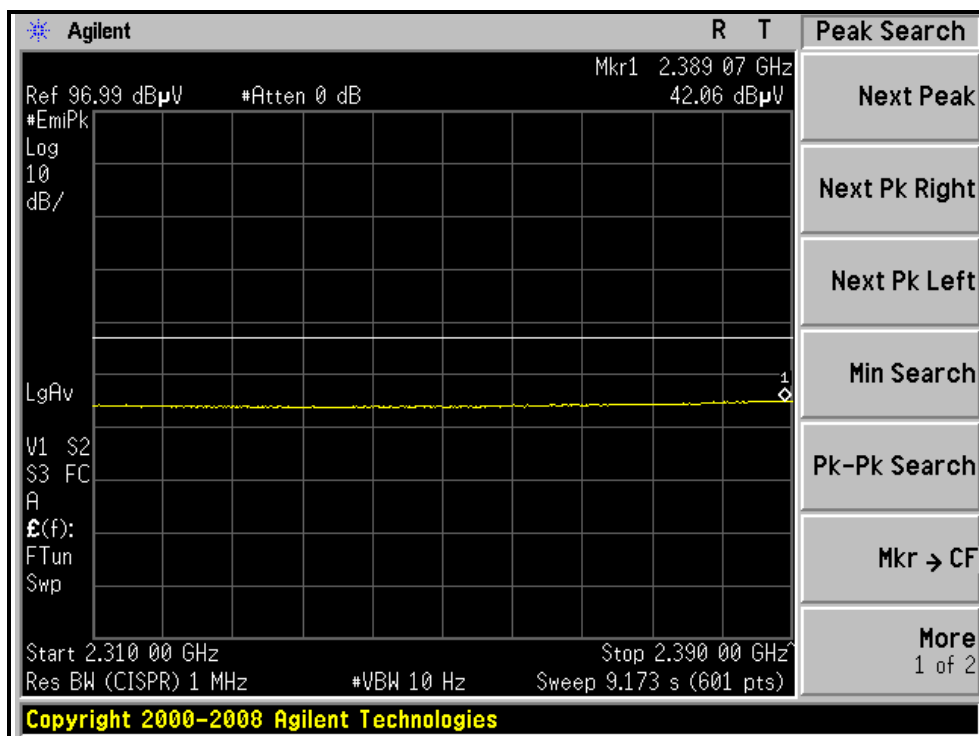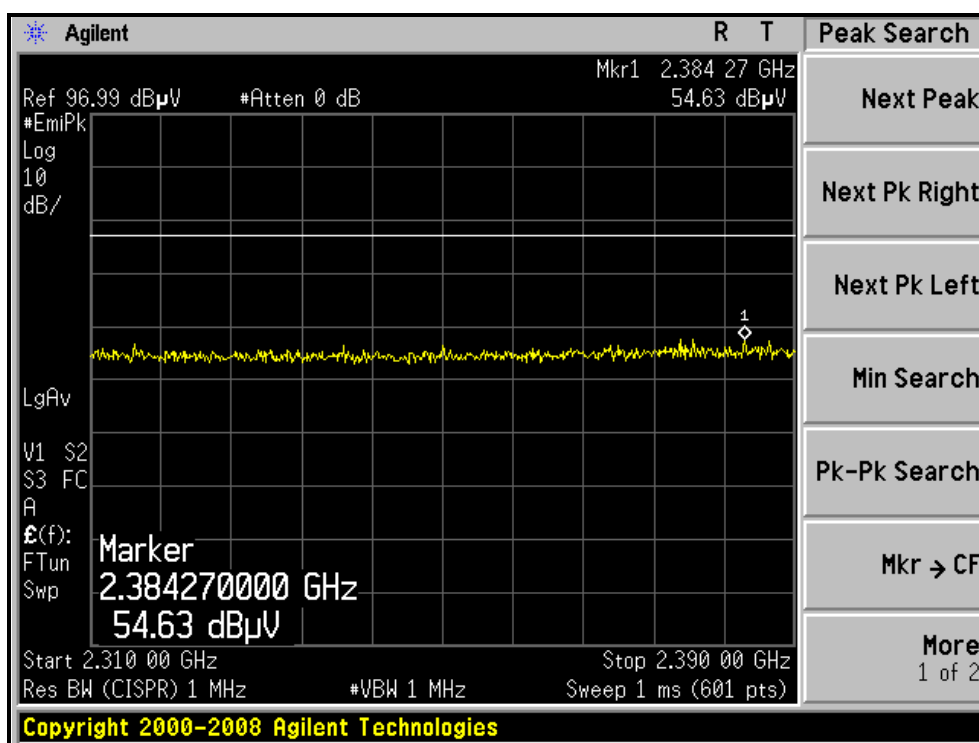



RESTRICTED BANDEDGE (802.11b MODE,CH11, HORIZONTAL)

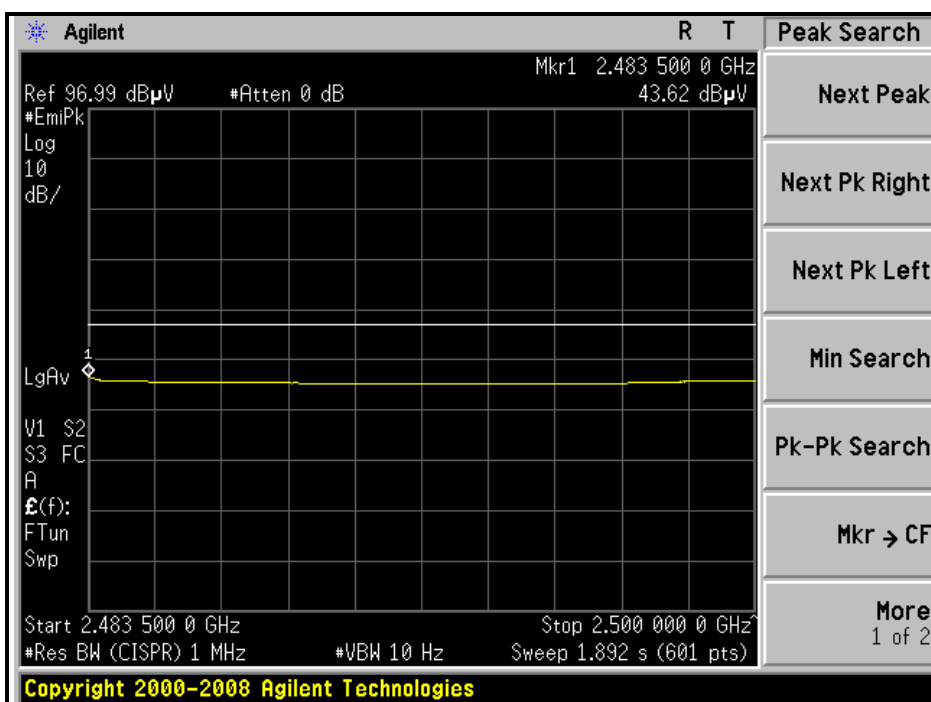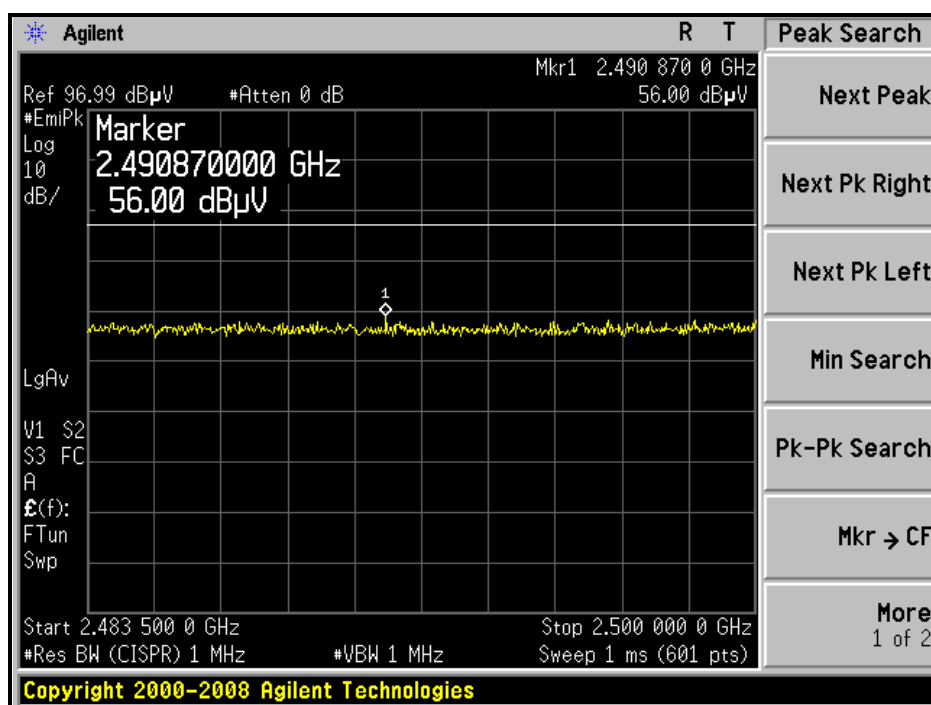



A D T

RESTRICTED BANDEDGE (802.11b MODE,CH11, VERTICAL)

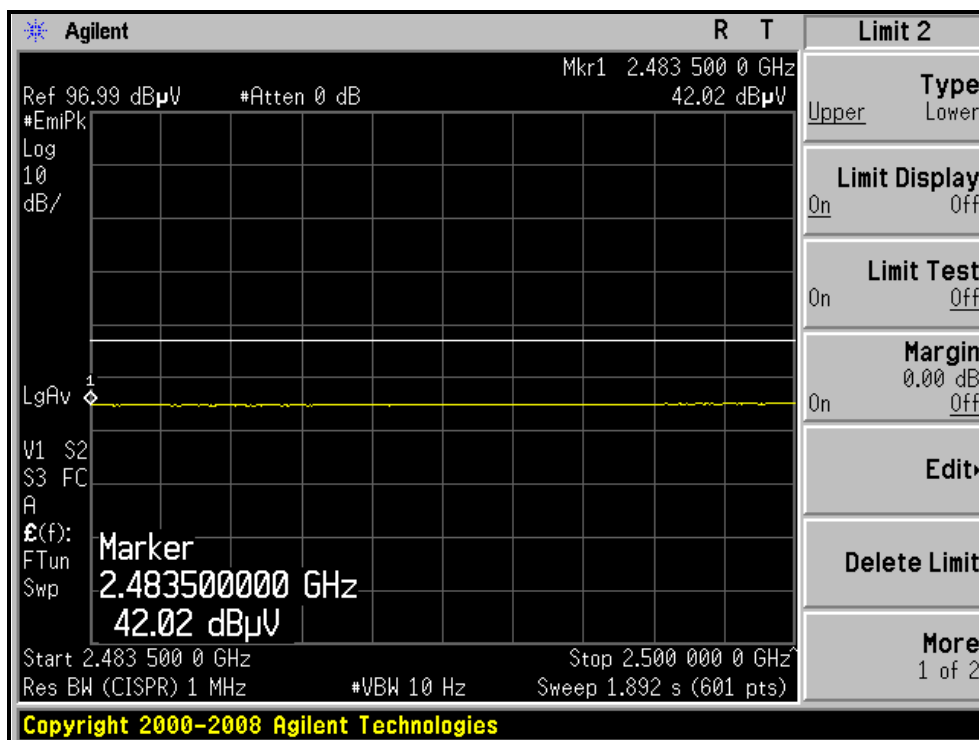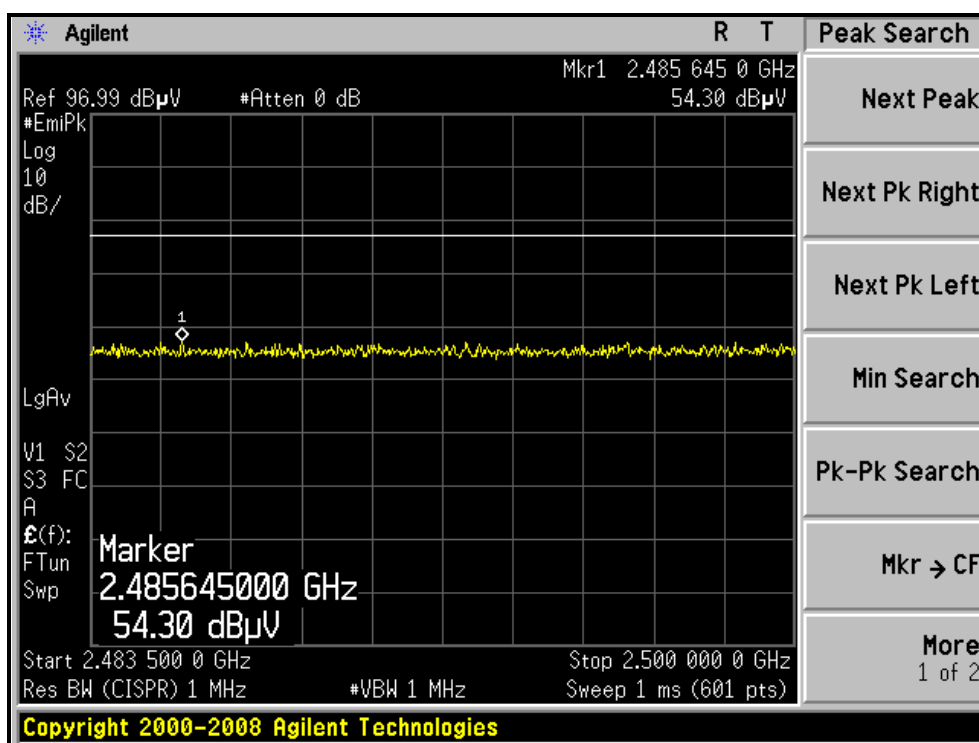



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.87	70.84 PK	74.00	-3.16	1.55 H	5	40.56	30.28
2	2389.87	51.69 AV	54.00	-2.31	1.55 H	5	21.41	30.28
3	*2412.00	107.82 PK			1.55 H	0	77.46	30.36
4	*2412.00	96.45 AV			1.55 H	0	66.09	30.36
5	4824.00	47.25 PK	74.00	-26.75	1.47 H	213	10.46	36.79
6	4824.00	34.01 AV	54.00	-19.99	1.47 H	213	-2.78	36.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.60 PK	74.00	-9.40	1.71 V	0	34.32	30.28
2	2390.00	46.92 AV	54.00	-7.08	1.71 V	0	16.64	30.28
3	*2412.00	100.29 PK			1.70 V	0	69.93	30.36
4	*2412.00	89.78 AV			1.70 V	0	59.42	30.36
5	4824.00	44.79 PK	74.00	-29.21	1.20 V	36	8.00	36.79
6	4824.00	33.13 AV	54.00	-20.87	1.20 V	36	-3.66	36.79

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.28 PK			1.56 H	43	80.82	30.46
2	*2437.00	100.17 AV			1.56 H	43	69.71	30.46
3	4874.00	55.59 PK	74.00	-18.41	1.39 H	208	18.67	36.92
4	4874.00	41.39 AV	54.00	-12.61	1.39 H	208	4.47	36.92
5	7311.00	50.78 PK	74.00	-23.22	1.44 H	263	7.64	43.14
6	7311.00	38.51 AV	54.00	-15.49	1.44 H	263	-4.63	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.45 PK			1.71 V	0	74.99	30.46
2	*2437.00	94.18 AV			1.71 V	0	63.72	30.46
3	4874.00	53.97 PK	74.00	-20.03	1.50 V	336	17.05	36.92
4	4874.00	40.57 AV	54.00	-13.43	1.50 V	336	3.65	36.92
5	7311.00	50.77 PK	74.00	-23.23	1.29 V	35	7.63	43.14
6	7311.00	38.42 AV	54.00	-15.58	1.29 V	35	-4.72	43.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.62 PK			1.51 H	0	79.07	30.55
2	*2462.00	98.26 AV			1.51 H	0	67.71	30.55
3	2483.70	72.89 PK	74.00	-1.11	1.51 H	0	42.26	30.63
4	2483.70	52.80 AV	54.00	-1.20	1.51 H	0	22.17	30.63
5	4924.00	47.27 PK	74.00	-26.73	1.34 H	209	10.21	37.06
6	4924.00	35.87 AV	54.00	-18.13	1.34 H	209	-1.19	37.06
7	7386.00	50.75 PK	74.00	-23.25	1.24 H	51	7.62	43.13
8	7386.00	38.65 AV	54.00	-15.35	1.24 H	51	-4.48	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.31 PK			1.66 V	0	70.76	30.55
2	*2462.00	90.28 AV			1.66 V	0	59.73	30.55
3	2483.50	65.72 PK	74.00	-8.28	1.66 V	0	35.09	30.63
4	2483.50	48.67 AV	54.00	-5.33	1.66 V	0	18.04	30.63
5	4924.00	47.55 PK	74.00	-26.45	1.51 V	360	10.49	37.06
6	4924.00	35.04 AV	54.00	-18.96	1.51 V	360	-2.02	37.06
7	7386.00	50.83 PK	74.00	-23.17	1.28 V	247	7.70	43.13
8	7386.00	38.52 AV	54.00	-15.48	1.28 V	247	-4.61	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

RESTRICTED BANDEDGE (802.11g MODE,CH1, HORIZONTAL)

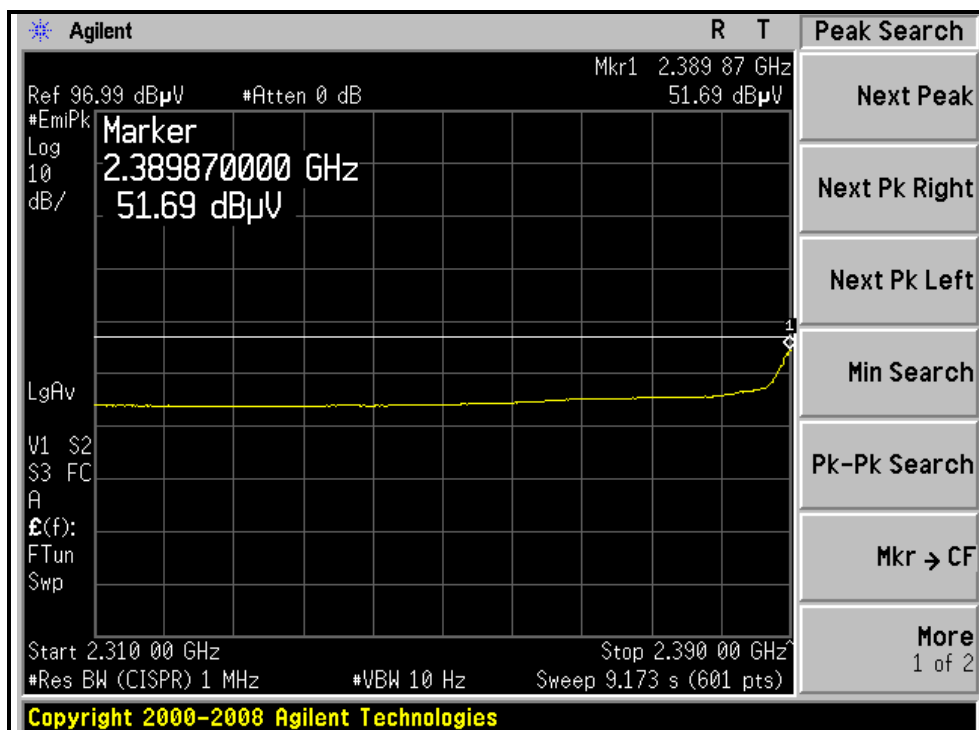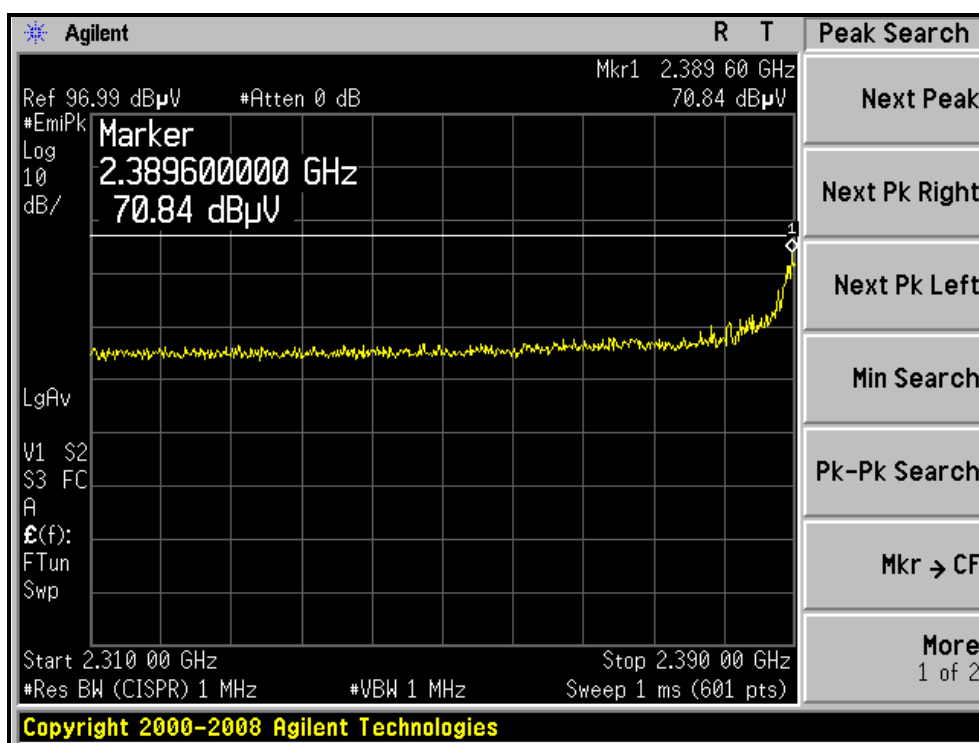



RESTRICTED BANDEDGE (802.11g MODE,CH1, VERTICAL)

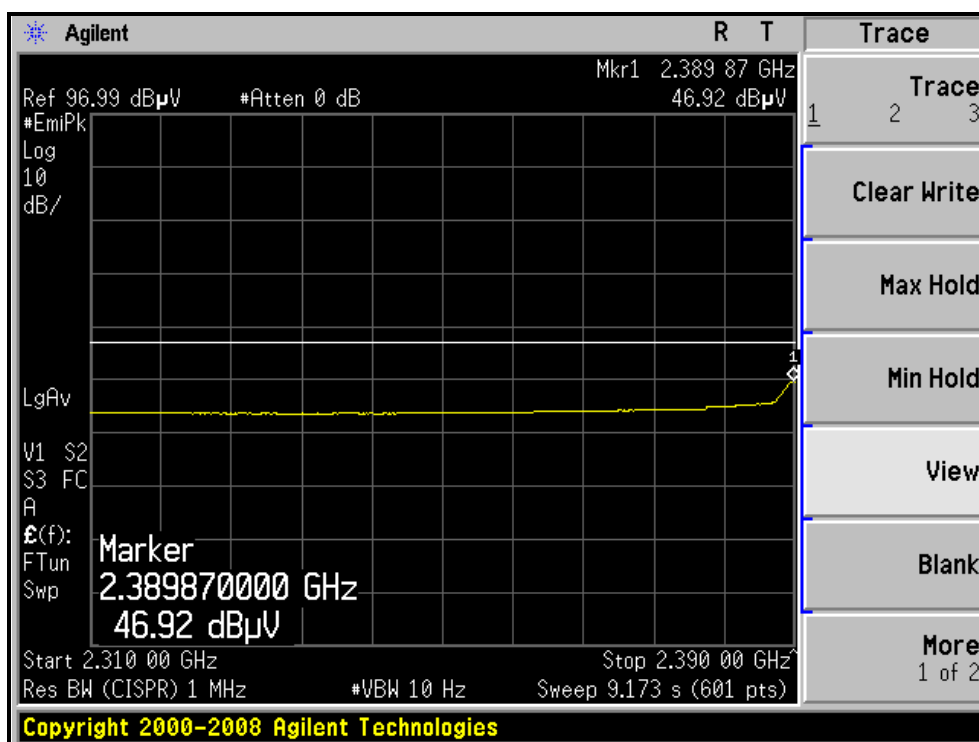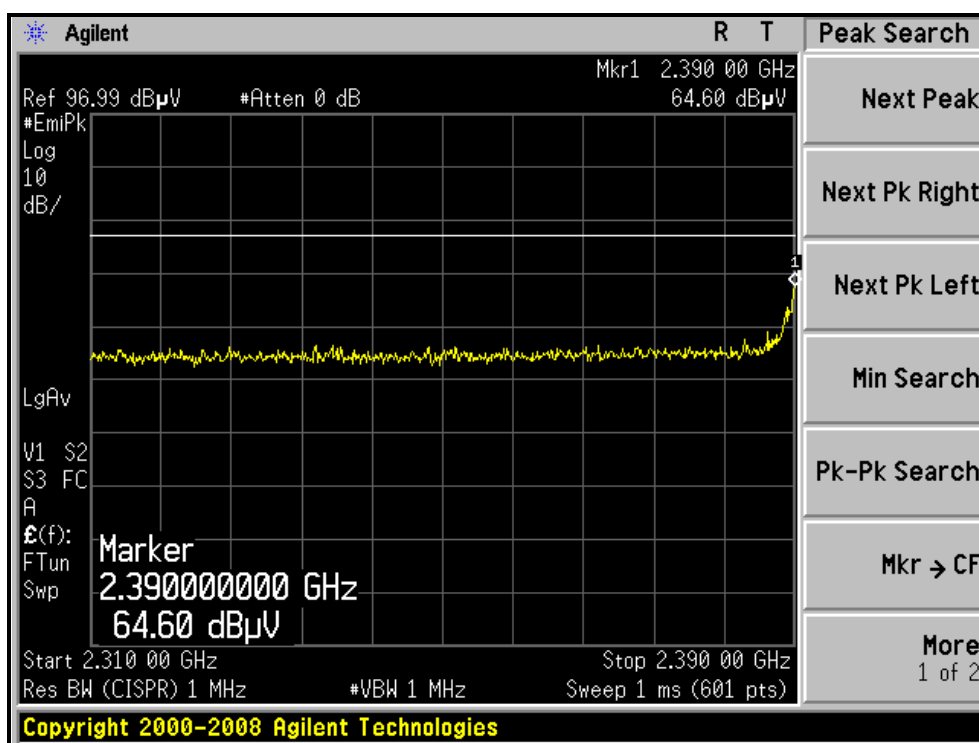



A D T



RESTRICTED BANDEDGE (802.11g MODE,CH11, HORIZONTAL)

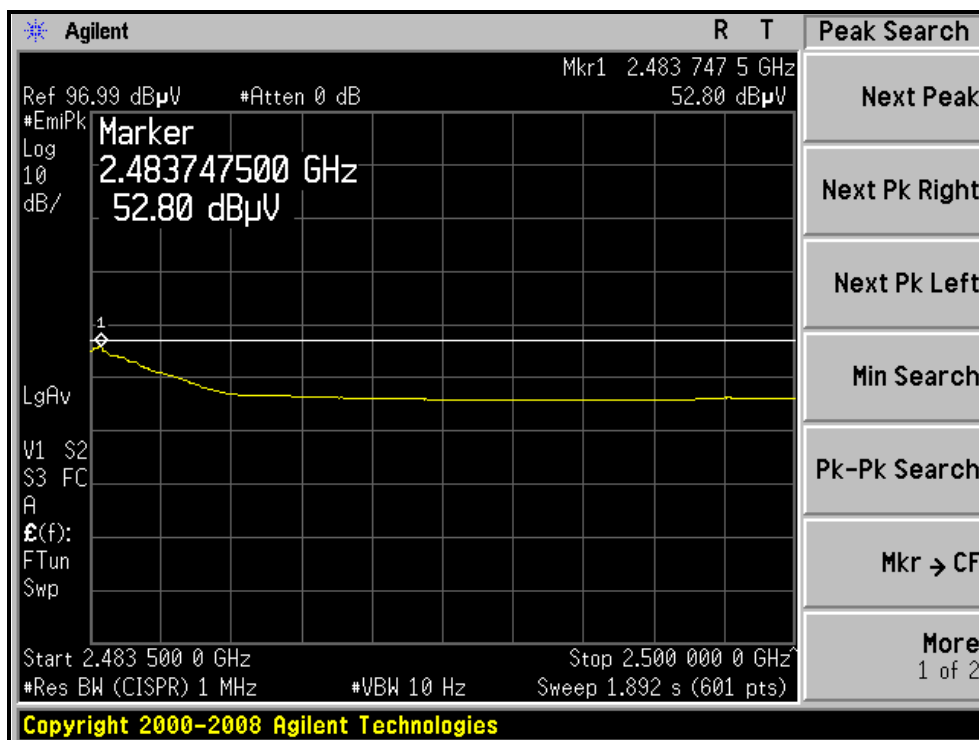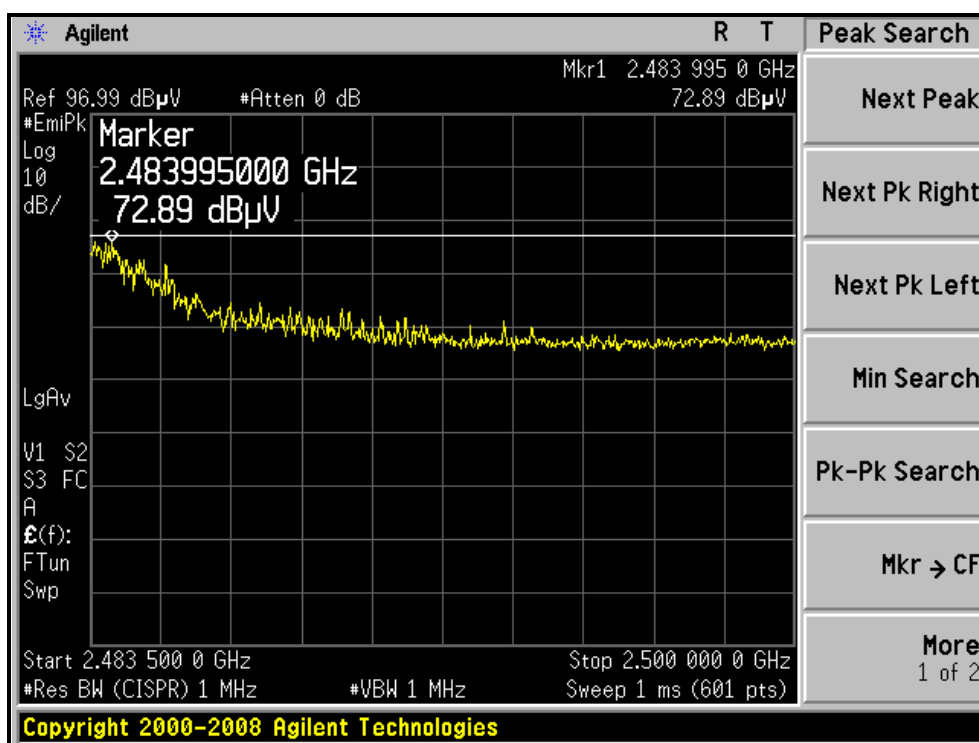



A D T

RESTRICTED BANDEDGE (802.11g MODE,CH11, VERTICAL)

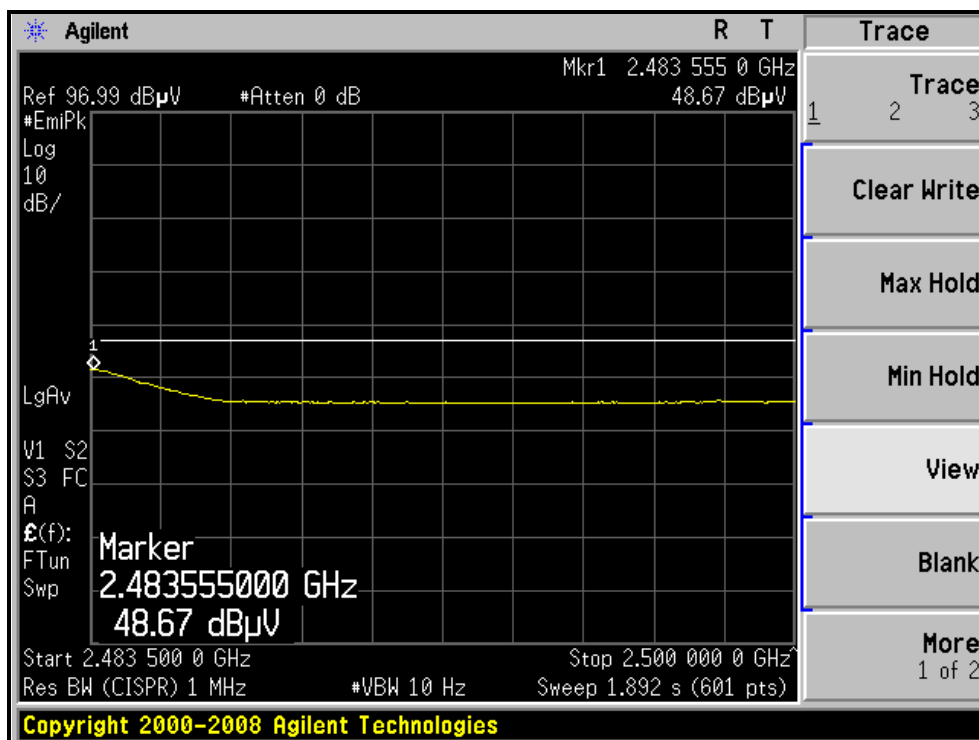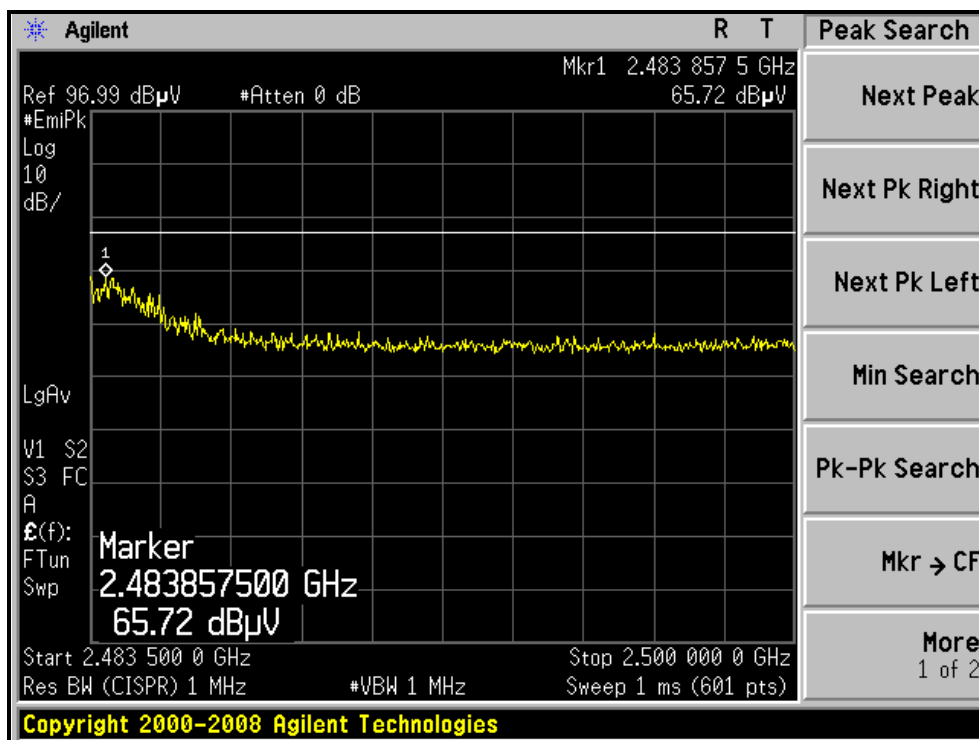



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.78 PK	74.00	-1.22	1.55 H	3	42.50	30.28
2	2390.00	53.37 AV	54.00	-0.63	1.55 H	3	23.09	30.28
3	*2412.00	107.83 PK			1.62 H	125	77.47	30.36
4	*2412.00	96.07 AV			1.62 H	125	65.71	30.36
5	4824.00	47.36 PK	74.00	-26.64	1.47 H	214	10.57	36.79
6	4824.00	34.15 AV	54.00	-19.85	1.47 H	214	-2.64	36.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.61 PK	74.00	-9.39	1.70 V	1	34.33	30.28
2	2390.00	47.55 AV	54.00	-6.45	1.70 V	1	17.27	30.28
3	*2412.00	99.31 PK			1.71 V	0	68.95	30.36
4	*2412.00	87.95 AV			1.71 V	0	57.59	30.36
5	4824.00	44.85 PK	74.00	-29.15	1.20 V	36	8.06	36.79
6	4824.00	33.26 AV	54.00	-20.74	1.20 V	36	-3.53	36.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.05 PK			1.55 H	92	80.59	30.46
2	*2437.00	99.92 AV			1.55 H	92	69.46	30.46
3	4874.00	53.51 PK	74.00	-20.49	1.01 H	204	16.59	36.92
4	4874.00	40.41 AV	54.00	-13.59	1.01 H	204	3.49	36.92
5	7311.00	50.81 PK	74.00	-23.19	1.47 H	264	7.67	43.14
6	7311.00	38.77 AV	54.00	-15.23	1.47 H	264	-4.37	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.37 PK			1.71 V	14	74.91	30.46
2	*2437.00	93.91 AV			1.71 V	14	63.45	30.46
3	4874.00	52.63 PK	74.00	-21.37	1.50 V	336	15.71	36.92
4	4874.00	40.08 AV	54.00	-13.92	1.50 V	336	3.16	36.92
5	7311.00	50.78 PK	74.00	-23.22	1.27 V	31	7.64	43.14
6	7311.00	38.65 AV	54.00	-15.35	1.27 V	31	-4.49	43.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.33 PK			1.50 H	359	77.78	30.55
2	*2462.00	96.95 AV			1.50 H	359	66.40	30.55
3	2483.50	73.05 PK	74.00	-0.95	1.52 H	355	42.42	30.63
4	2483.50	52.94 AV	54.00	-1.06	1.52 H	355	22.31	30.63
5	4924.00	46.73 PK	74.00	-27.27	1.32 H	247	9.67	37.06
6	4924.00	34.14 AV	54.00	-19.86	1.32 H	247	-2.92	37.06
7	7386.00	50.92 PK	74.00	-23.08	1.47 H	266	7.79	43.13
8	7386.00	38.78 AV	54.00	-15.22	1.47 H	266	-4.35	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.24 PK			1.68 V	13	69.69	30.55
2	*2462.00	88.13 AV			1.68 V	13	57.58	30.55
3	2483.50	66.23 PK	74.00	-7.77	1.67 V	13	35.60	30.63
4	2483.50	46.75 AV	54.00	-7.25	1.67 V	13	16.12	30.63
5	4924.00	45.50 PK	74.00	-28.50	1.51 V	336	8.44	37.06
6	4924.00	33.80 AV	54.00	-20.20	1.51 V	336	-3.26	37.06
7	7386.00	50.47 PK	74.00	-23.53	1.27 V	35	7.34	43.13
8	7386.00	38.77 AV	54.00	-15.23	1.27 V	35	-4.36	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, HORIZONTAL)

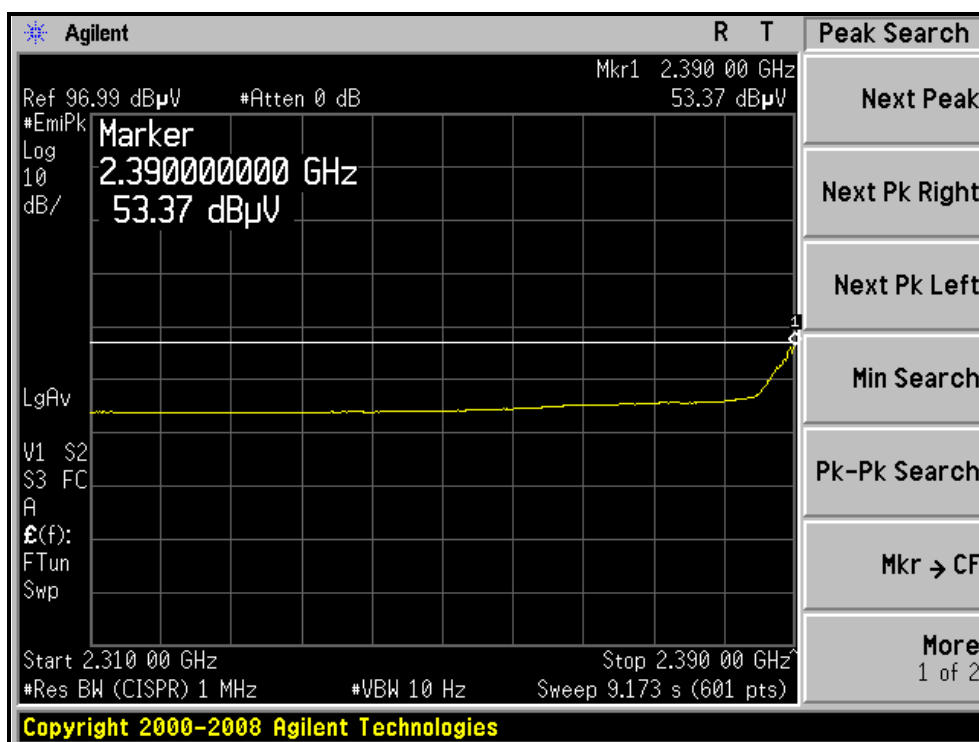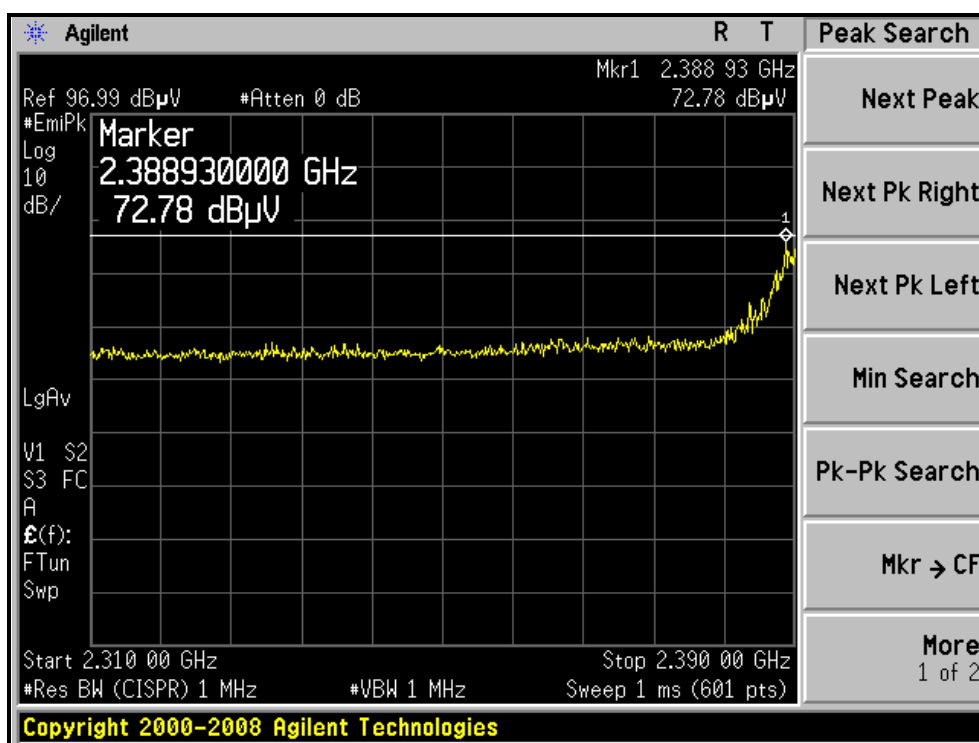



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, VERTICAL)

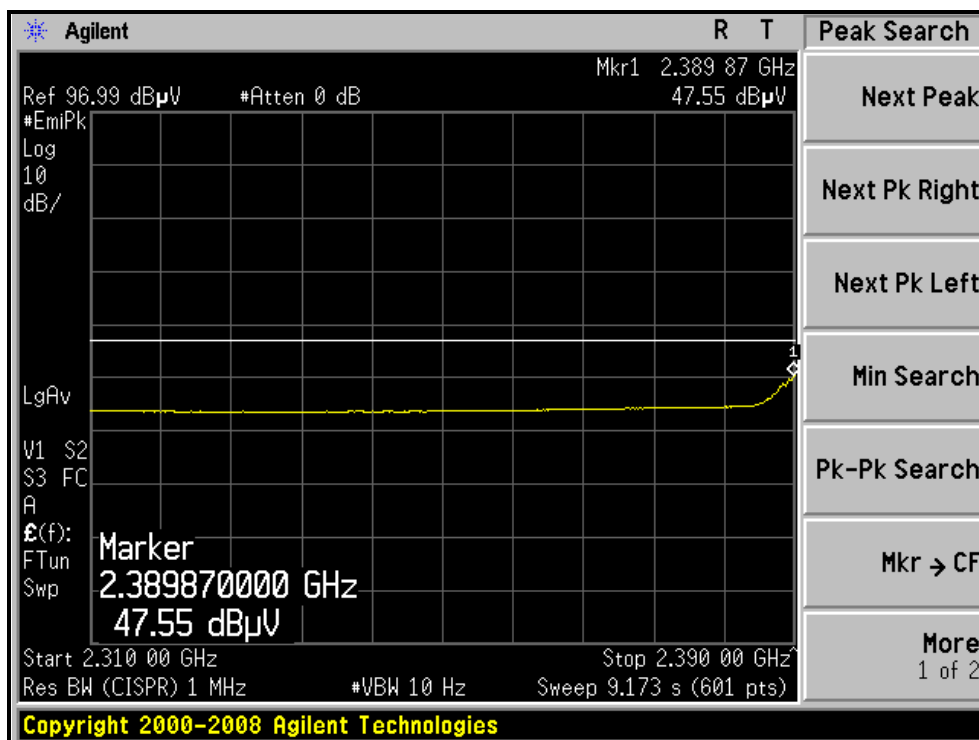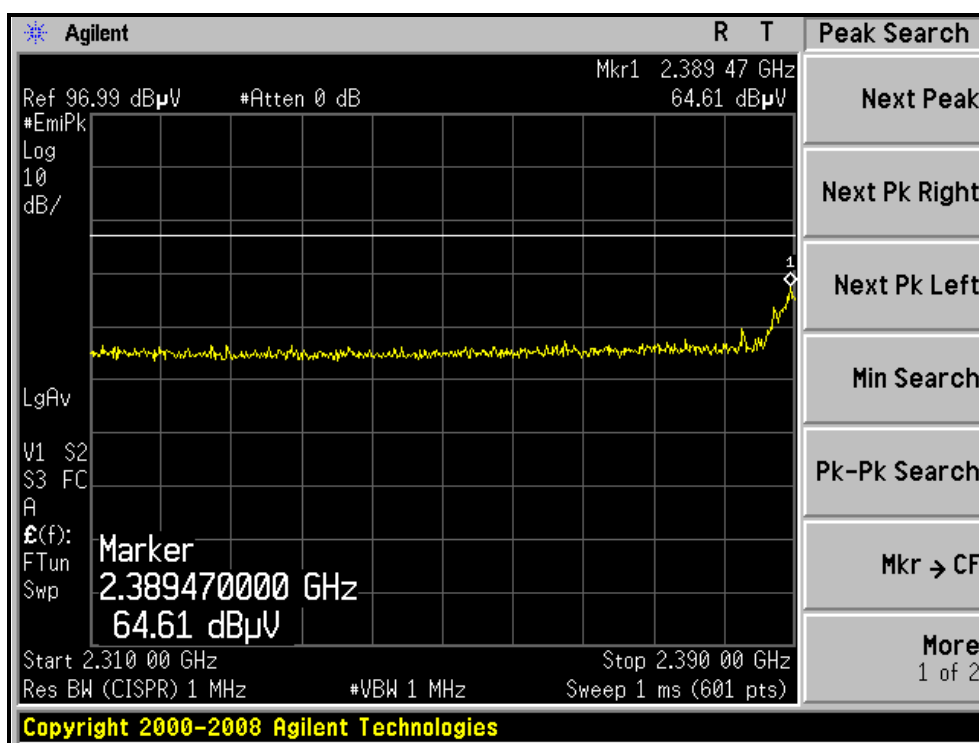

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, HORIZONTAL)

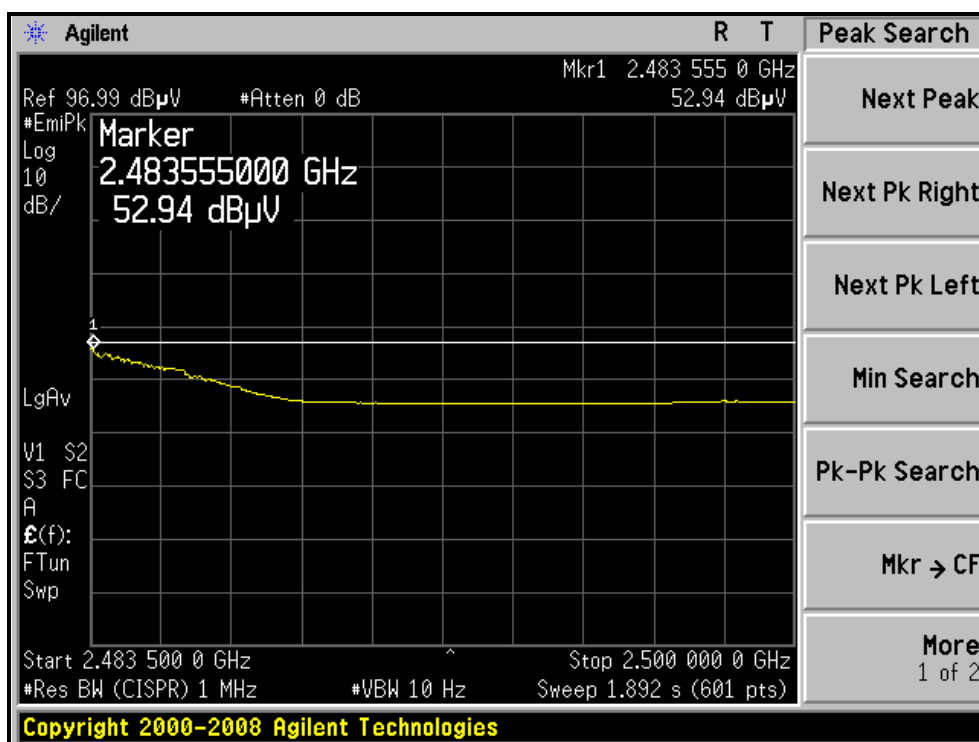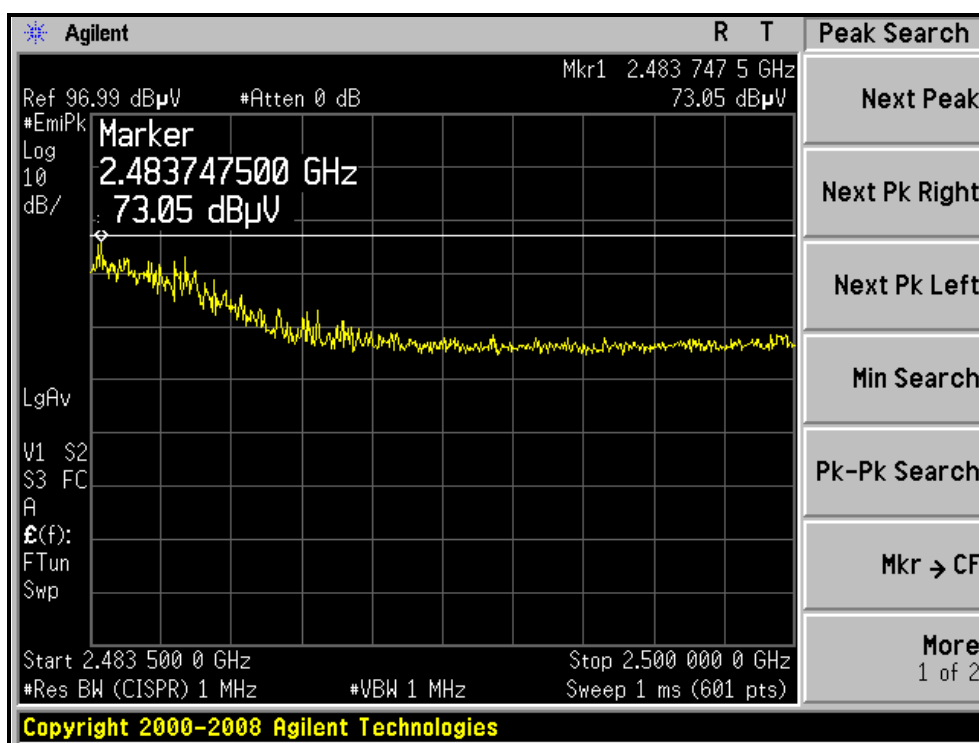

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, VERTICAL)

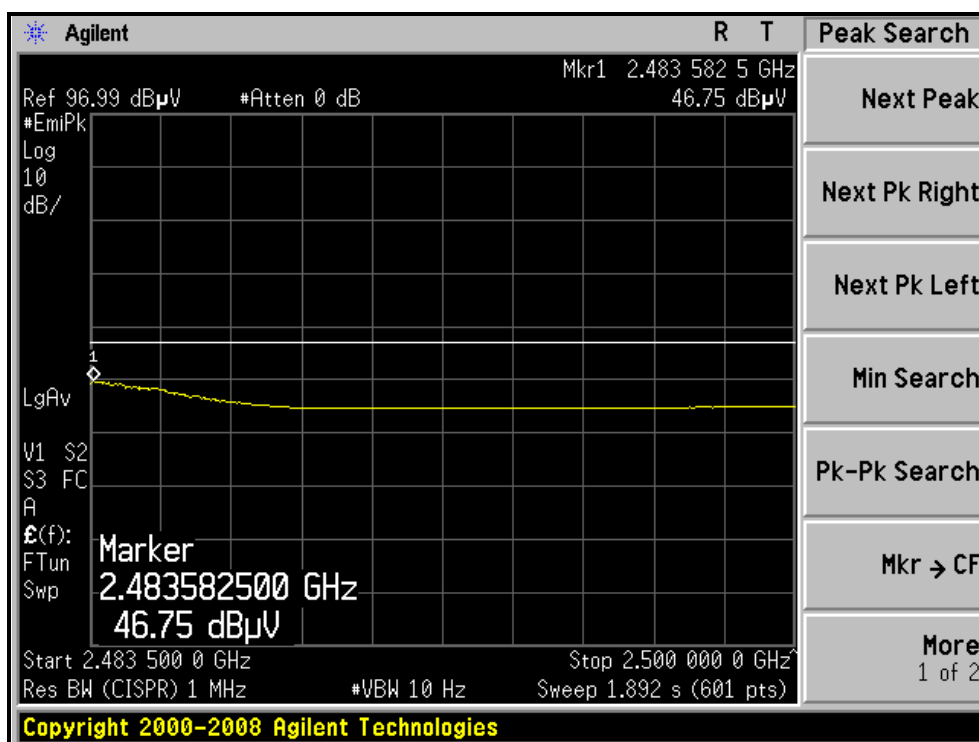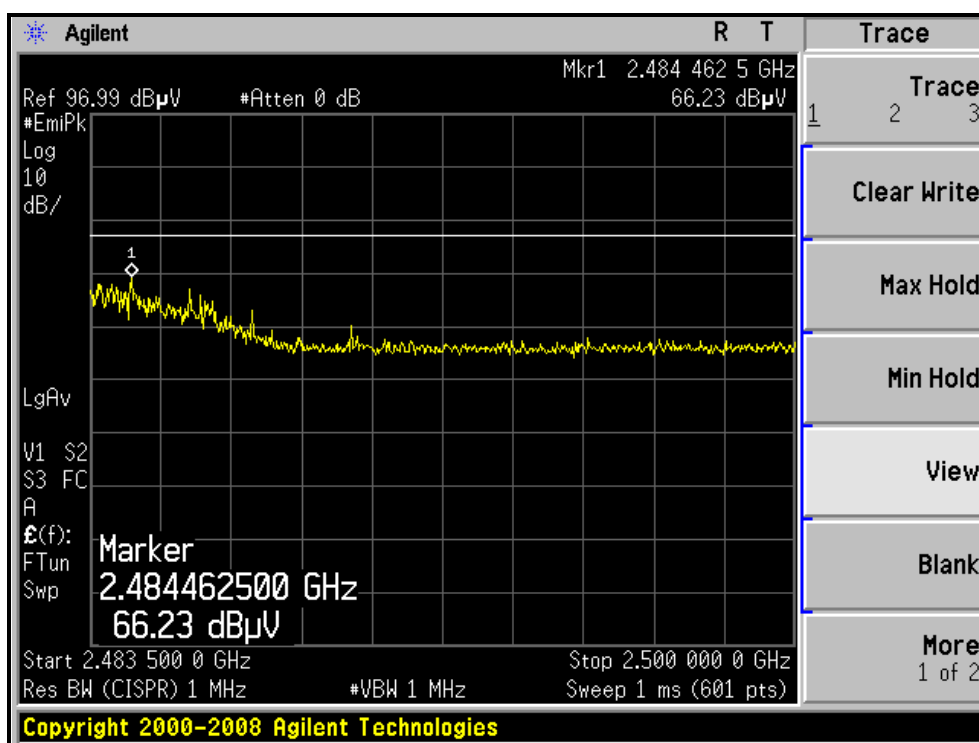



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.26 PK	74.00	-1.74	1.55 H	2	41.98	30.28
2	2390.00	53.20 AV	54.00	-0.80	1.55 H	2	22.92	30.28
3	*2422.00	103.64 PK			1.53 H	3	73.24	30.40
4	*2422.00	90.70 AV			1.53 H	3	60.30	30.40
5	4844.00	47.26 PK	74.00	-26.74	1.49 H	213	10.42	36.84
6	4844.00	35.05 AV	54.00	-18.95	1.49 H	213	-1.79	36.84
7	7266.00	51.24 PK	74.00	-22.76	1.02 H	24	8.10	43.14
8	7266.00	38.01 AV	54.00	-15.99	1.02 H	24	-5.13	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.10 PK	74.00	-7.90	1.71 V	2	35.82	30.28
2	2390.00	48.03 AV	54.00	-5.97	1.71 V	2	17.75	30.28
3	*2422.00	96.86 PK			1.71 V	0	66.46	30.40
4	*2422.00	84.62 AV			1.71 V	0	54.22	30.40
5	4844.00	44.74 PK	74.00	-29.26	1.20 V	37	7.90	36.84
6	4844.00	33.27 AV	54.00	-20.73	1.20 V	37	-3.57	36.84
7	7266.00	50.24 PK	74.00	-23.76	1.24 V	51	7.10	43.14
8	7266.00	38.54 AV	54.00	-15.46	1.24 V	51	-4.60	43.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.15 PK	74.00	-2.85	1.60 H	7	40.87	30.28
2	2390.00	51.91 AV	54.00	-2.09	1.60 H	7	21.63	30.28
3	*2437.00	109.15 PK			1.52 H	358	78.69	30.46
4	*2437.00	96.14 AV			1.52 H	358	65.68	30.46
5	2483.50	73.41 PK	74.00	-0.59	1.52 H	5	42.78	30.63
6	2483.50	53.37 AV	54.00	-0.63	1.52 H	5	22.74	30.63
7	4874.00	46.77 PK	74.00	-27.23	1.38 H	208	9.85	36.92
8	4874.00	35.21 AV	54.00	-18.79	1.38 H	208	-1.71	36.92
9	7311.00	50.83 PK	74.00	-23.17	1.41 H	265	7.69	43.14
10	7311.00	38.62 AV	54.00	-15.38	1.41 H	265	-4.52	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.34 PK	74.00	-11.66	1.71 V	1	32.06	30.28
2	2390.00	46.73 AV	54.00	-7.27	1.71 V	1	16.45	30.28
3	*2437.00	100.46 PK			1.70 V	0	70.00	30.46
4	*2437.00	87.58 AV			1.70 V	0	57.12	30.46
5	2483.50	64.39 PK	74.00	-9.61	1.71 V	0	33.76	30.63
6	2483.50	48.73 AV	54.00	-5.27	1.71 V	0	18.10	30.63
7	4874.00	46.66 PK	74.00	-27.34	1.52 V	223	9.74	36.92
8	4874.00	33.88 AV	54.00	-20.12	1.52 V	223	-3.04	36.92
9	7311.00	50.75 PK	74.00	-23.25	1.22 V	38	7.61	43.14
10	7311.00	38.56 AV	54.00	-15.44	1.22 V	38	-4.58	43.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	31.0deg. C, 61.0%RH 965hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.40 PK			1.51 H	3	72.89	30.51
2	*2452.00	90.76 AV			1.51 H	3	60.25	30.51
3	2483.50	72.67 PK	74.00	-1.33	1.52 H	13	42.04	30.63
4	2483.50	52.32 AV	54.00	-1.68	1.52 H	13	21.69	30.63
5	4904.00	46.65 PK	74.00	-27.35	1.32 H	209	9.65	37.00
6	4904.00	34.06 AV	54.00	-19.94	1.32 H	209	-2.94	37.00
7	7356.00	50.96 PK	74.00	-23.04	1.44 H	266	7.83	43.13
8	7356.00	38.72 AV	54.00	-15.28	1.44 H	266	-4.41	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	97.21 PK			1.66 V	2	66.70	30.51
2	*2452.00	84.11 AV			1.66 V	2	53.60	30.51
3	2487.00	68.52 PK	74.00	-5.48	1.66 V	2	37.88	30.64
4	2487.00	50.06 AV	54.00	-3.94	1.66 V	2	19.42	30.64
5	4904.00	45.43 PK	74.00	-28.57	1.50 V	336	8.43	37.00
6	4904.00	33.72 AV	54.00	-20.28	1.50 V	336	-3.28	37.00
7	7356.00	50.92 PK	74.00	-23.08	1.27 V	31	7.79	43.13
8	7356.00	38.66 AV	54.00	-15.34	1.27 V	31	-4.47	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.





A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH1, HORIZONTAL)

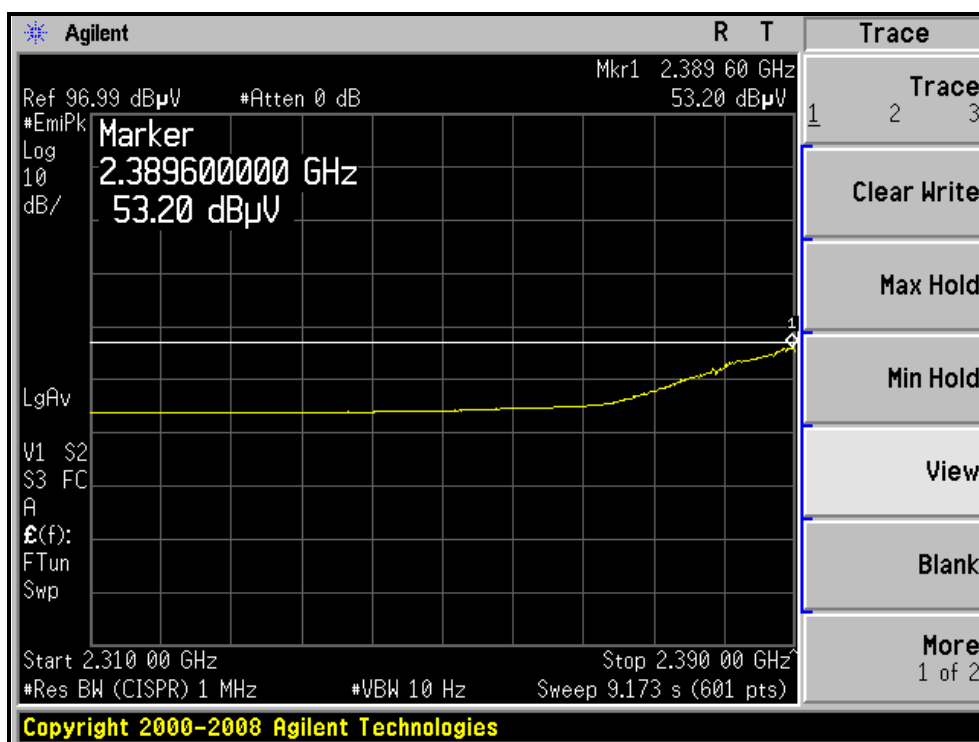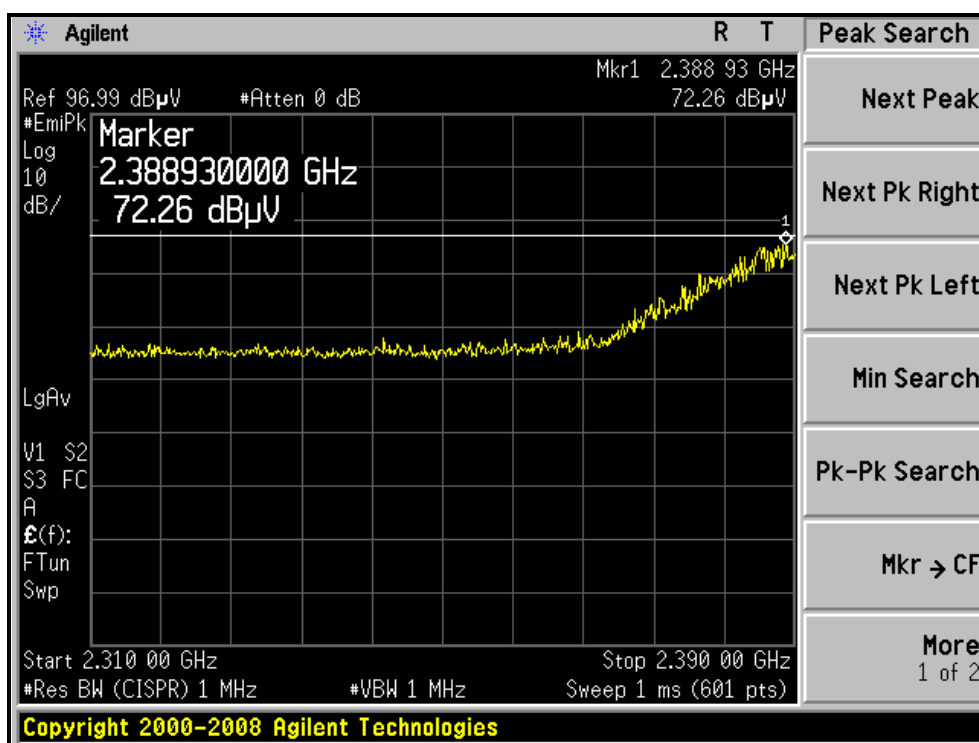



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH1, VERTICAL)

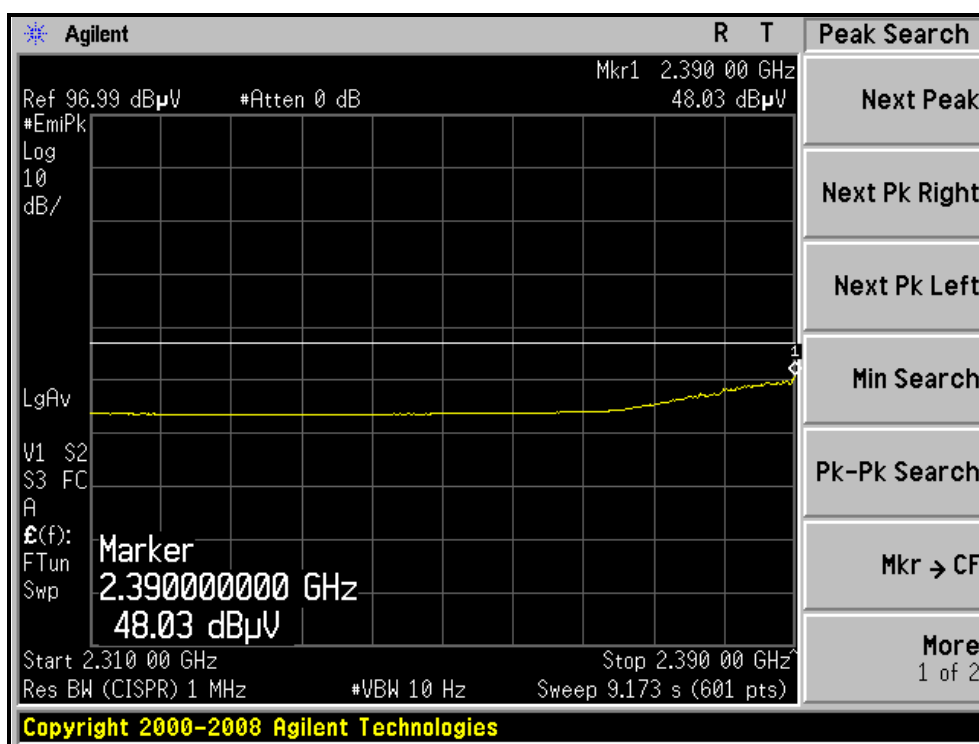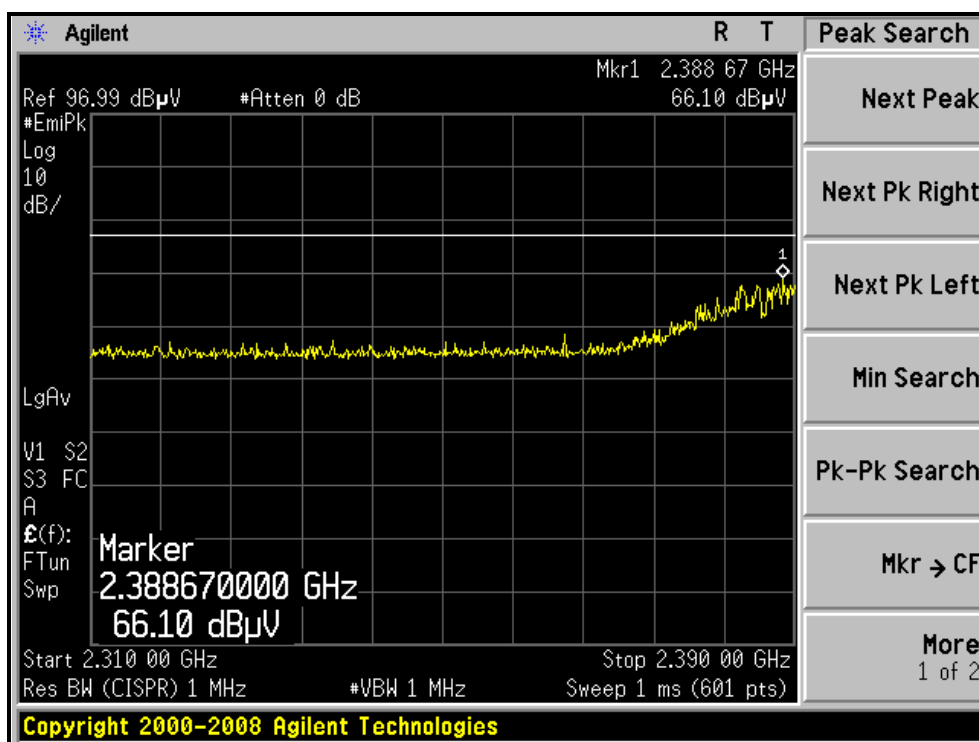

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, HORIZONTAL)

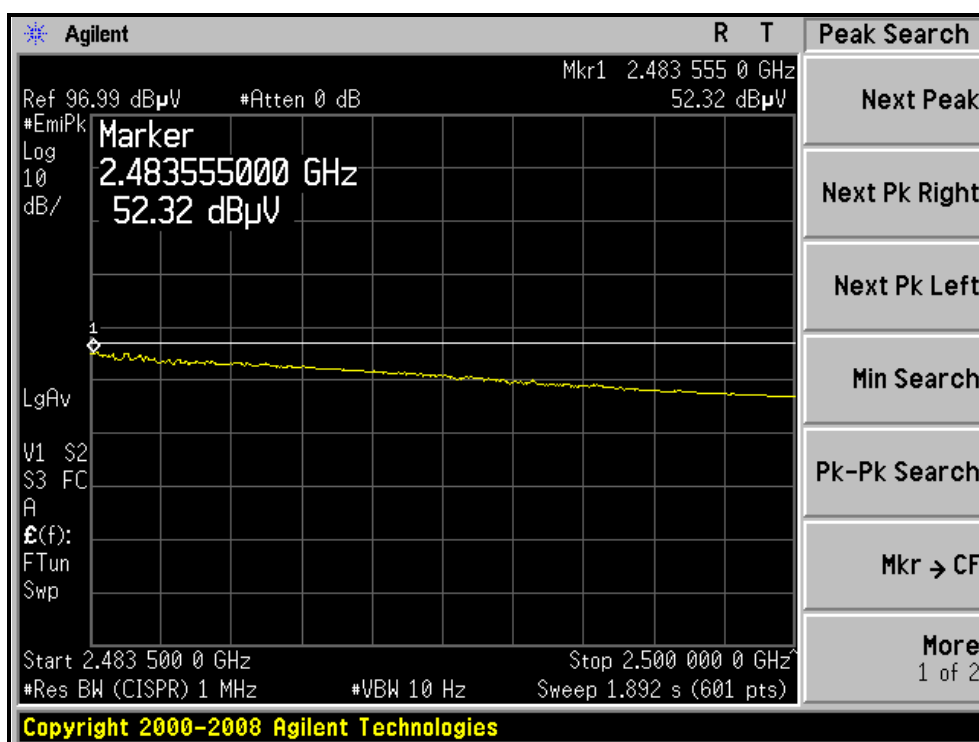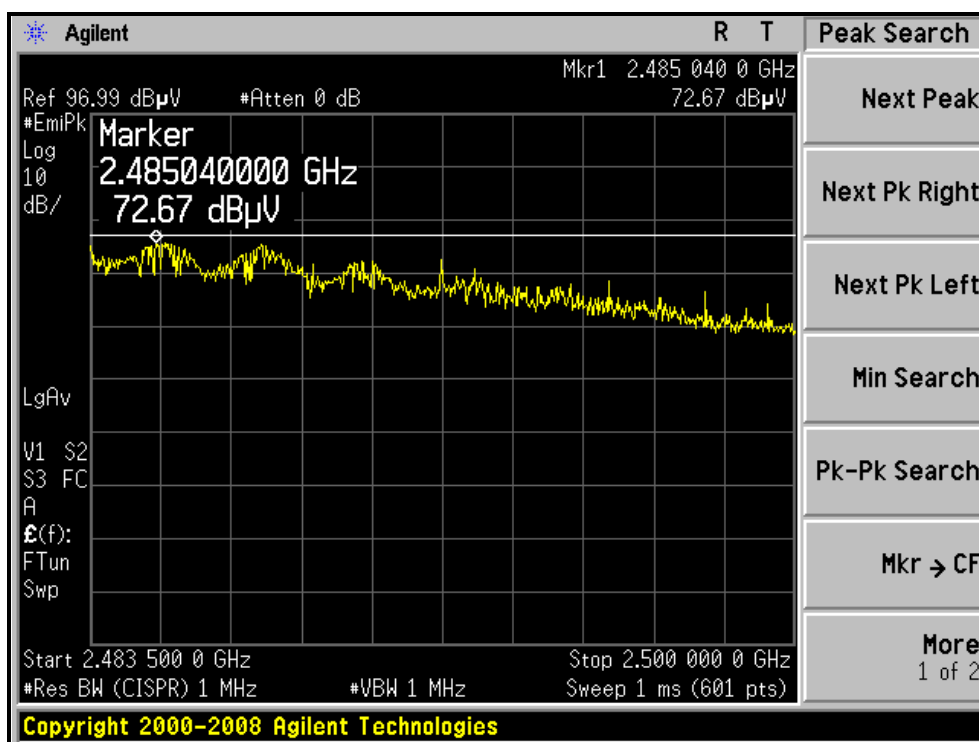

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, VERTICAL)

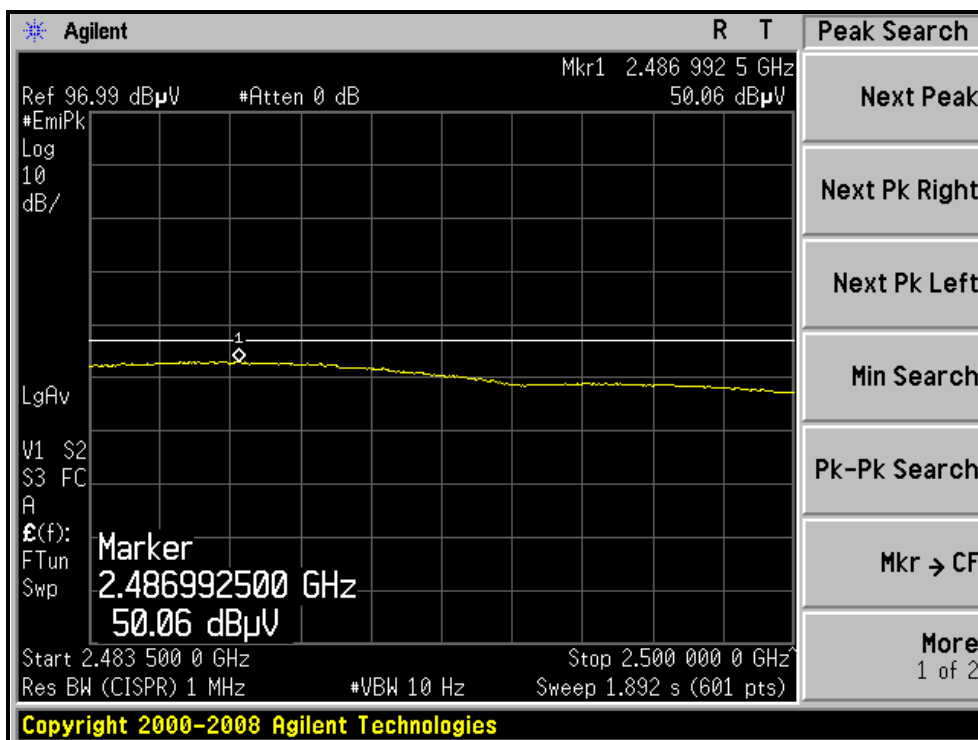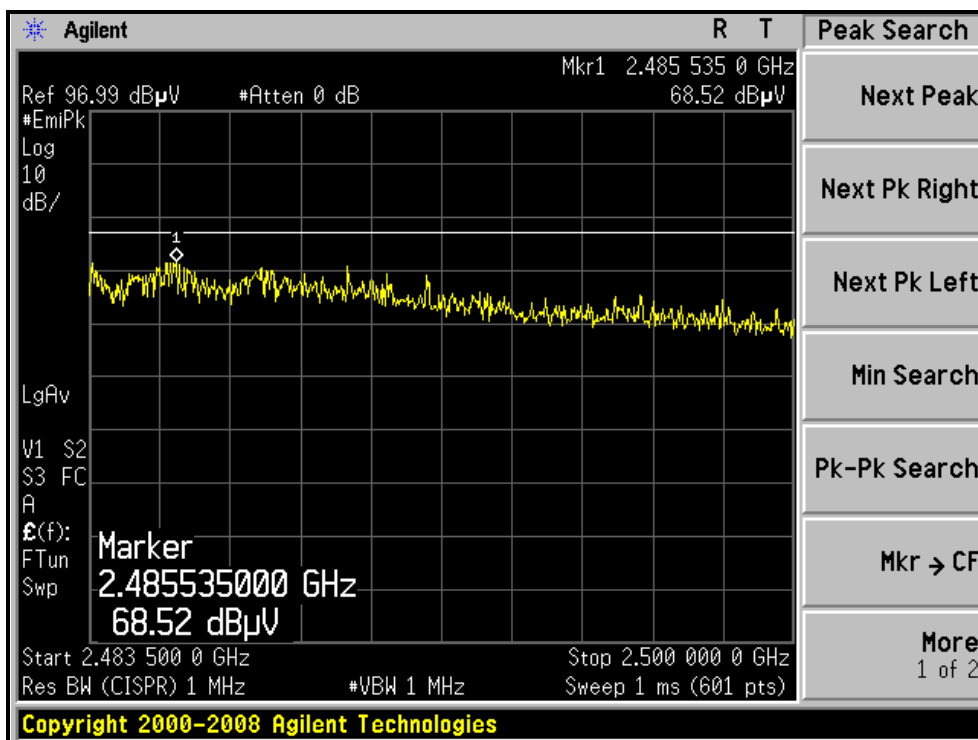

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 09, 2009	Aug. 08, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.89	0.5	PASS
6	2437	10.51	0.5	PASS
11	2462	10.81	0.5	PASS


CH1

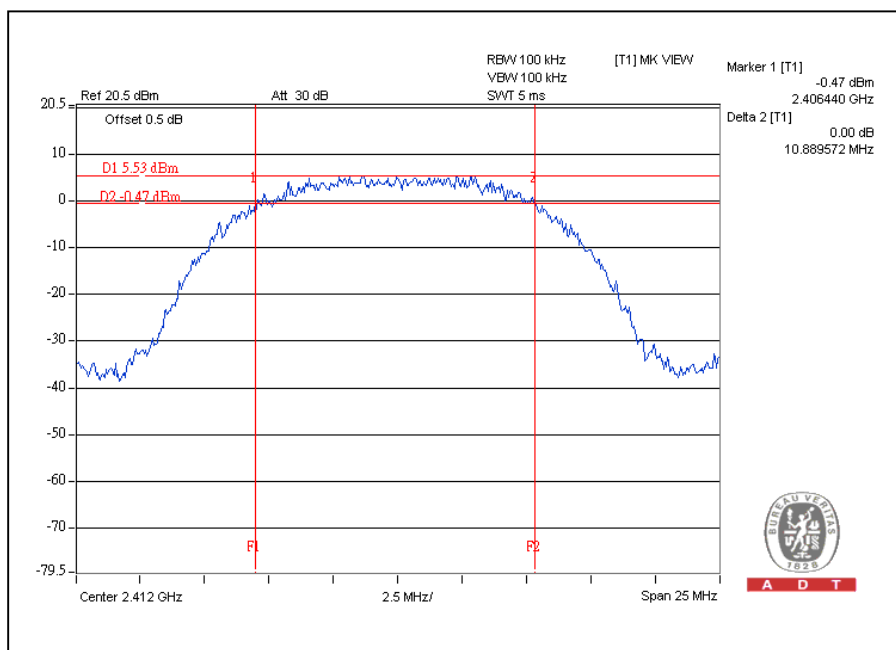




A D T

CH6

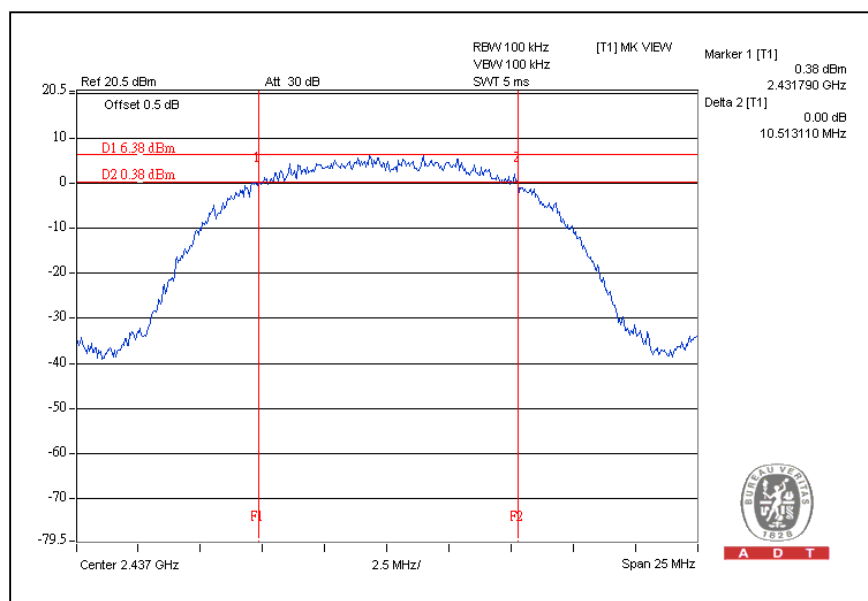

A D T

CH11

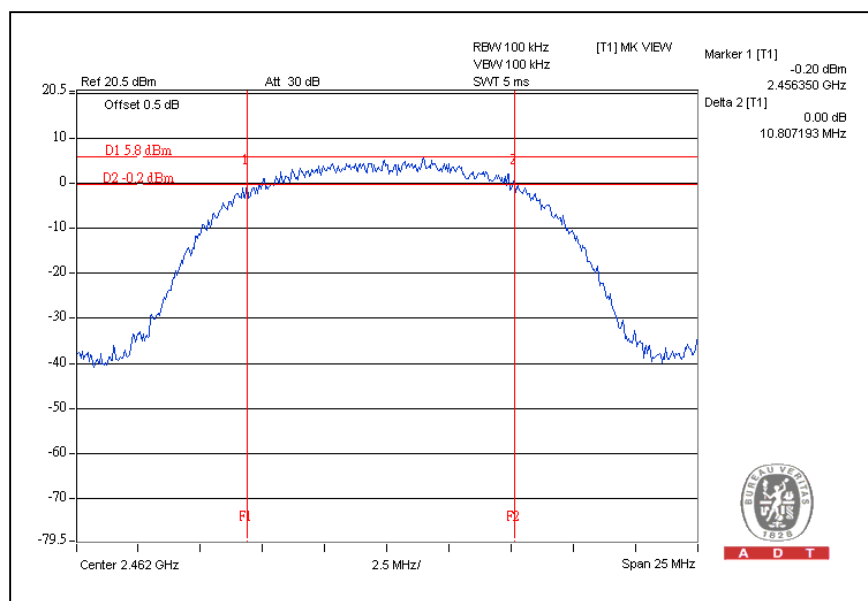

A D T




A D T

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.39	0.5	PASS
6	2437	16.41	0.5	PASS
11	2462	16.45	0.5	PASS


CH1

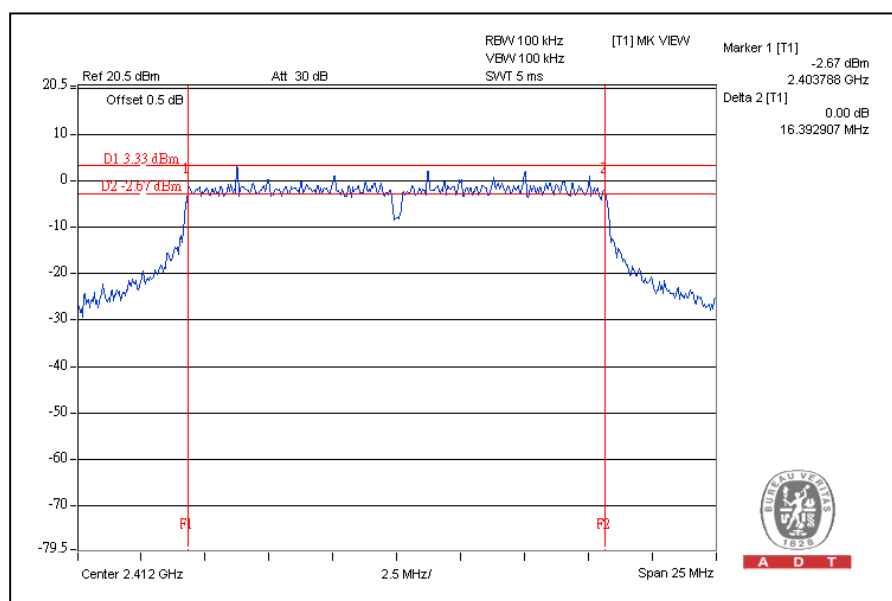




A D T

CH6

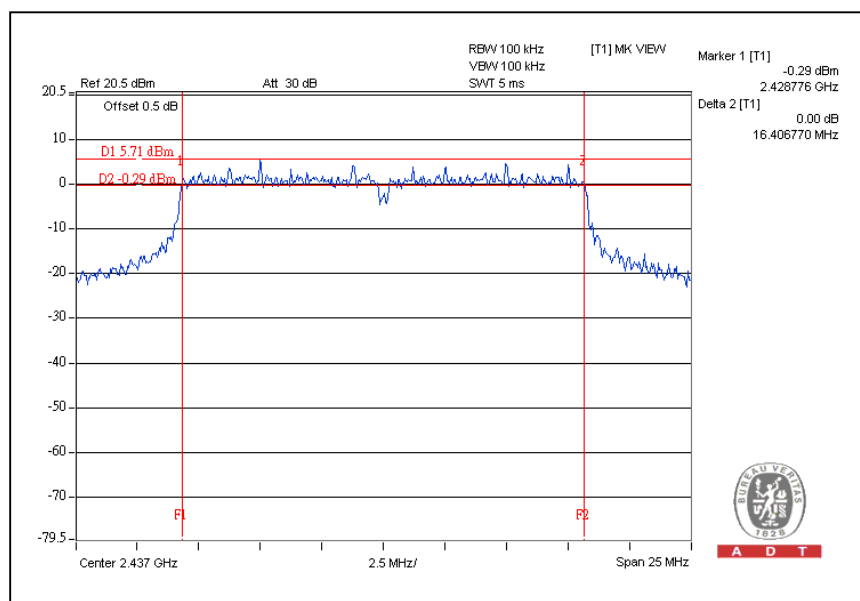

CH11

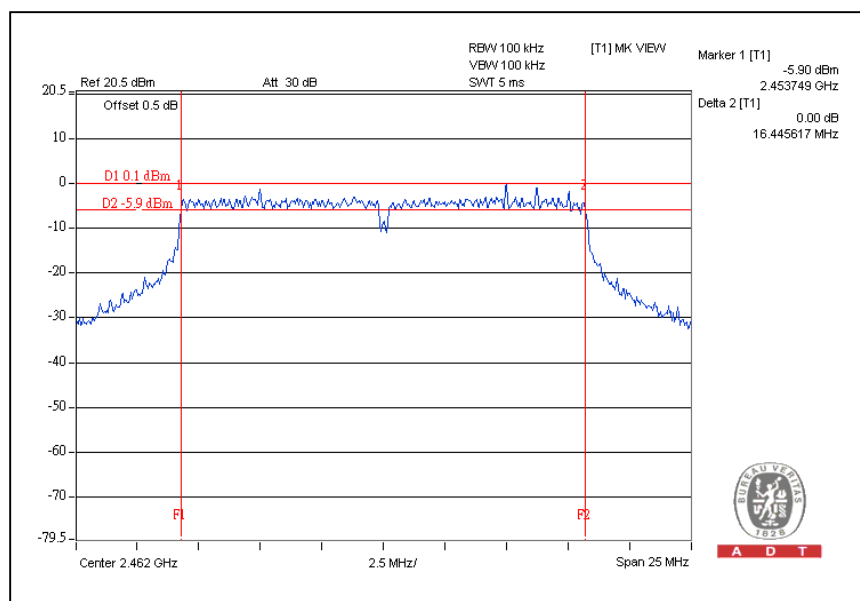


DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.67	0.5	PASS
6	2437	17.65	0.5	PASS
11	2462	17.66	0.5	PASS


CH1

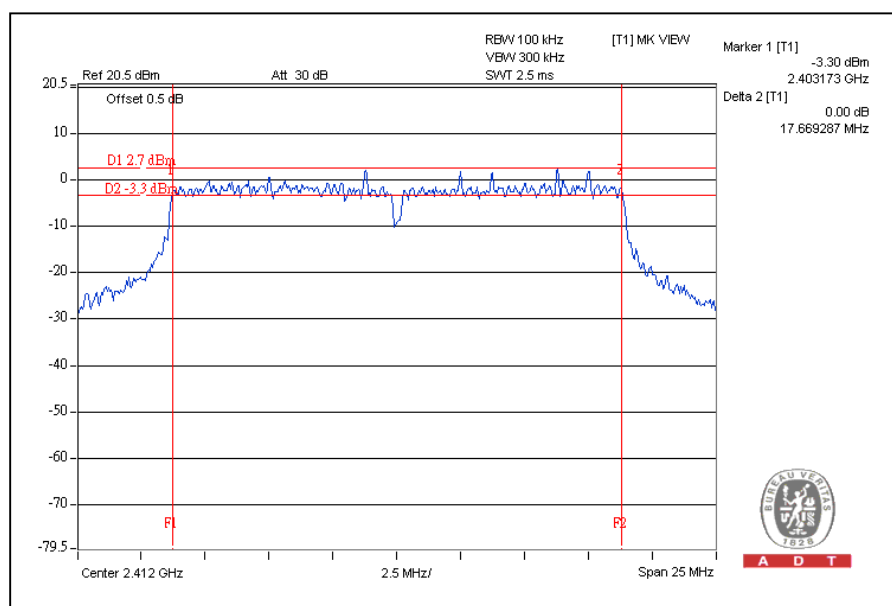




A D T

CH6

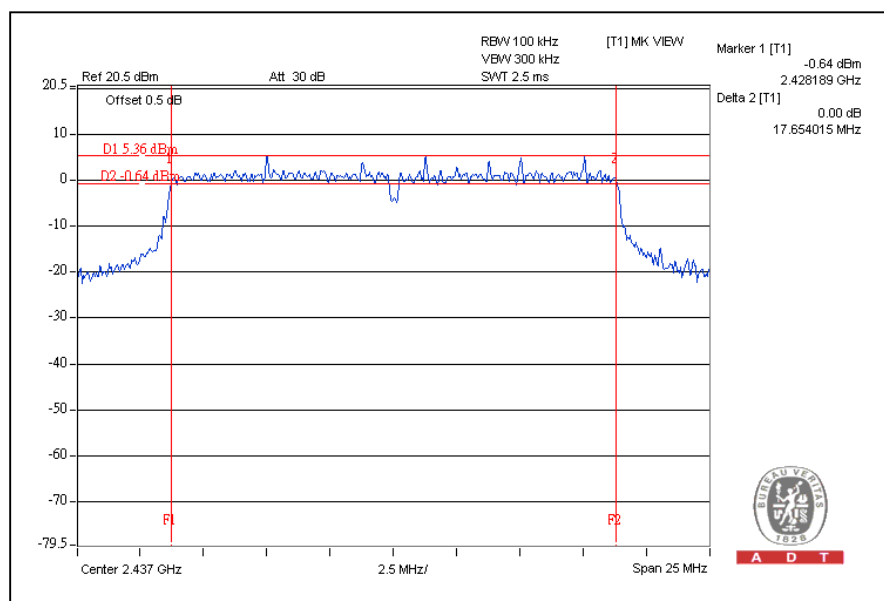

CH11

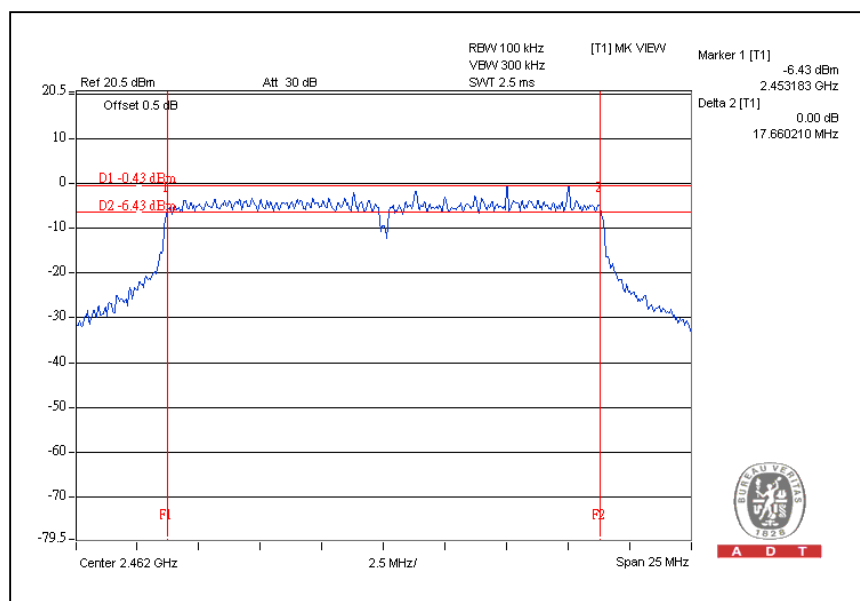


DRAFT 802.11n (40MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 962hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	36.44	0.5	PASS
4	2437	36.44	0.5	PASS
7	2452	36.44	0.5	PASS


CH1

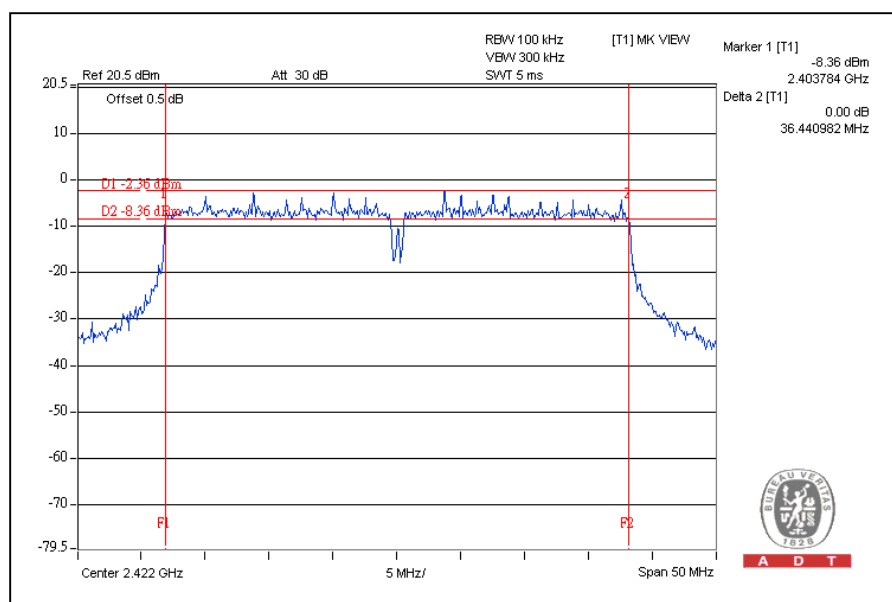

CH4

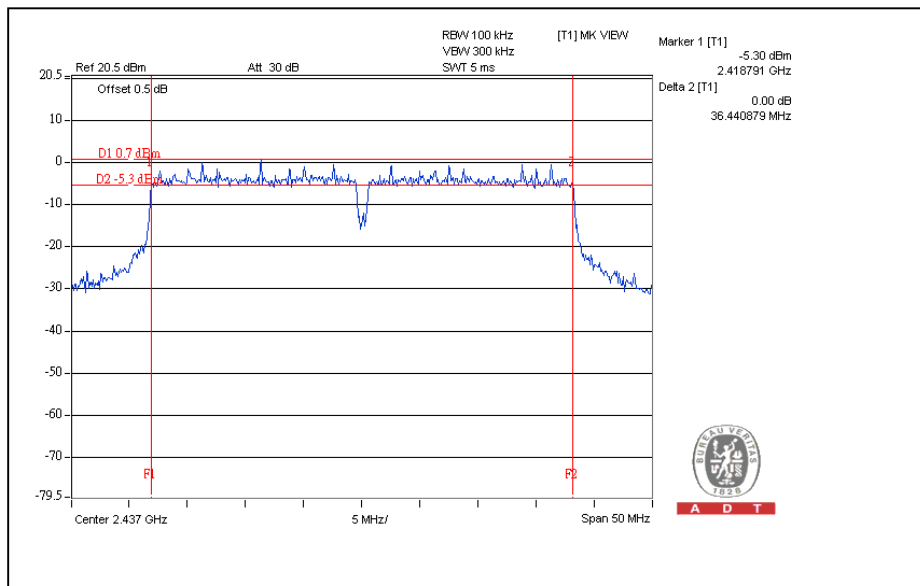

CH7

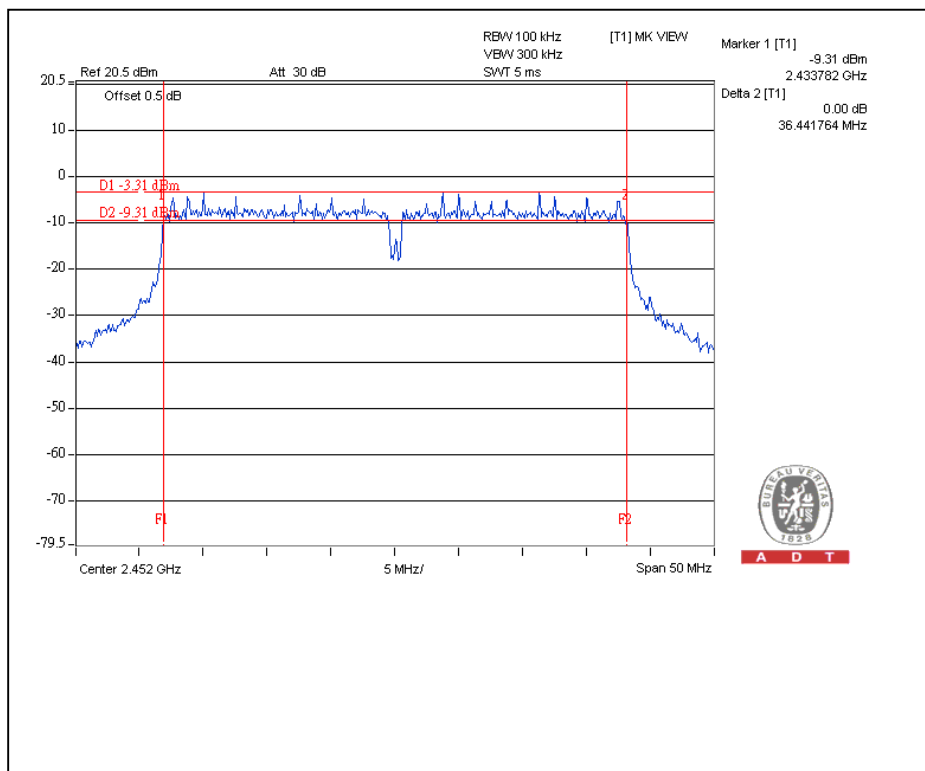

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Anritsu Power Meter	ML2495A	0824006	April 25, 2009	April 24, 2010
Pulse Power Sensor	MA2411B	0738172	April 25, 2009	April 24, 2010

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

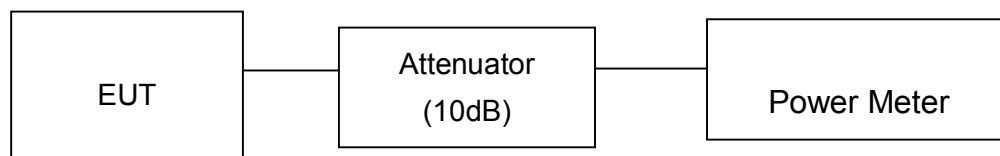

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2412	76.033	80.538	18.81	19.06	156.571	21.95	30	PASS
6	2437	74.302	85.507	18.71	19.32	159.809	22.04	30	PASS
11	2462	66.069	67.608	18.20	18.30	133.677	21.26	30	PASS

Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi)=6

The effective legacy gain is 6dBi, therefore the limit doesn't reduce.

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2412	171.396	202.302	22.34	23.06	373.698	25.73	30	PASS
6	2437	243.781	266.073	23.87	24.25	509.854	27.07	30	PASS
11	2462	129.122	118.032	21.11	20.72	247.154	23.93	30	PASS

Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi)=6

The effective legacy gain is 6dBi, therefore the limit doesn't reduce.



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2412	171.396	175.388	22.34	22.44	346.784	25.40	30	PASS
6	2437	236.592	267.917	23.74	24.28	504.509	27.03	30	PASS
11	2462	106.660	124.738	20.28	20.96	231.398	23.64	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2422	171.396	188.365	22.34	22.75	359.761	25.56	30	PASS
4	2437	214.289	251.768	23.31	24.01	466.057	26.68	30	PASS
7	2452	129.718	126.474	21.13	21.02	256.192	24.09	30	PASS

4.5 AVERAGE OUTPUT POWER

4.5.1 FOR REFERENCE.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Anritsu Power Meter	ML2495A	0824006	April 25, 2009	April 24, 2010
Pulse Power Sensor	MA2411B	0738172	April 25, 2009	April 24, 2010


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator, the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the average power level.

4.5.4 TEST SETUP

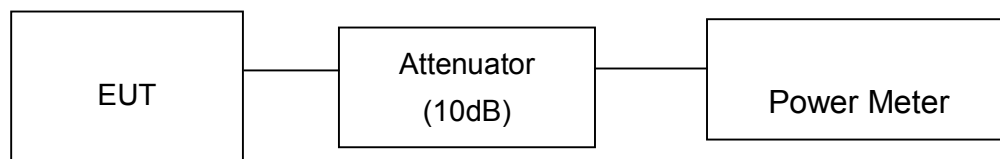

4.5.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5



A D T

4.5.6 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER OUTPUT (dBm)		TOTAL AVERAGE POWER (dBm)
		CHAIN(0)	CHAIN(1)	
1	2412	16.63	17.02	19.84
6	2437	16.71	17.25	20.00
11	2462	16.17	16.21	19.20

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER OUTPUT (dBm)		TOTAL AVERAGE POWER (dBm)
		CHAIN(0)	CHAIN(1)	
1	2412	14.04	14.80	17.45
6	2437	16.94	17.59	20.29
11	2462	11.94	11.77	14.87



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		

CHANN EL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER OUTPUT (dBm)		TOTAL AVERAGE POWER (dBm)
		CHAIN(0)	CHAIN(1)	
1	2412	13.88	13.86	16.88
6	2437	17.06	17.37	20.23
11	2462	10.71	11.32	14.04

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		

CHANN EL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER OUTPUT (dBm)		TOTAL AVERAGE POWER (dBm)
		CHAIN(0)	CHAIN(1)	
1	2422	12.13	12.15	15.15
4	2437	14.52	15.13	17.85
7	2452	10.08	9.62	12.87

4.6 POWER SPECTRAL DENSITY MEASUREMENT

4.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 09, 2009	Aug. 08, 2010

NOTE:

- 1.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.
The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.
2. The measurement include through a combiner with both chain and each chain when operate simultaneously.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

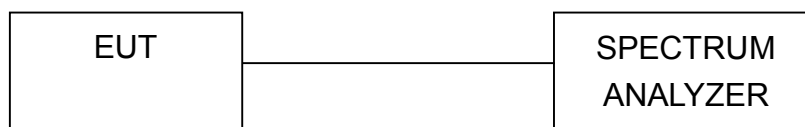

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.6.7 TEST RESULTS


802.11b DSSS MODULATION:

MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 962hPa
TESTED BY	Wen Yu		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY –With Combiner(dBm)	* TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2412	-5.51	-5.52	-0.84	-2.50	8	PASS
6	2437	-5.44	-4.79	-1.28	-2.09	8	PASS
11	2462	-3.94	-6.84	0.37	-2.14	8	PASS

* Aggregate PSD across transmitters in linear power units across each transmitter output.

For Chain (0): CH1

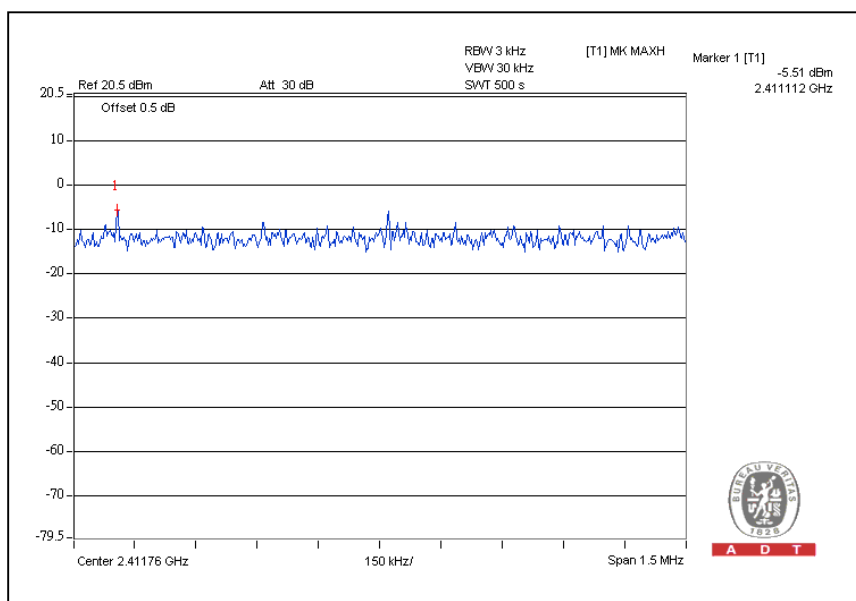


CH6

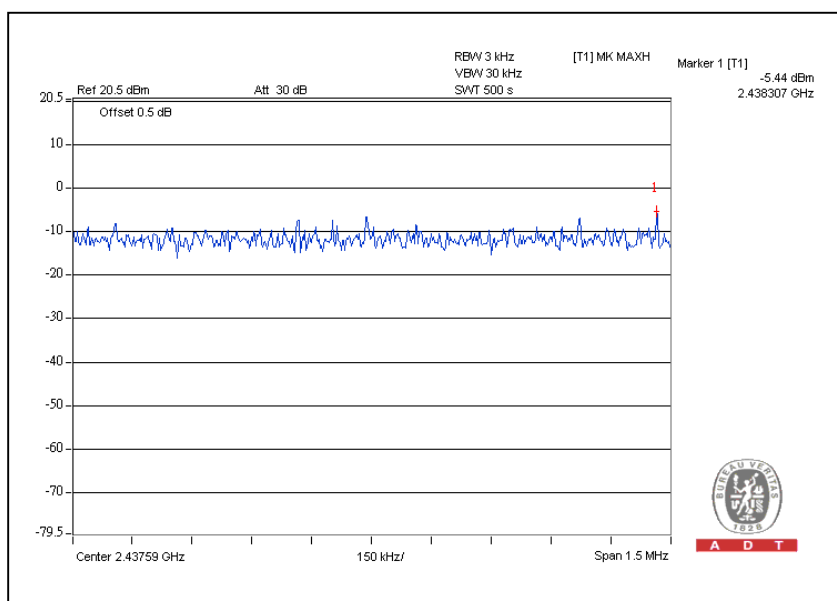




A D T


CH11

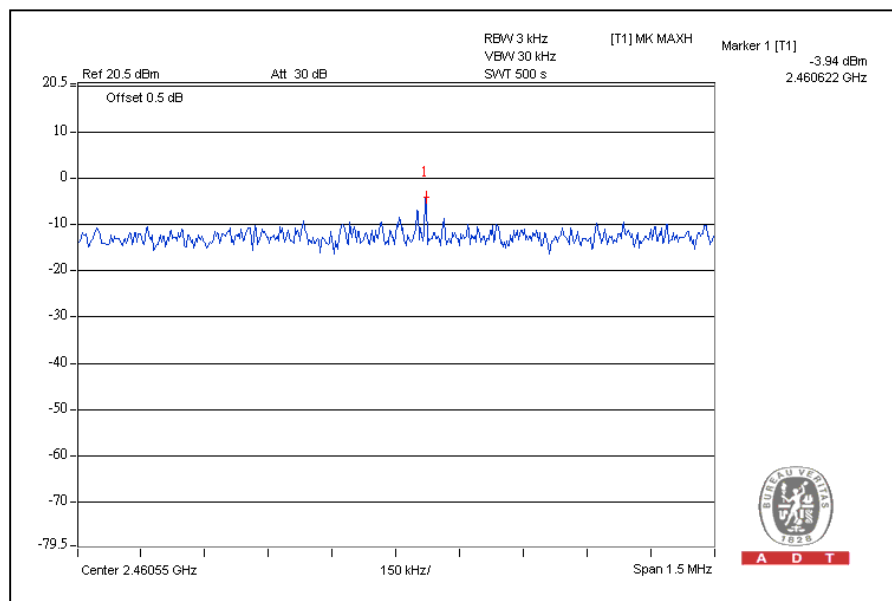

For Chain (1): CH1

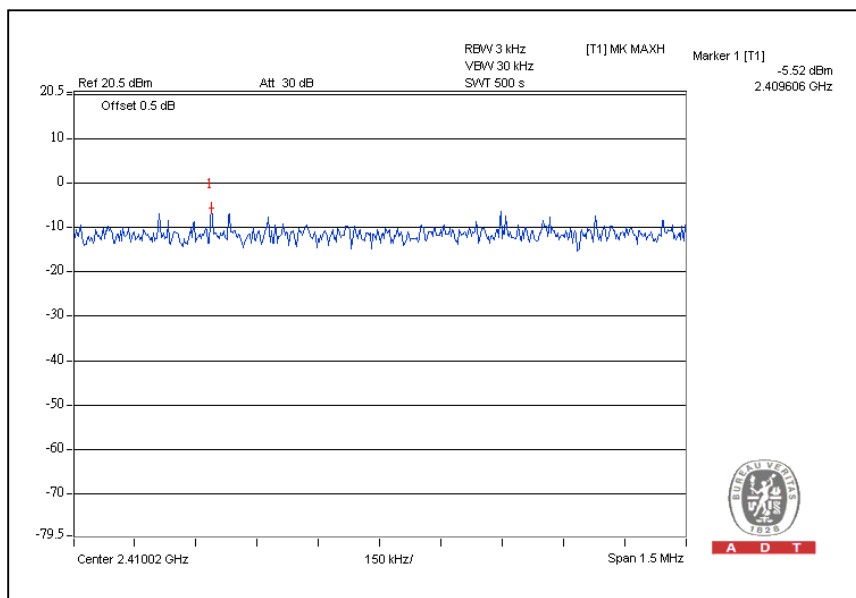


CH6

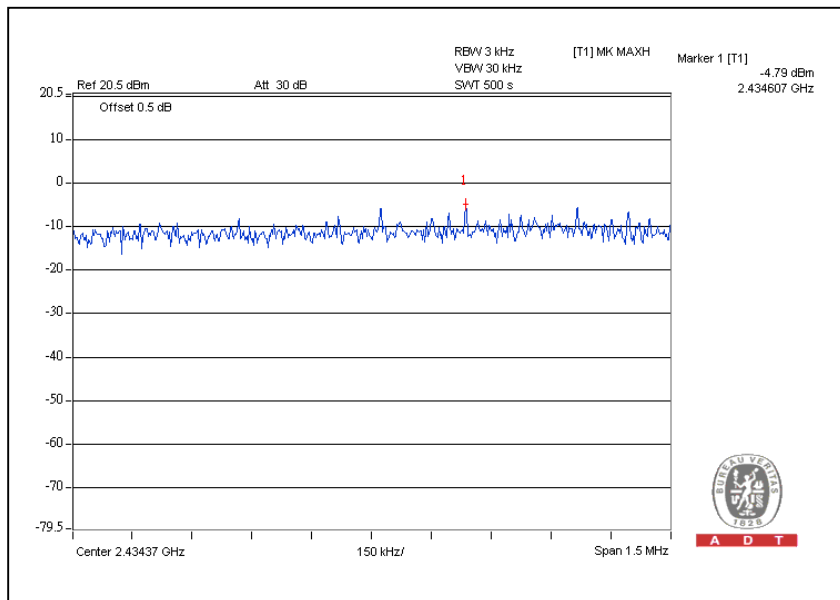




A D T


CH11

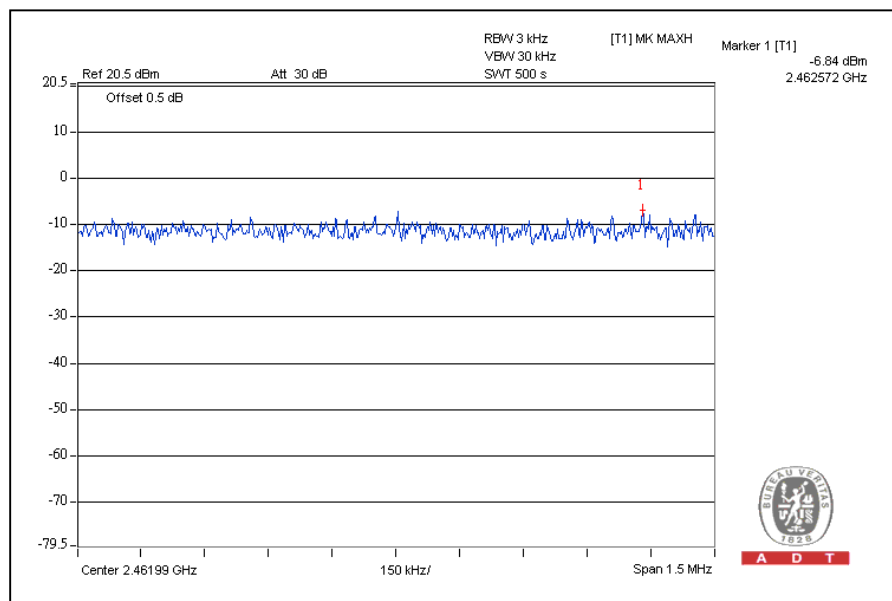

With Combiner : CH1

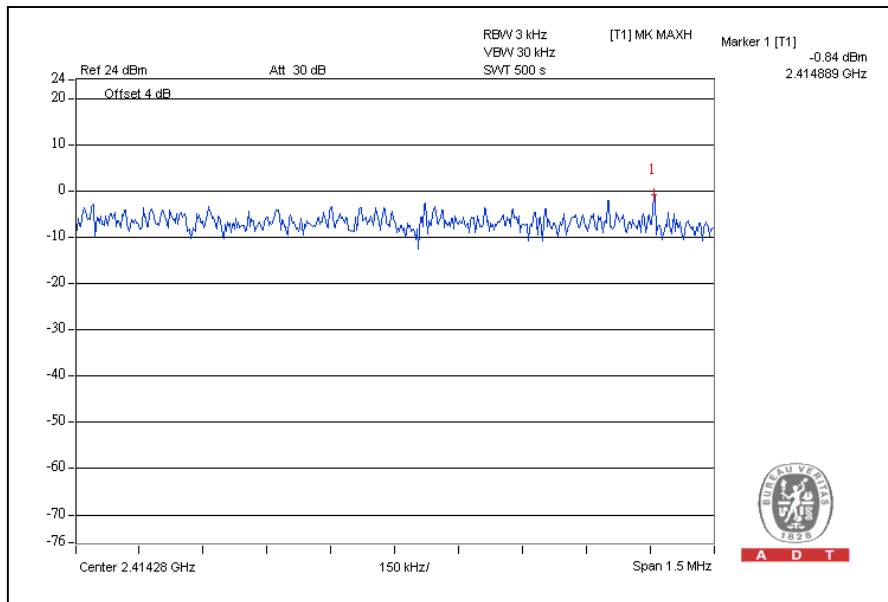


CH 6

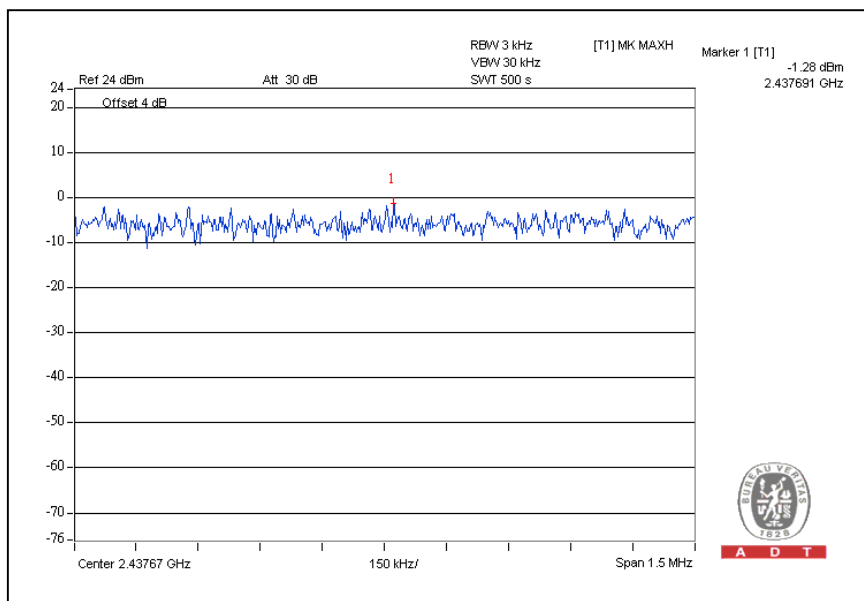



A D T

CH11

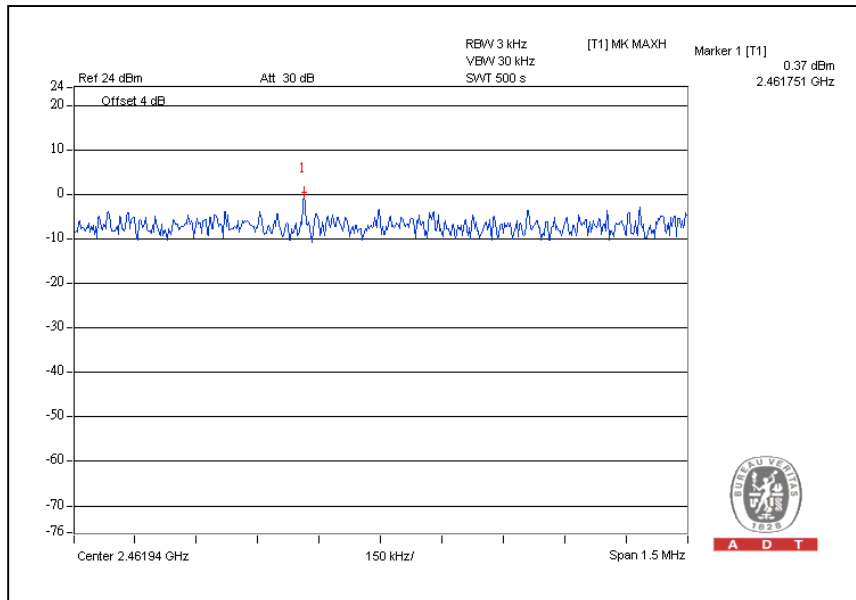



A D T


802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY –With Combiner(dBm)	* TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2412	-11.25	-11.83	-6.18	-8.51	8	PASS
6	2437	-6.66	-7.12	-3.67	-3.87	8	PASS
11	2462	-13.12	-12.51	-5.04	-9.79	8	PASS

* Aggregate PSD across transmitters in linear power units across each transmitter output.

For Chain (0): CH1

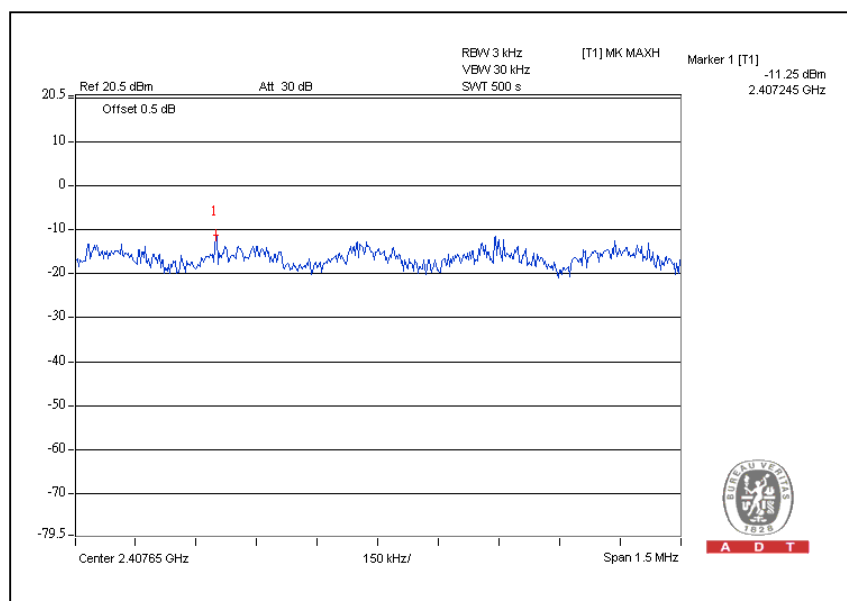


CH6

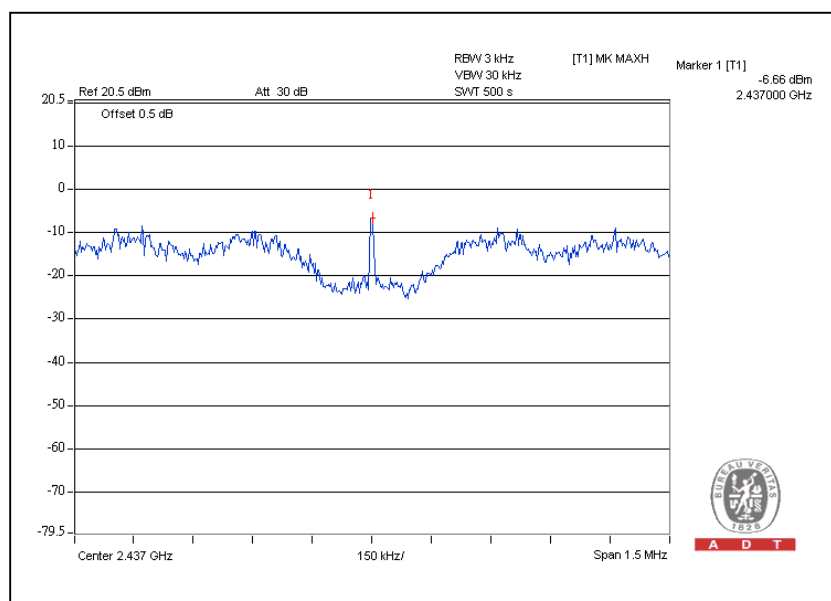




A D T


CH11

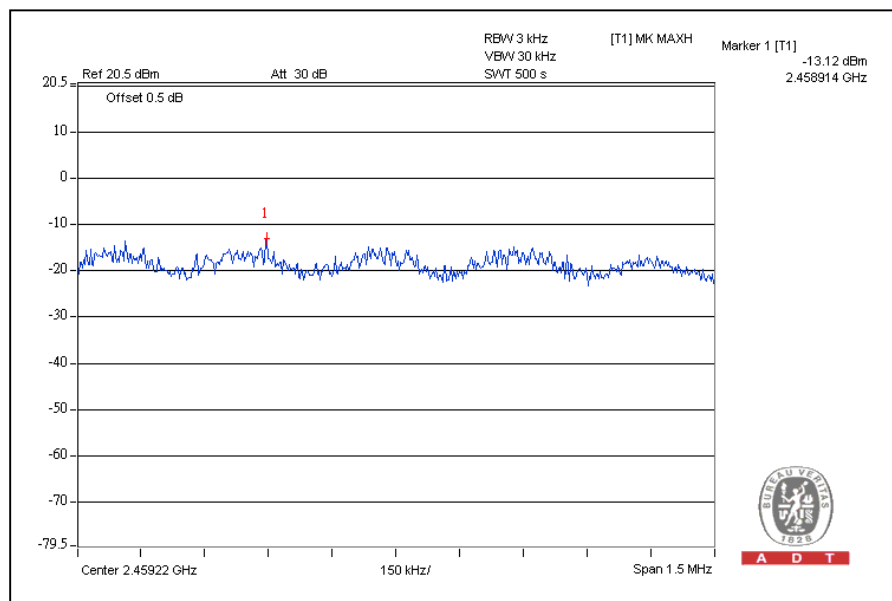

For Chain (1): CH1

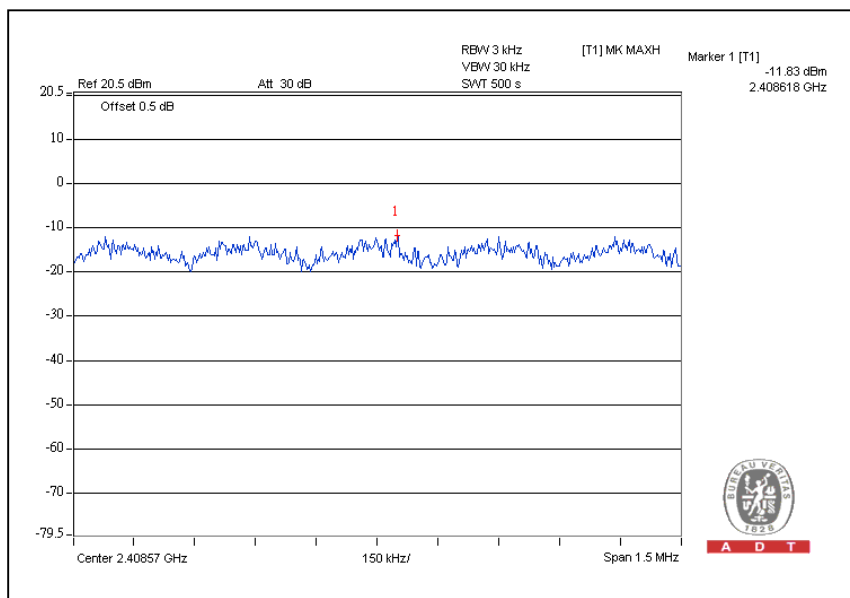


CH6

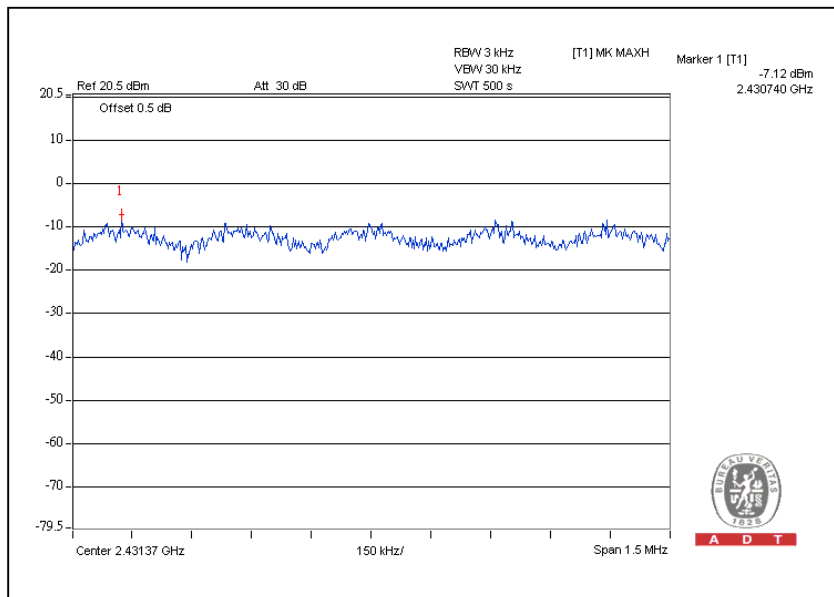




A D T


CH11

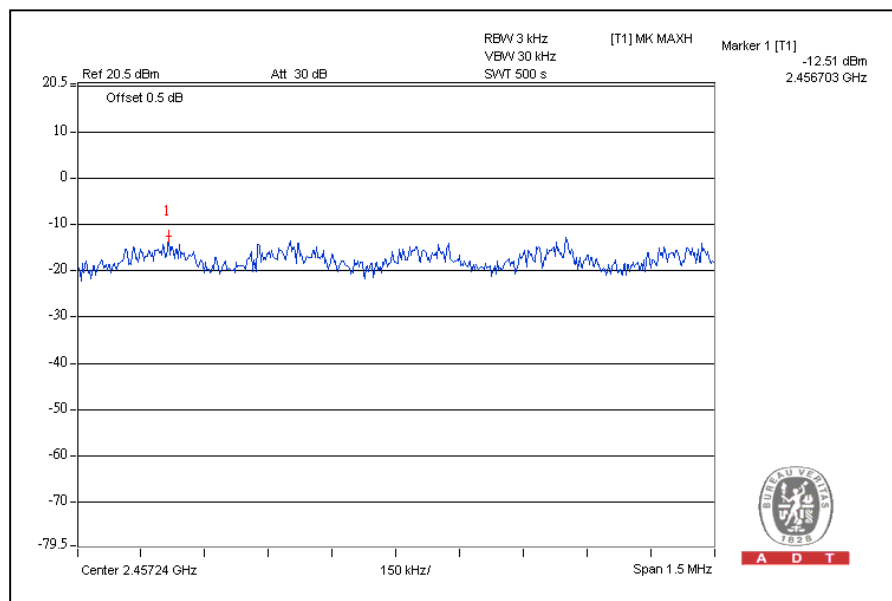


With Combiner : CH1

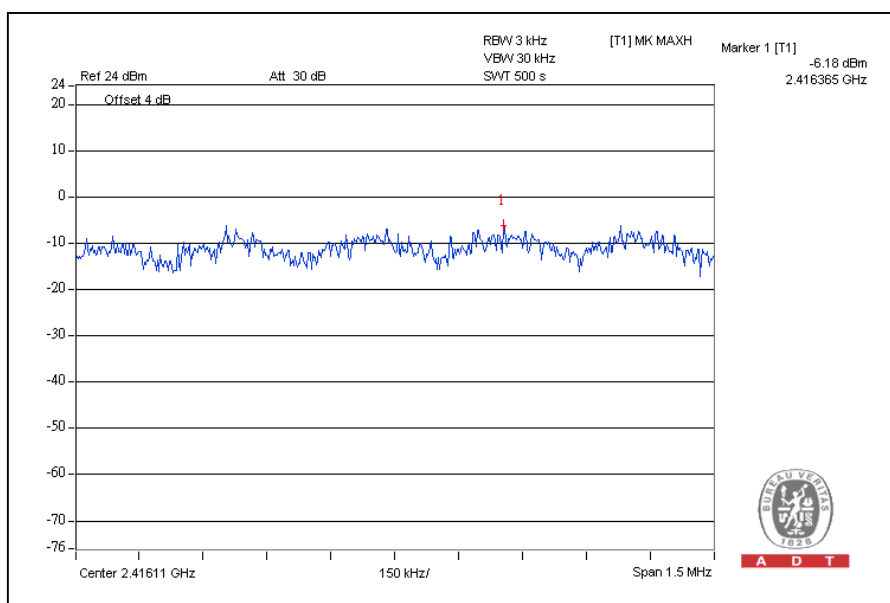

CH 6

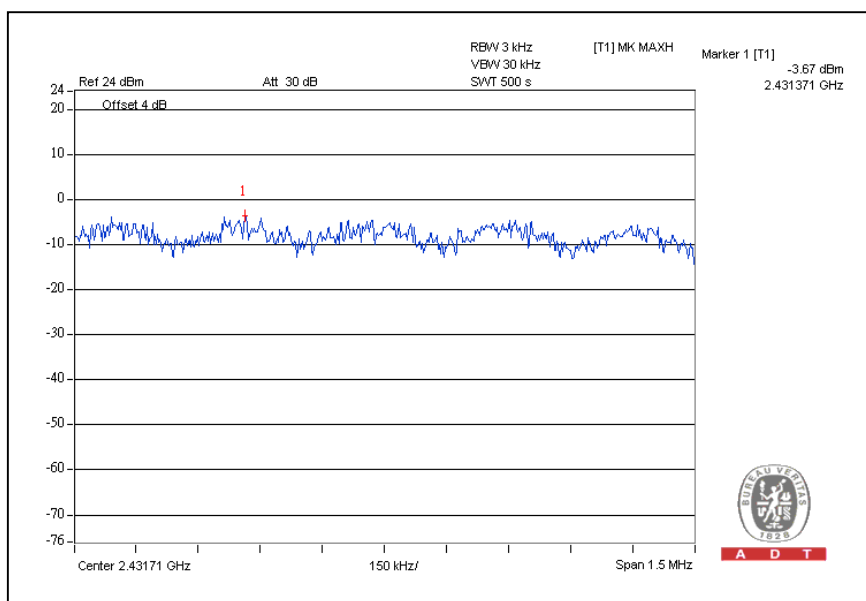

CH11

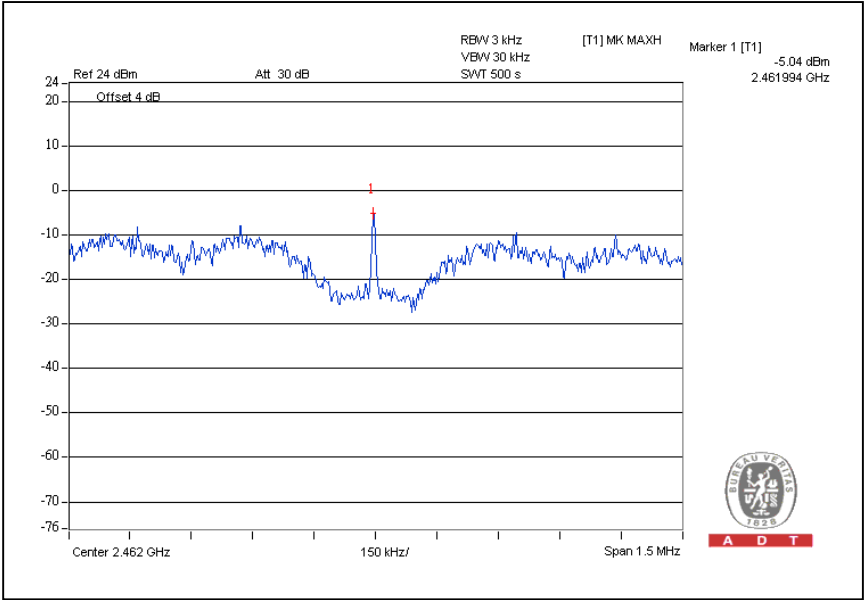



A D T


DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23 deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY -With Combiner(dBm)	* TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2412	-10.86	-10.83	-6.24	-7.83	8	PASS
6	2437	-8.45	-8.25	-3.15	-5.33	8	PASS
11	2462	-14.03	-15.03	-8.97	-11.49	8	PASS

* Aggregate PSD across transmitters in linear power units across each transmitter output.

For Chain (0): CH1

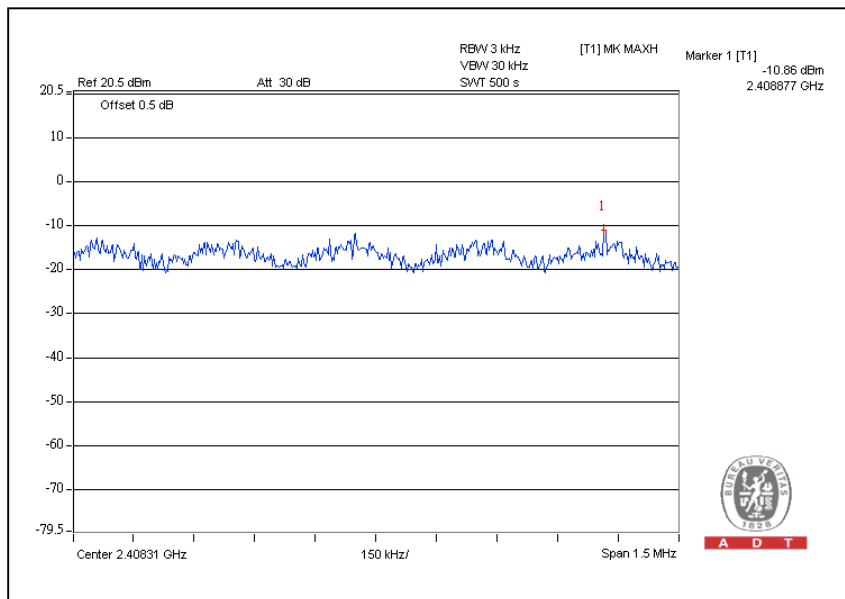


CH6

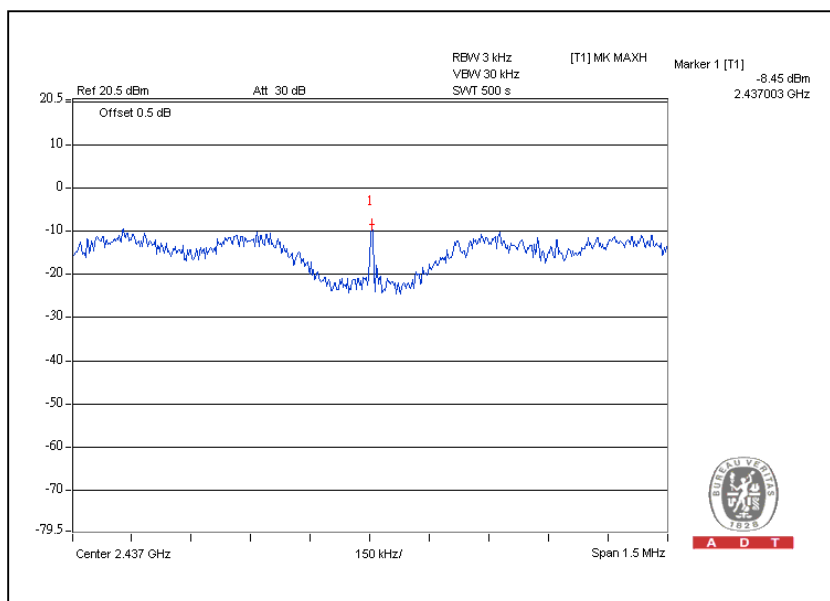




A D T


CH11

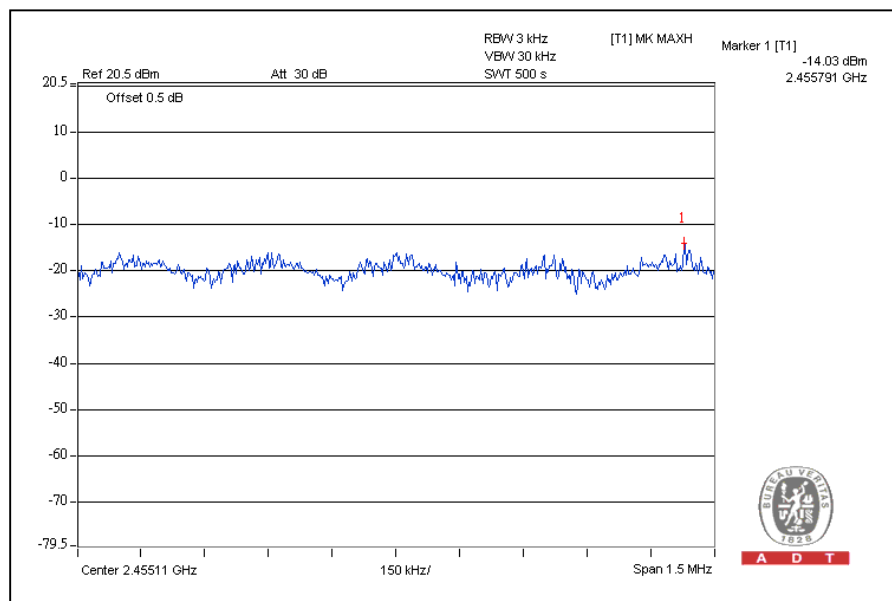

For Chain (1): CH1

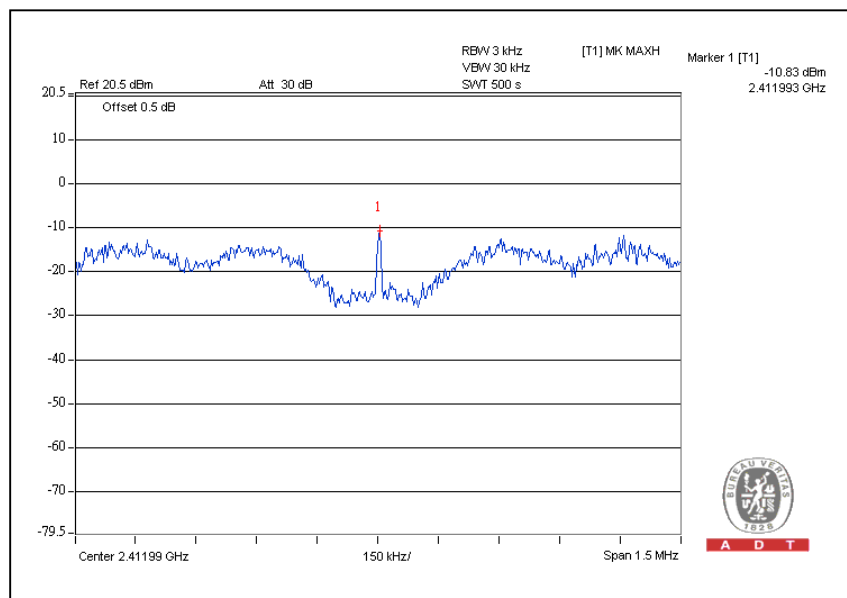


CH6

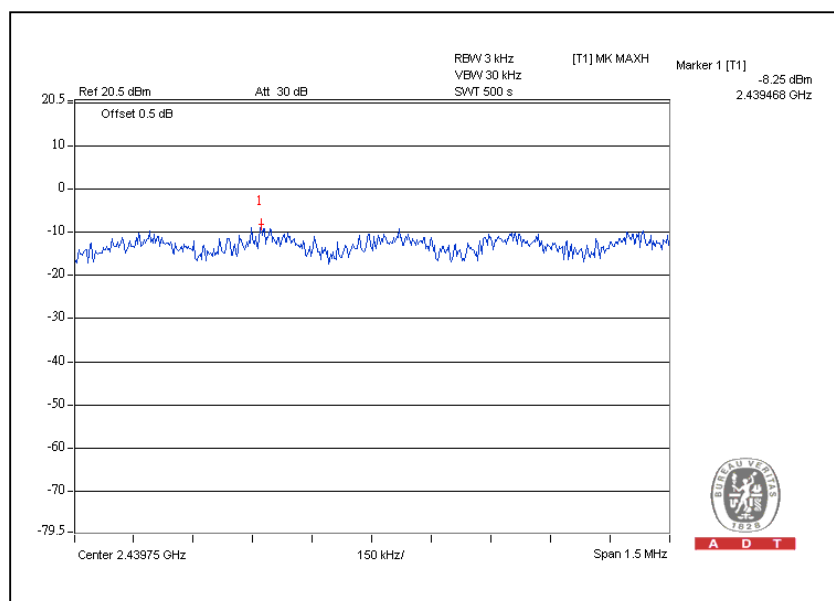




A D T


CH11

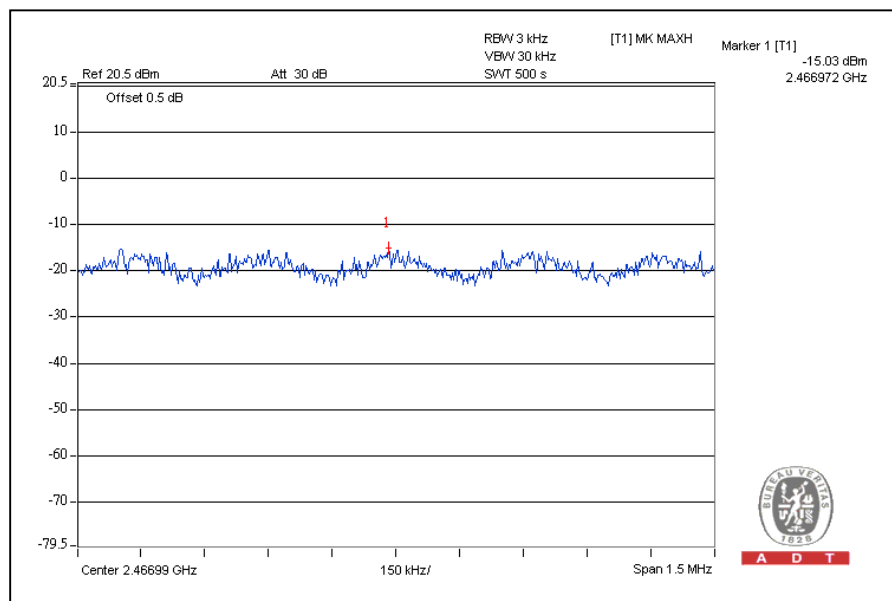

With Combiner : CH1

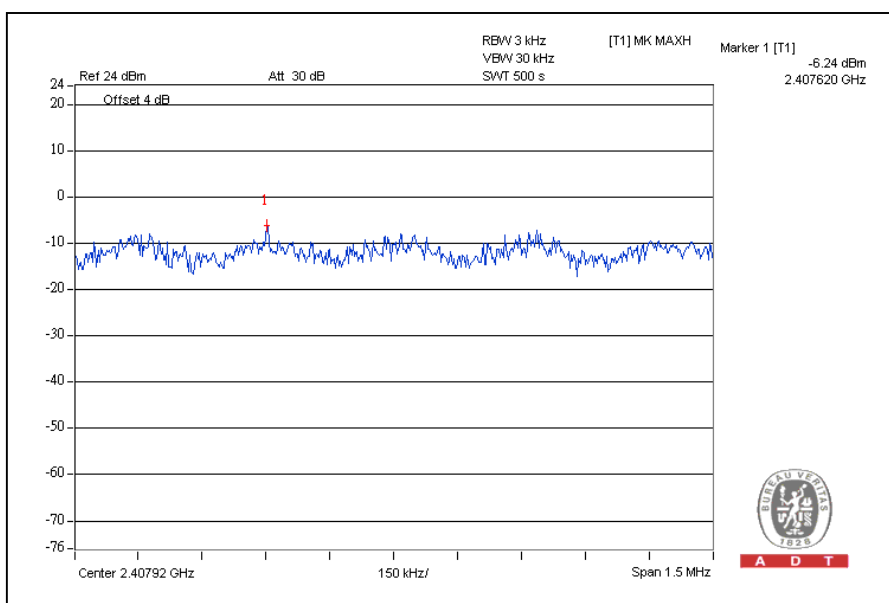


CH 6

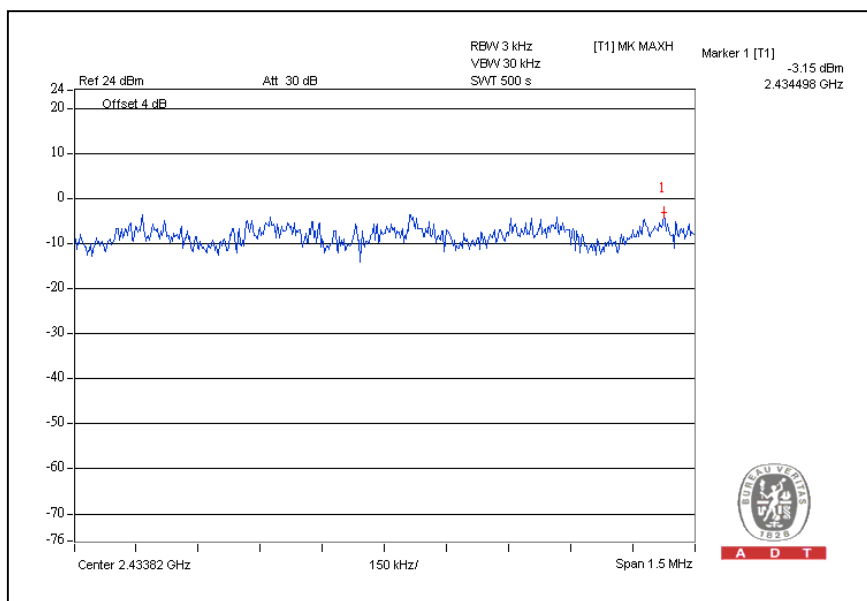



A D T

CH11

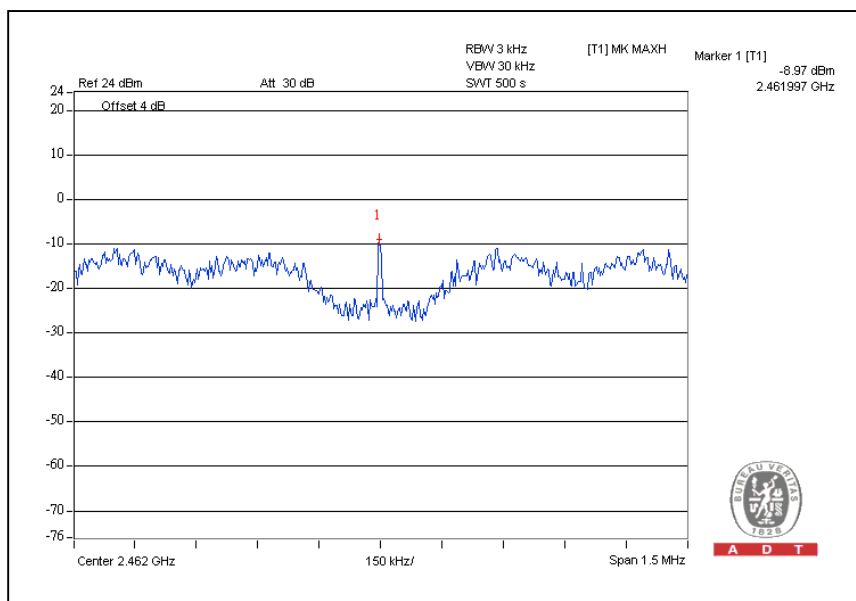



A D T


DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 962hPa
TESTED BY	Wen Yu		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY –With Combiner(dBm)	* TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2422	-12.85	-16.88	-10.07	-11.37	8	PASS
4	2437	-14.41	-14.22	-7.74	-11.31	8	PASS
7	2452	-16.59	-18.42	-12.56	-14.44	8	PASS

* Aggregate PSD across transmitters in linear power units across each transmitter output.

For Chain (0): CH1

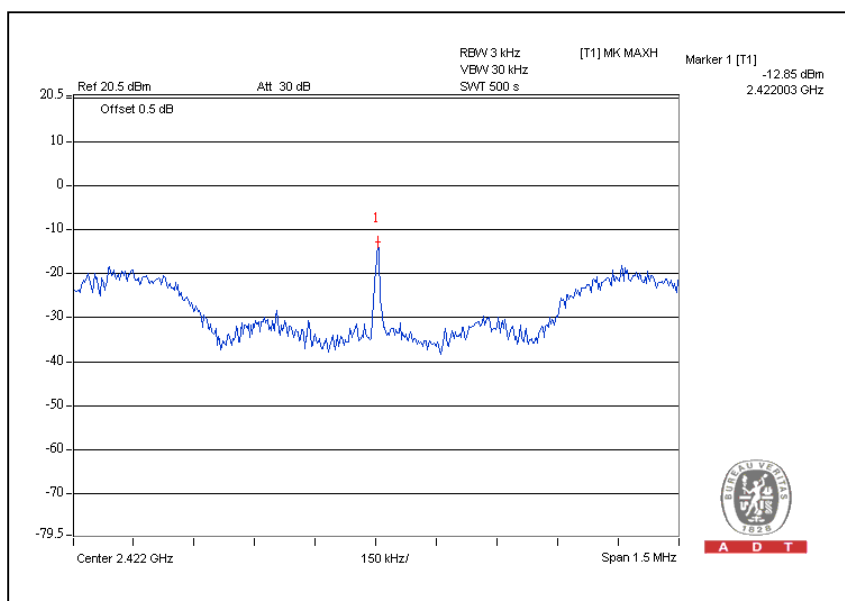


CH4

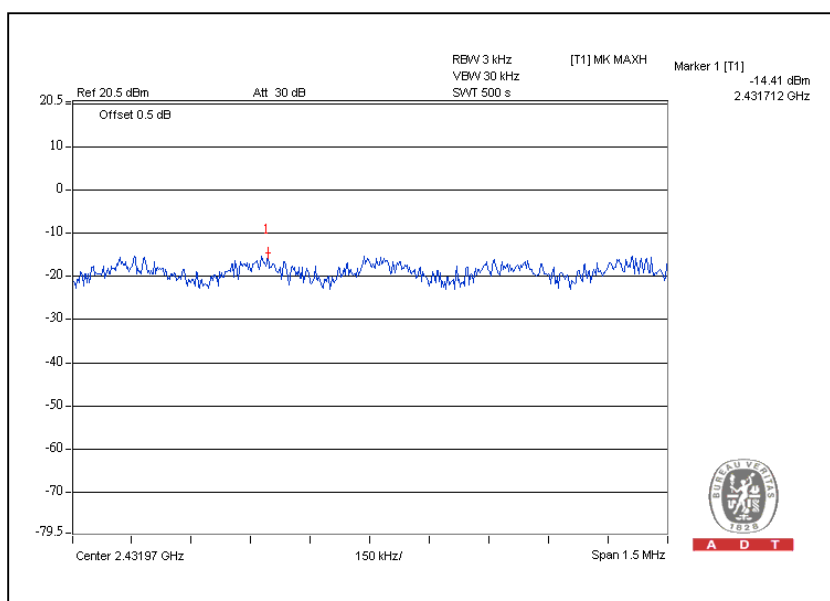




A D T


CH7

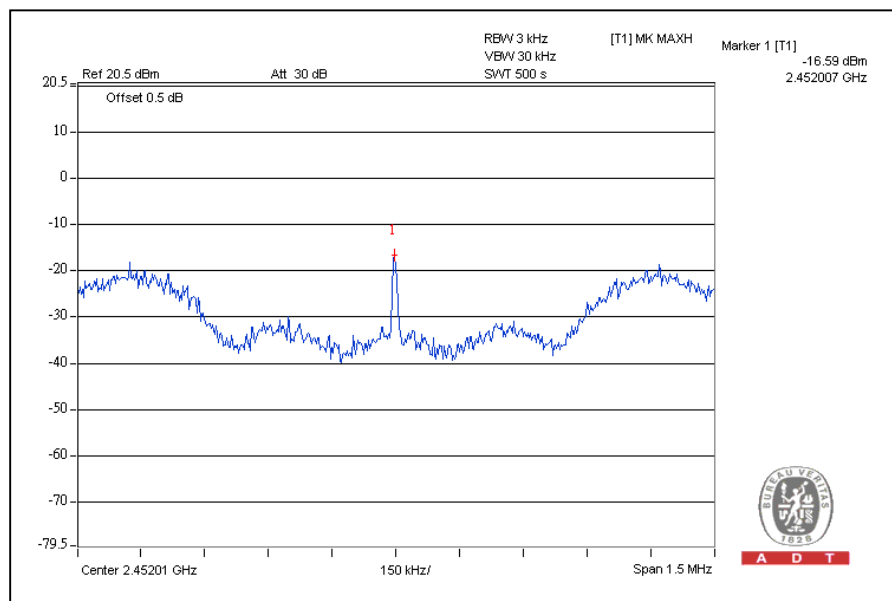

For Chain (1): CH1

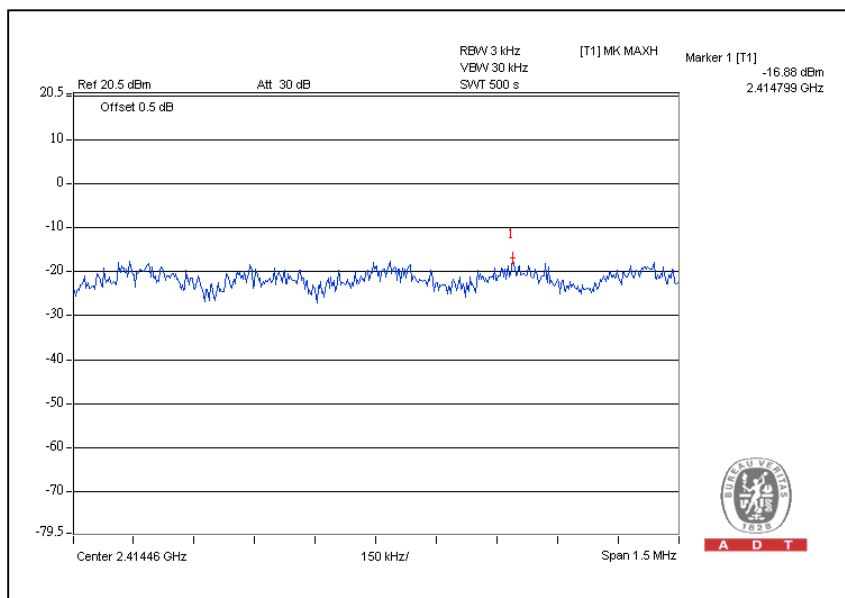


CH4

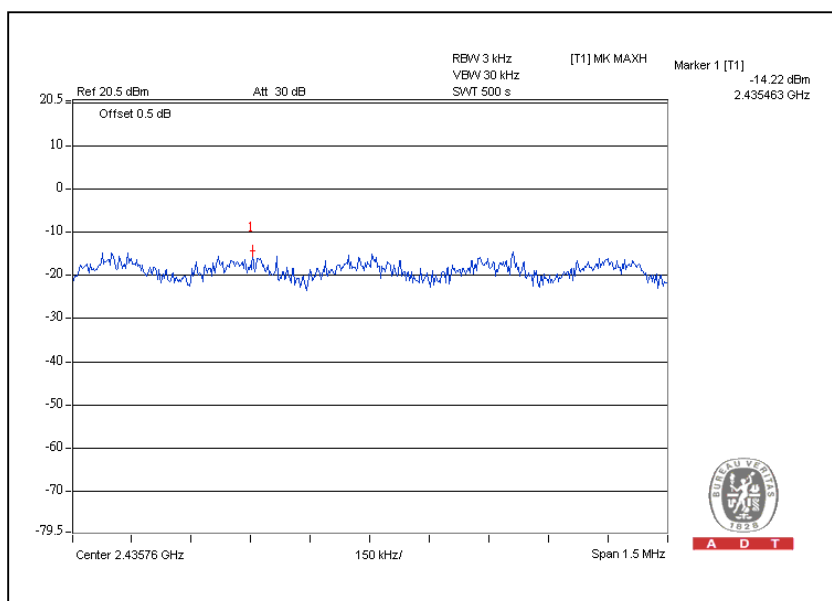




A D T


CH7

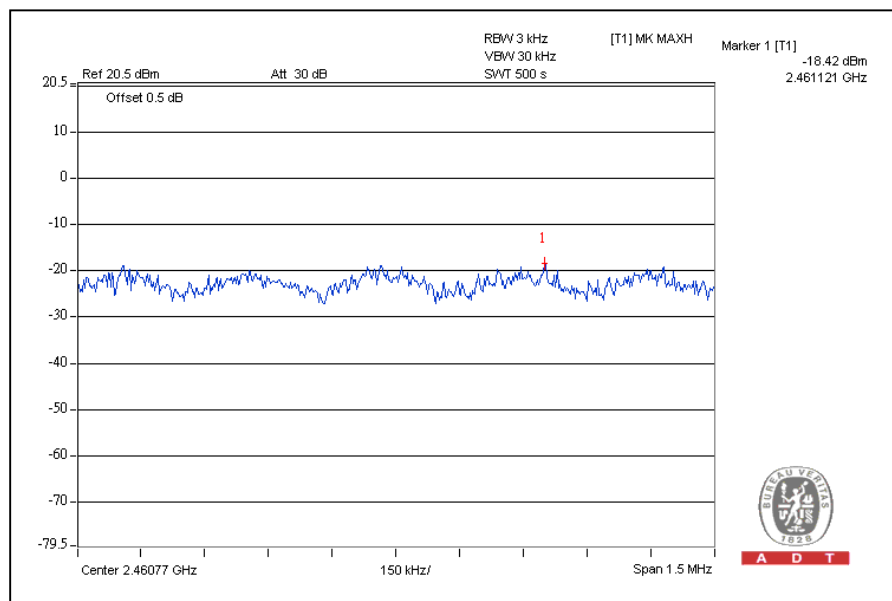

With Combiner : CH1

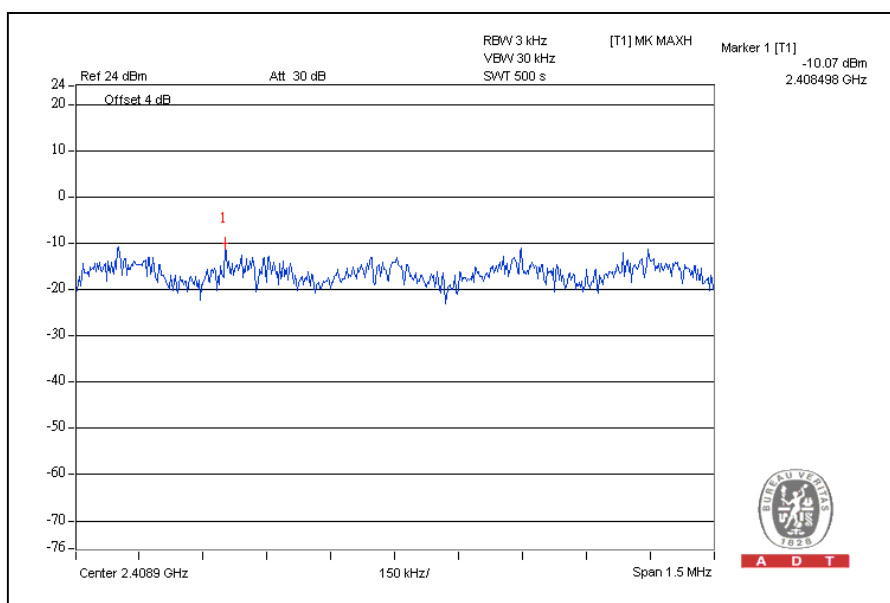


CH 4

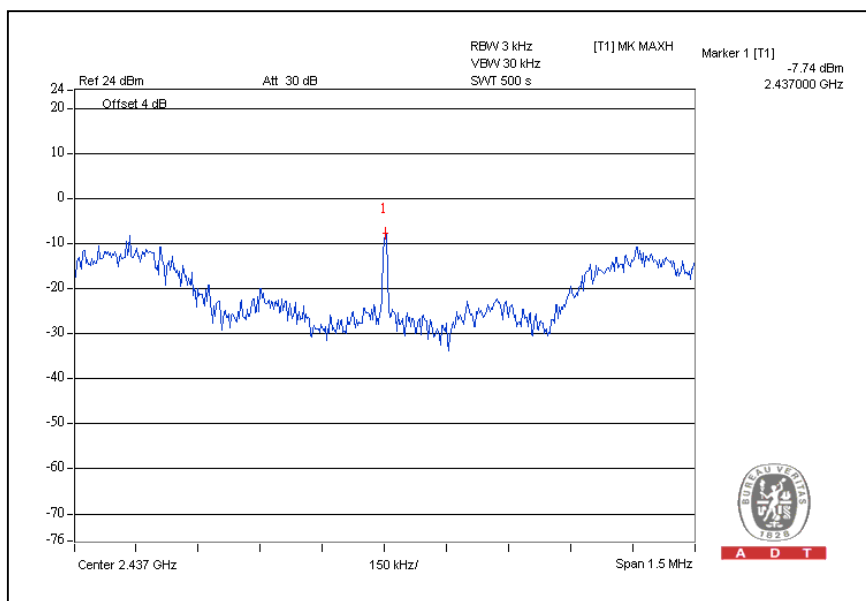



A D T

CH7

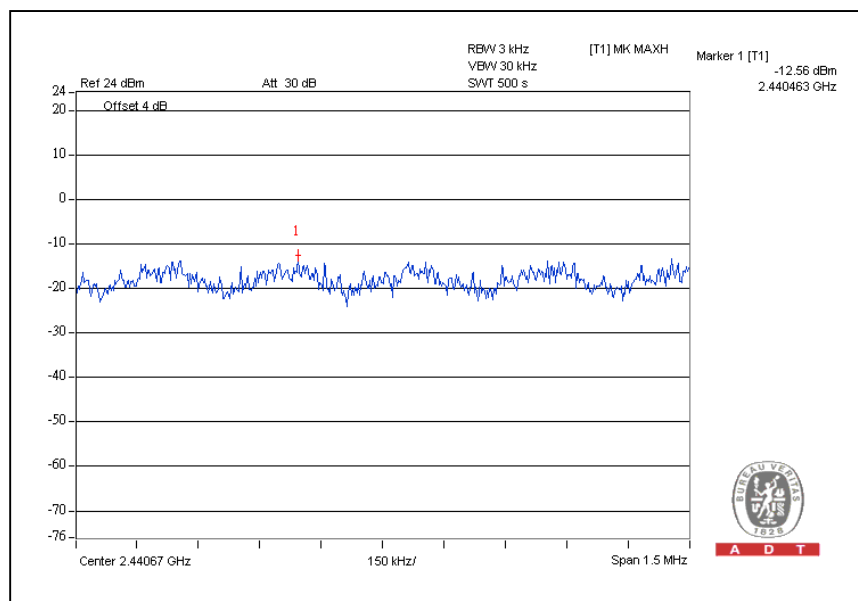

4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.7.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 09, 2009	Aug. 08, 2010

NOTE:

- 1.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

2. The measurement include through a combiner with both chain and each chain when operate simultaneously.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 EUT OPERATING CONDITION


Same as Item 4.3.6

4.7.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:


With combiner: CH1

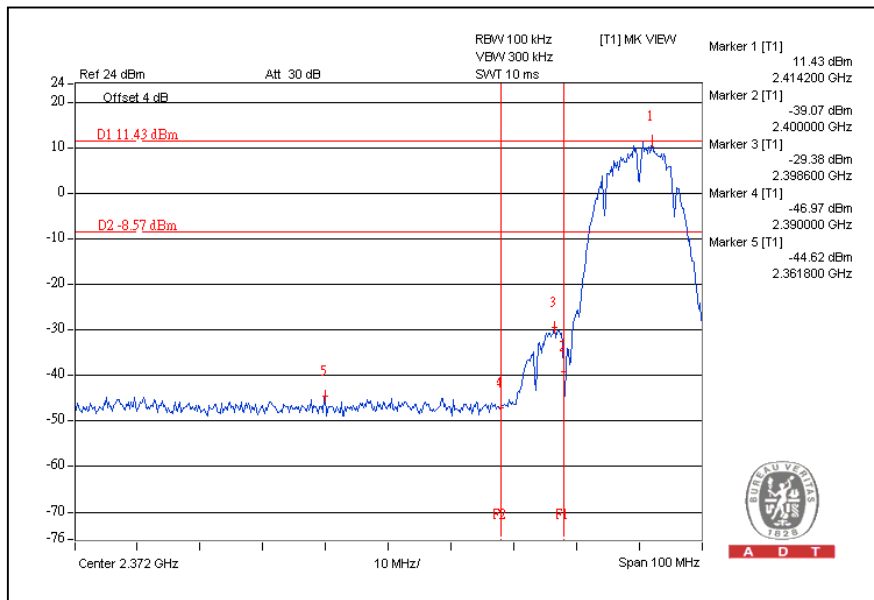


CH11

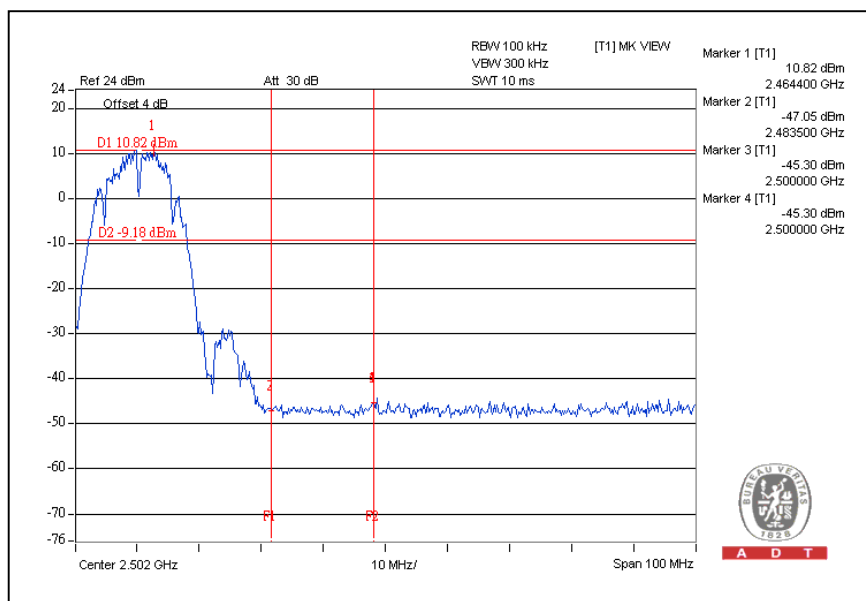


With combiner: CH1

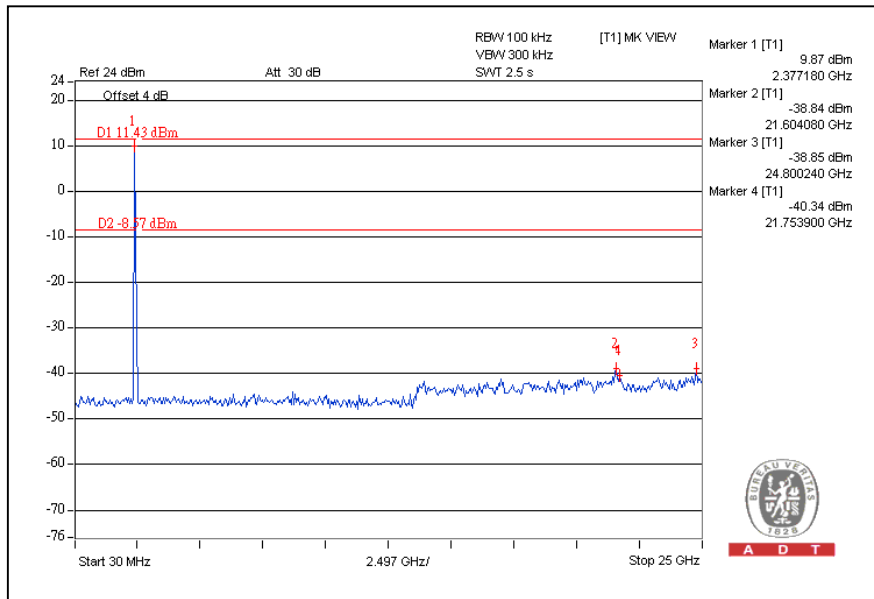


CH11

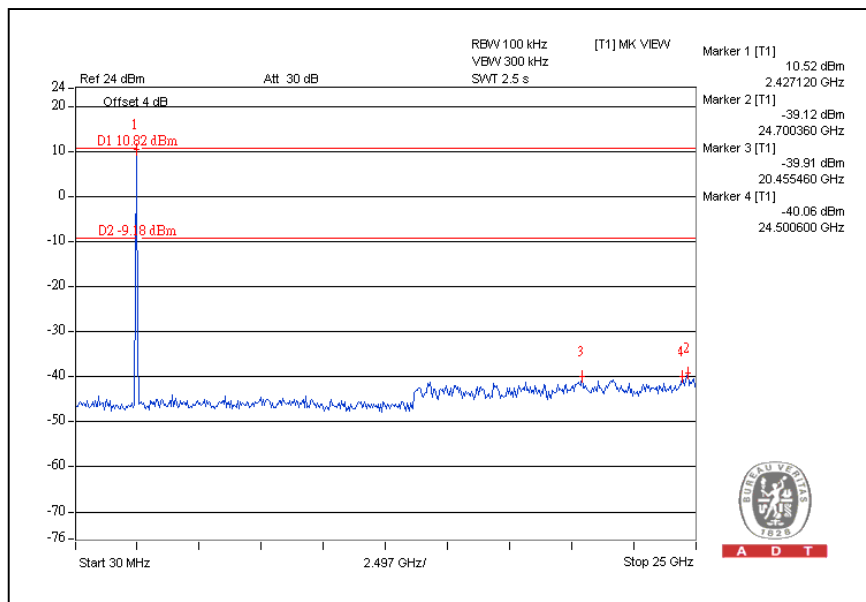


802.11g OFDM MODULATION: With combiner:CH1

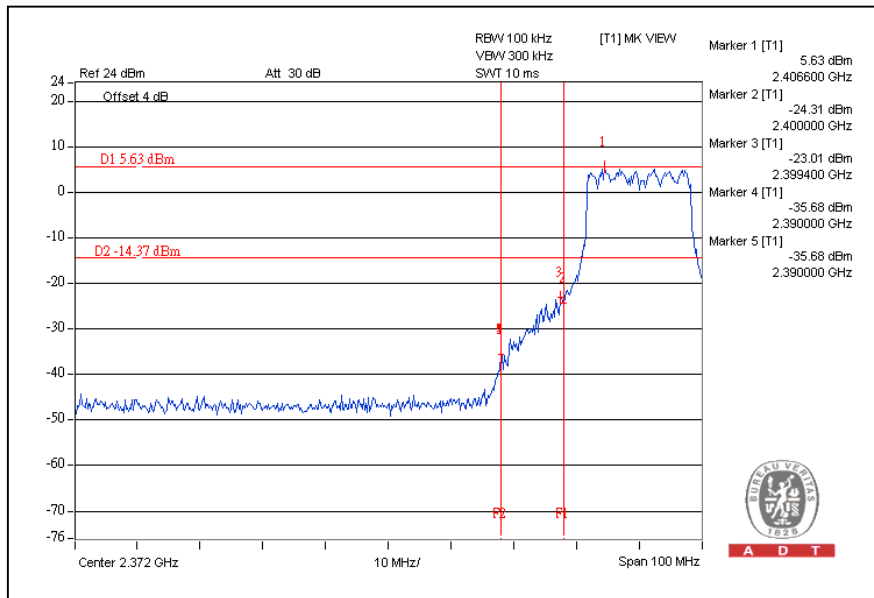


CH11

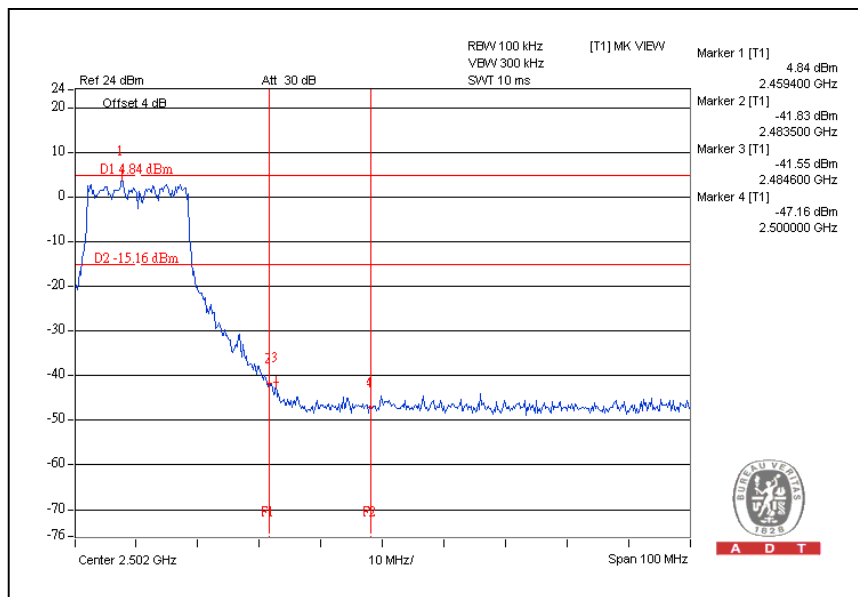

With combiner:CH1

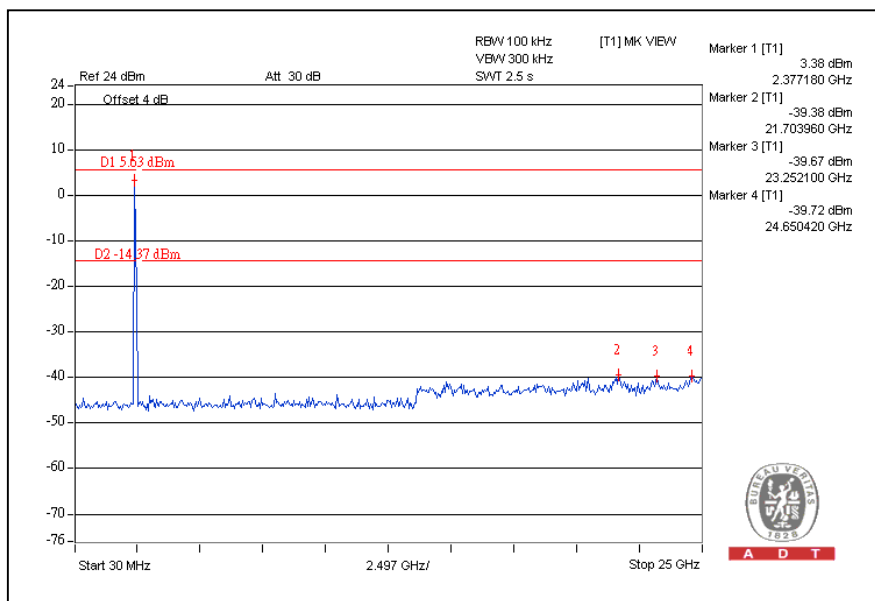


CH11

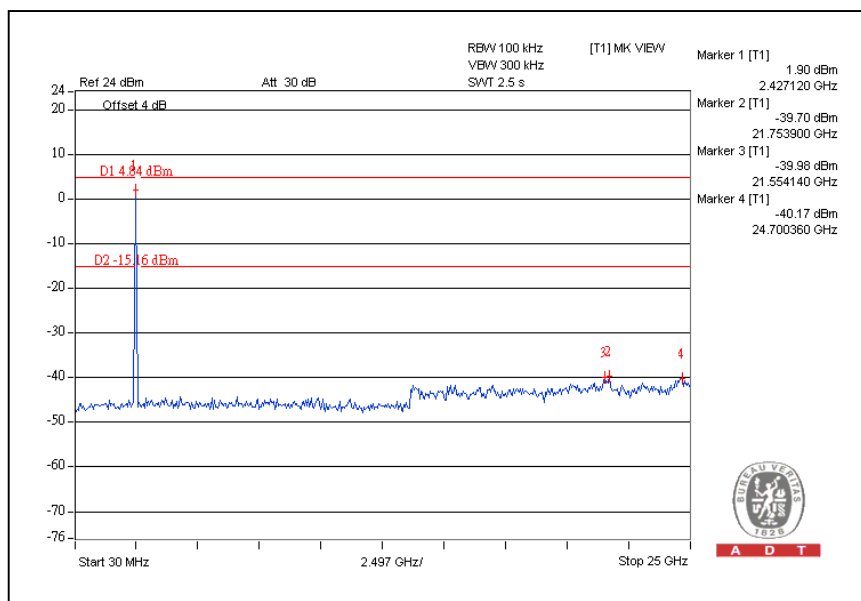


DRAFT 802.11n (20MHz) OFDM MODULATION:


With combiner:CH1

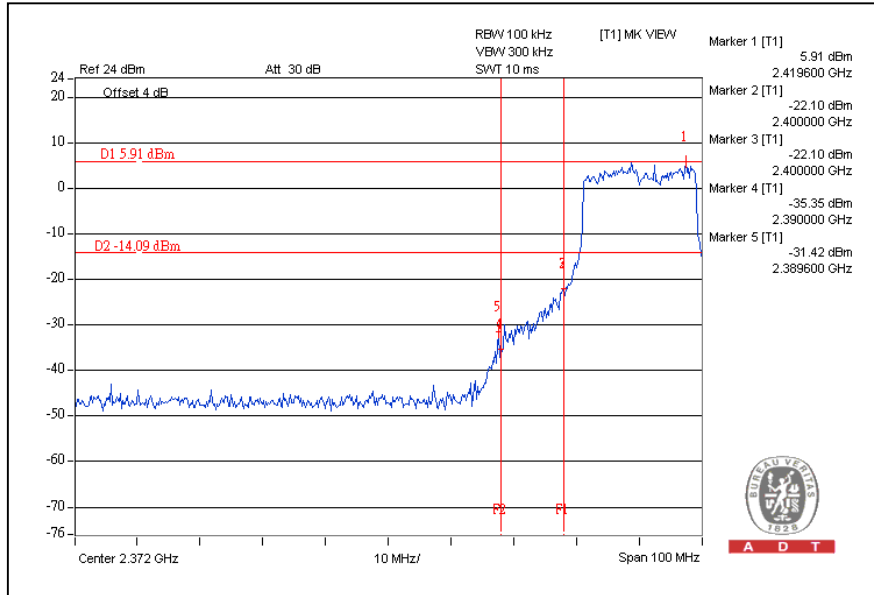


CH11

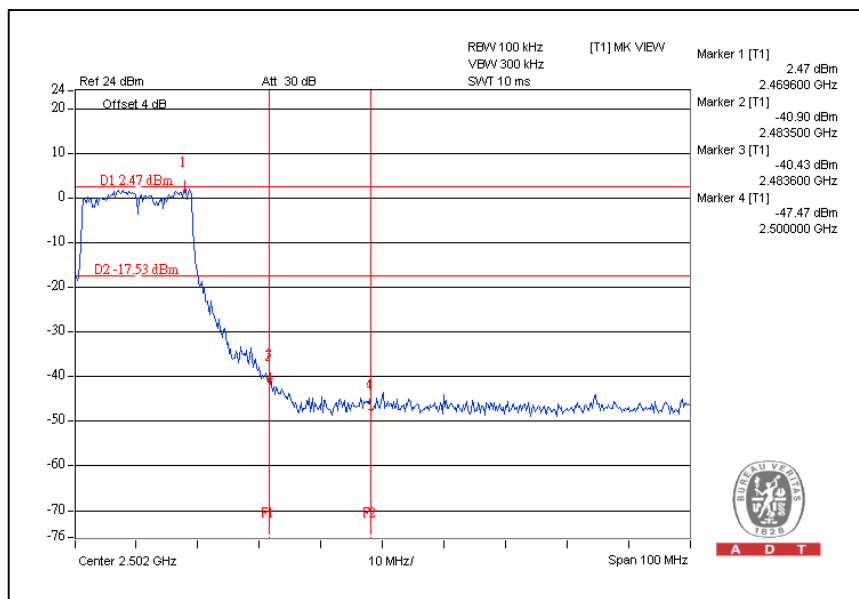

With combiner:CH1

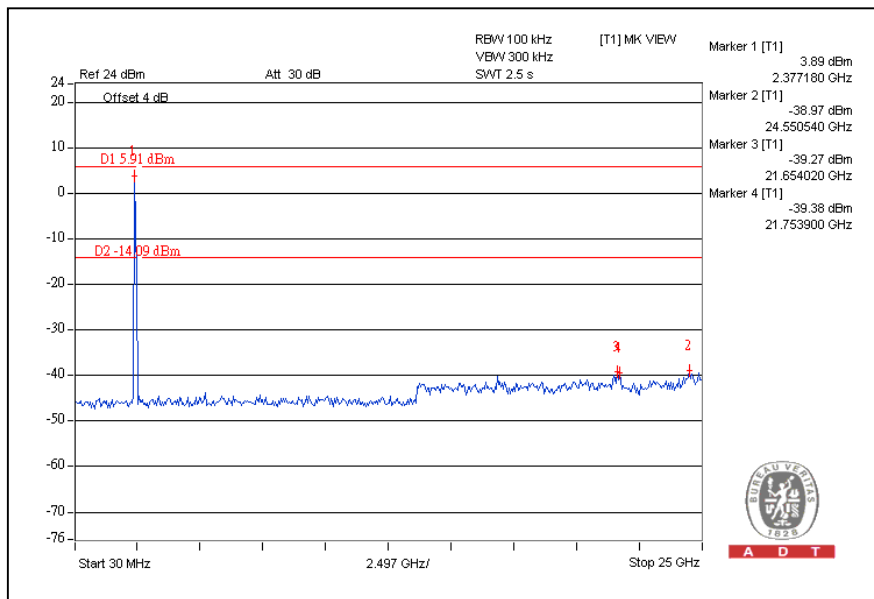


CH11

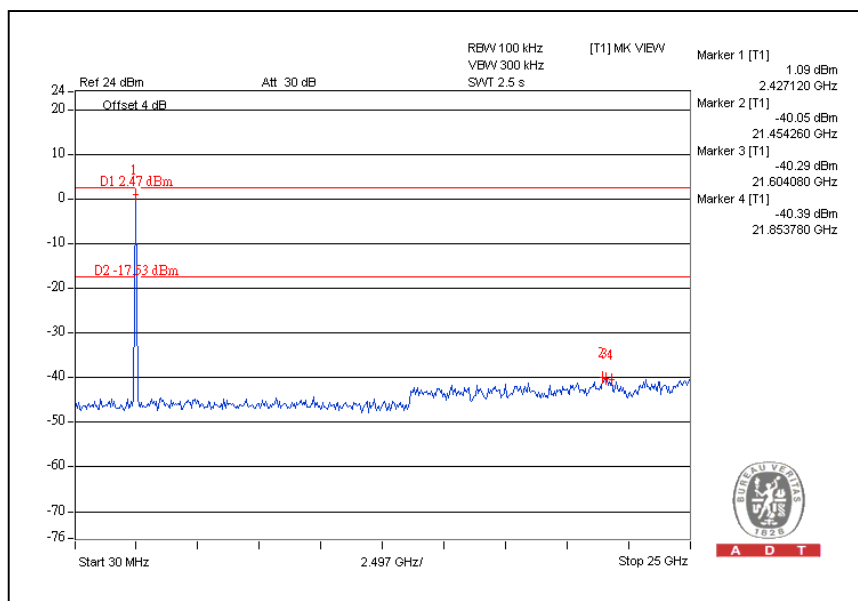


DRAFT 802.11n (40MHz) OFDM MODULATION:


With combiner:CH1

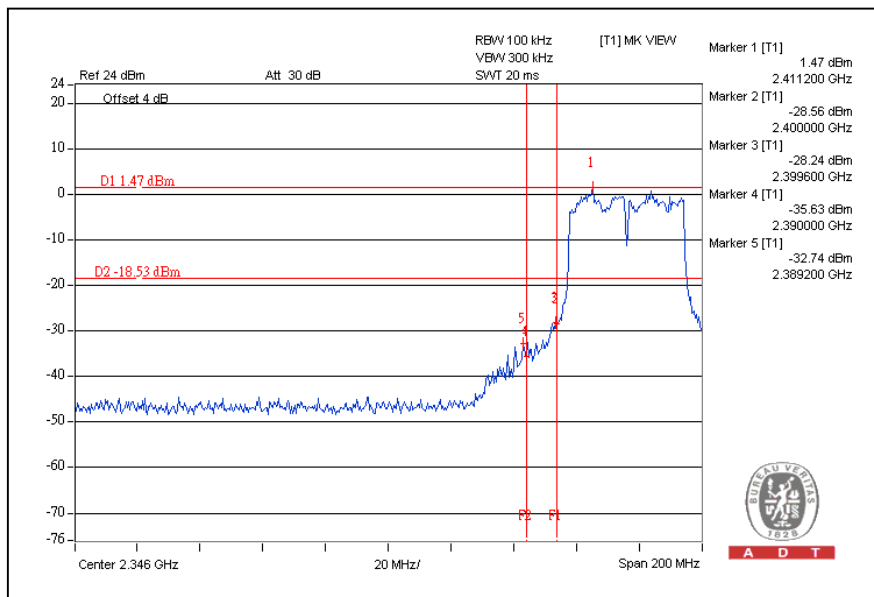


CH7

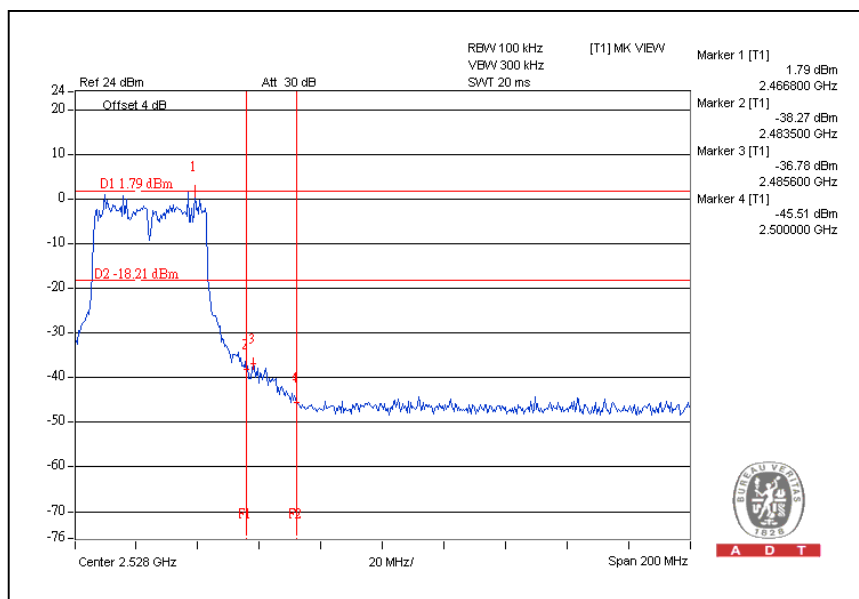

With combiner:CH1

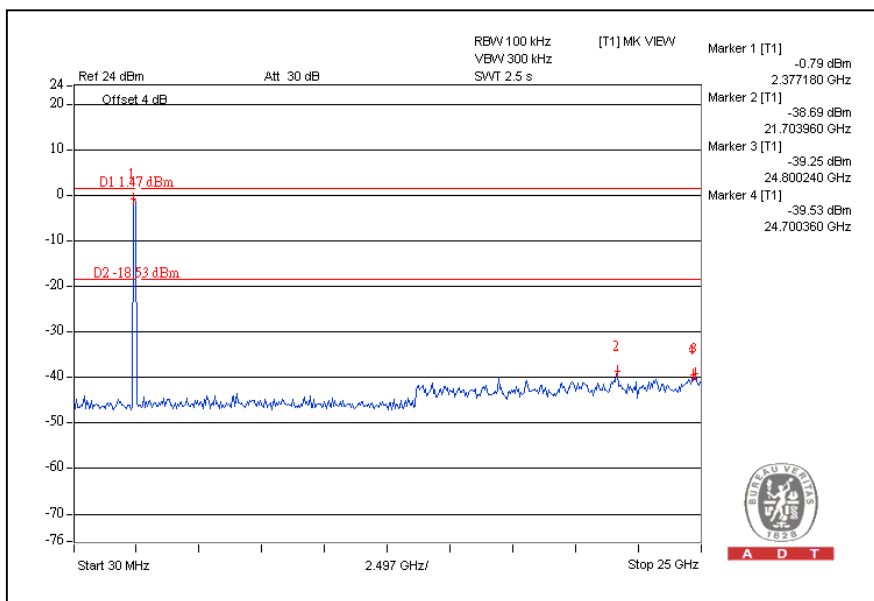

CH7

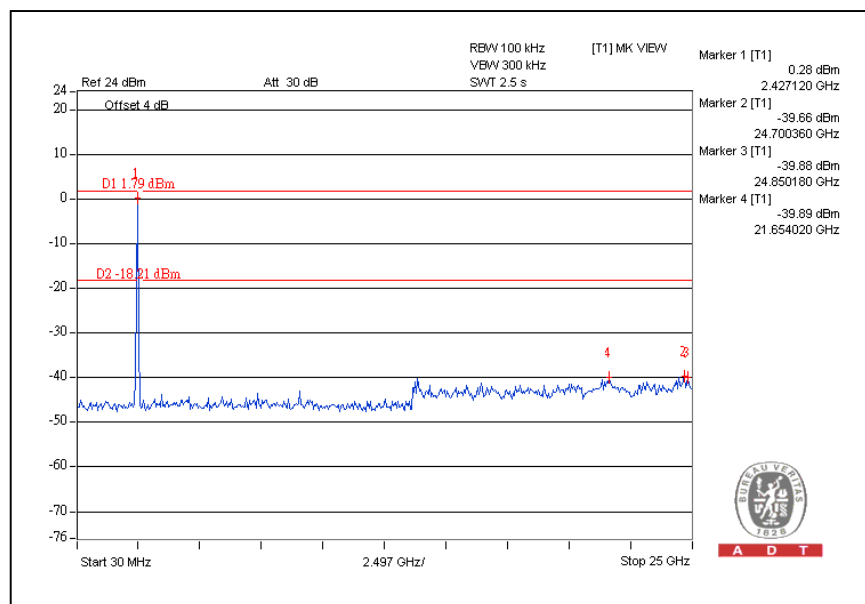

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



A D T

6.APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---